

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916401

Luminaire Tested: DFN2DIP-HX4F0-080D050US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916401
REPORT IS A COMBINATION OF REPORTS P899326 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-080D050US930-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9151.7 lumens
Efficiency: N/A
Efficacy: 86.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 105.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916401
CATALOG NUMBER: DFN2DIP-HX4F0-080D050US930-RLFL

Luminous Intensity Polar Plot

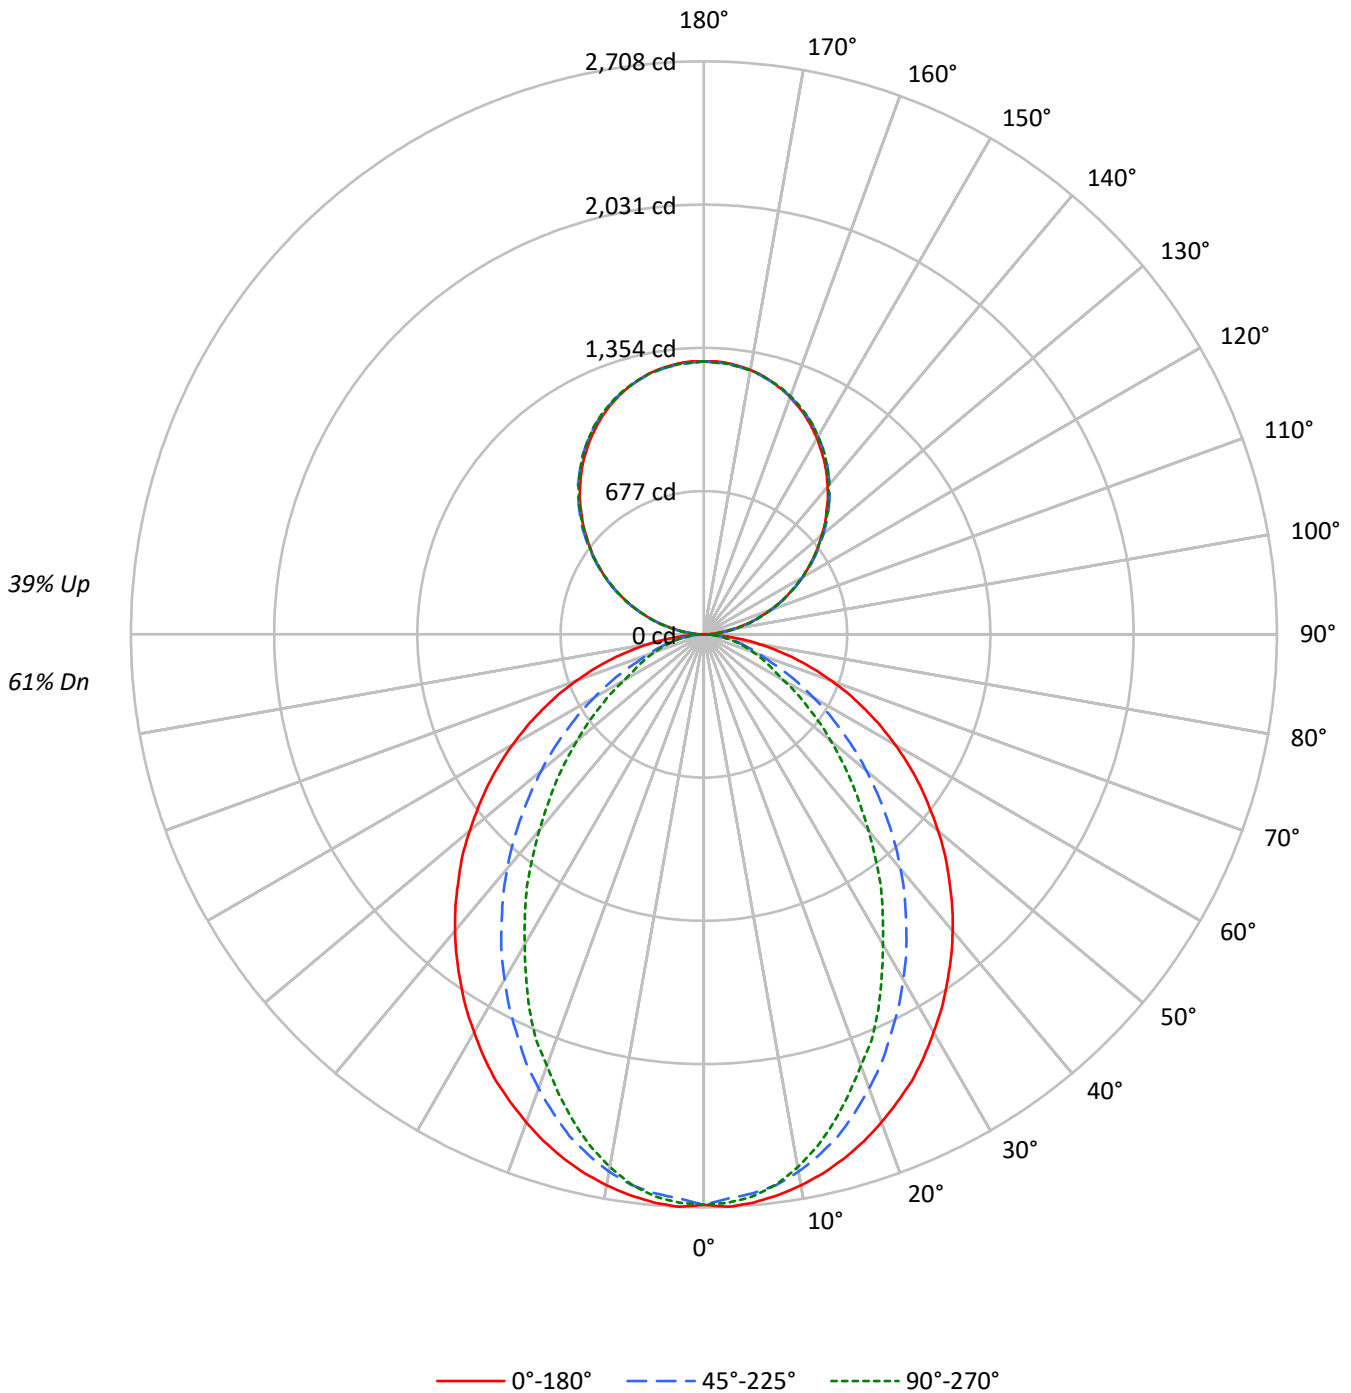



TEST NUMBER: P916401
 CATALOG NUMBER: DFN2DIP-HX4F0-080D050US930-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	66	66	66	61
1	101	97	93	89	94	91	87	84	79	77	75	69	67	65	59	58	57	59	58	57	52
2	92	85	79	74	86	80	75	70	70	66	63	61	58	56	53	51	49	53	51	49	45
3	85	75	68	62	79	71	64	59	62	57	53	55	51	48	47	45	42	47	45	42	39
4	78	67	59	53	72	63	56	51	56	50	46	49	45	41	43	39	37	43	39	37	34
5	72	60	52	46	67	57	50	44	50	45	40	44	40	36	39	35	32	39	35	32	30
6	66	54	46	41	62	51	44	39	46	40	35	40	36	32	35	32	29	35	32	29	26
7	61	49	41	36	57	47	39	34	42	36	32	37	32	29	32	29	26	32	29	26	24
8	57	45	37	32	53	43	36	31	38	32	28	34	29	26	30	26	23	30	26	23	21
9	53	41	34	29	50	39	32	28	35	29	26	31	27	23	28	24	21	28	24	21	19
10	50	38	31	26	47	36	29	25	32	27	23	29	25	21	26	22	20	26	22	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2004	2004	2004
5°	2008	1973	1985
10°	1988	1934	1921
15°	1961	1871	1821
20°	1925	1783	1699
25°	1888	1684	1580
30°	1838	1583	1430
35°	1790	1474	1298
40°	1740	1362	1147
45°	1683	1237	1010
50°	1623	1111	876
55°	1561	976	748
60°	1490	835	616
65°	1407	691	554
70°	1307	558	502
75°	1182	492	457
80°	1000	414	396
85°	699	277	299

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1683 cd/sqm



TEST NUMBER: P916401

CATALOG NUMBER: DFN2DIP-HX4F0-080D050US930-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	252.6	2.8
10°-20°	693.6	7.6
20°-30°	973.7	10.6
30°-40°	1061.4	11.6
40°-50°	975.6	10.7
50°-60°	766.2	8.4
60°-70°	498.7	5.4
70°-80°	256.7	2.8
80°-90°	69.2	0.8
90°-100°	79.8	0.9
100°-110°	253.5	2.8
110°-120°	433.8	4.7
120°-130°	570.5	6.2
130°-140°	640.4	7.0
140°-150°	627.9	6.9
150°-160°	526.8	5.8
160°-170°	349.3	3.8
170°-180°	122.1	1.3
0°-30°	1919.9	21.0
0°-40°	2981.4	32.6
0°-60°	4723.1	51.6
0°-90°	5547.7	60.6
90°-120°	767.0	8.4
90°-150°	2605.8	28.5
90°-180°	3604.0	39.4
0°-180°	9151.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2696	2696	2696	2696	2696	
5°	2696	2684	2652	2674	2666	256
15°	2564	2537	2454	2408	2384	722
25°	2327	2249	2088	1988	1952	1070
35°	2005	1881	1666	1513	1459	1255
45°	1639	1476	1220	1046	988	1266
55°	1246	1056	793	646	600	1114
65°	842	644	424	342	334	834
75°	449	278	195	178	176	475
85°	105	54	46	46	46	120
90°	1	14	38	36	37	9
95°	57	68	70	70	68	63
105°	234	237	240	241	241	247
115°	435	442	440	438	435	431
125°	633	643	640	636	635	566
135°	819	831	833	832	829	633
145°	994	1002	1008	1009	1005	621
155°	1137	1140	1144	1149	1145	523
165°	1237	1236	1236	1243	1238	349
175°	1287	1284	1282	1289	1283	122
180°	1289	1289	1289	1289	1289	



TEST NUMBER: P916401

CATALOG NUMBER: DFN2DIP-HX4F0-080D050US930-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2695.7	2695.7	2695.7	2695.7	2695.7
2.5°	2707.9	2695.7	2668.8	2693.3	2688.4
5°	2695.7	2683.6	2651.7	2673.7	2666.4
7.5°	2673.7	2659.2	2625.0	2634.6	2622.4
10°	2644.4	2627.4	2578.7	2571.2	2556.7
12.5°	2608.0	2586.0	2519.9	2505.4	2478.5
15°	2563.9	2537.0	2454.2	2407.9	2383.5
17.5°	2512.7	2473.6	2371.1	2317.6	2278.4
20°	2454.2	2405.3	2283.4	2222.6	2168.7
22.5°	2390.8	2334.6	2193.1	2110.2	2073.7
25°	2327.4	2249.2	2088.2	1988.3	1951.6
27.5°	2251.8	2168.7	1990.6	1876.0	1819.8
30°	2171.3	2078.4	1883.3	1759.0	1693.0
32.5°	2093.1	1980.8	1781.0	1634.5	1573.4
35°	2005.4	1880.9	1666.3	1512.6	1458.7
37.5°	1919.9	1785.7	1558.9	1390.4	1329.6
40°	1829.7	1683.4	1446.6	1273.4	1210.0
42.5°	1737.0	1580.9	1334.5	1153.9	1093.0
45°	1639.4	1475.9	1219.8	1046.4	988.0
47.5°	1546.8	1373.6	1110.1	936.7	883.1
50°	1444.2	1271.1	1002.7	834.2	783.2
52.5°	1344.1	1161.1	900.2	739.2	692.9
55°	1246.5	1056.3	792.8	646.5	600.2
57.5°	1146.6	951.5	697.8	561.2	522.0
60°	1044.1	849.0	597.6	473.4	434.3
62.5°	944.2	749.0	512.3	395.3	375.9
65°	841.7	643.9	424.4	341.7	334.1
67.5°	744.1	546.4	341.7	299.9	292.8
70°	641.6	451.4	282.9	258.5	248.7
72.5°	544.0	363.4	236.6	217.2	212.2
75°	448.8	278.0	195.2	178.1	175.8
77.5°	353.8	197.5	153.8	143.9	139.0
80°	265.8	141.6	117.0	107.4	107.4
82.5°	185.3	95.2	80.5	75.6	75.6
85°	104.8	53.6	46.3	46.3	46.3
87.5°	39.1	19.4	19.4	17.1	17.1
90°	1.1	14.0	38.1	35.8	36.9
92.5°	24.1	32.6	33.8	35.0	35.0
95°	56.7	67.7	69.5	69.5	67.7
97.5°	94.4	104.5	108.8	108.8	108.8
100°	137.9	146.9	150.0	150.0	148.9
102.5°	183.8	190.5	194.7	195.9	194.7
105°	234.0	237.1	239.5	241.3	241.3
107.5°	283.7	288.4	288.4	289.2	283.7
110°	331.9	338.2	338.2	338.2	335.0



TEST NUMBER: P916401

CATALOG NUMBER: DFN2DIP-HX4F0-080D050US930-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	384.0	390.6	389.5	386.4	384.0
115°	435.3	441.6	439.6	438.5	435.3
117.5°	486.2	494.8	489.3	486.2	483.1
120°	537.5	546.1	537.5	537.5	534.0
122.5°	584.2	595.1	589.6	586.5	584.2
125°	633.2	642.9	639.8	636.3	635.1
127.5°	680.9	693.0	688.8	684.0	680.9
130°	725.7	739.6	737.7	735.4	731.1
132.5°	775.8	786.7	787.5	782.0	778.9
135°	819.0	831.0	833.3	832.2	829.1
137.5°	867.2	876.9	878.8	878.0	873.3
140°	909.5	919.2	924.6	924.6	920.4
142.5°	953.0	962.8	965.9	967.0	962.8
145°	994.3	1002.0	1008.2	1009.4	1005.1
147.5°	1031.2	1040.9	1045.5	1047.5	1043.2
150°	1069.3	1075.9	1080.1	1083.6	1080.1
152.5°	1103.1	1109.7	1115.1	1119.4	1115.1
155°	1136.9	1140.0	1143.5	1148.9	1145.4
157.5°	1166.0	1168.3	1170.3	1178.1	1172.6
160°	1192.0	1194.4	1195.6	1202.2	1197.5
162.5°	1216.2	1216.2	1217.3	1224.7	1219.3
165°	1236.8	1235.6	1235.6	1243.4	1237.9
167.5°	1255.4	1251.9	1251.9	1259.7	1254.3
170°	1269.4	1266.3	1265.2	1272.9	1266.3
172.5°	1279.1	1276.0	1274.9	1282.6	1276.0
175°	1286.9	1283.8	1281.5	1289.2	1282.6
177.5°	1291.2	1288.1	1285.7	1292.3	1285.7
180°	1289.2	1289.2	1289.2	1289.2	1289.2



TEST NUMBER: P916401
 CATALOG NUMBER: DFN2DIP-HX4F0-080D050US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.50	11.43	11.37	12.31	13.42	6.47	7.40	7.34	8.28	9.40
	3H	12.19	13.01	13.07	13.91	15.05	7.67	8.50	8.55	9.39	10.53
	4H	12.80	13.58	13.70	14.48	15.63	8.13	8.91	9.02	9.81	10.96
	6H	13.23	13.95	14.13	14.85	16.01	8.45	9.17	9.36	10.08	11.24
	8H	13.36	14.04	14.27	14.96	16.13	8.55	9.23	9.46	10.16	11.32
	12H	13.42	14.07	14.34	14.99	16.18	8.60	9.25	9.52	10.16	11.35
4H	2H	10.53	11.31	11.43	12.21	13.36	7.08	7.86	7.98	8.76	9.91
	3H	12.37	13.02	13.28	13.95	15.11	8.44	9.09	9.35	10.02	11.19
	4H	13.07	13.66	13.99	14.58	15.77	8.99	9.59	9.92	10.51	11.70
	6H	13.59	14.10	14.52	15.05	16.24	9.42	9.93	10.36	10.88	12.07
	8H	13.77	14.24	14.70	15.18	16.39	9.55	10.03	10.49	10.97	12.18
	12H	13.86	14.29	14.82	15.25	16.46	9.62	10.05	10.58	11.01	12.22
8H	4H	13.04	13.52	13.98	14.46	15.67	9.28	9.76	10.22	10.70	11.91
	6H	13.61	14.00	14.58	14.99	16.19	9.81	10.20	10.77	11.19	12.39
	8H	13.83	14.18	14.80	15.15	16.37	10.00	10.35	10.97	11.32	12.54
	12H	13.97	14.28	14.95	15.25	16.52	10.12	10.43	11.10	11.40	12.67
12H	4H	13.00	13.43	13.95	14.39	15.60	9.29	9.72	10.25	10.68	11.89
	6H	13.59	13.93	14.56	14.91	16.13	9.86	10.20	10.83	11.18	12.40
	8H	13.81	14.12	14.79	15.09	16.36	10.07	10.38	11.05	11.35	12.62