

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P928716

Luminaire Tested: DFN2DIP-HX4F0-100D060US930-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P928716
REPORT IS A COMBINATION OF REPORTS P900867 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-100D060US930-FLLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12909.6 lumens
Efficiency: N/A
Efficacy: 90.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 143.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.946
Total Harmonic Distortion (THDi): 0.132
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P928716

CATALOG NUMBER: DFN2DIP-HX4F0-100D060US930-FLLONL

Luminous Intensity Polar Plot

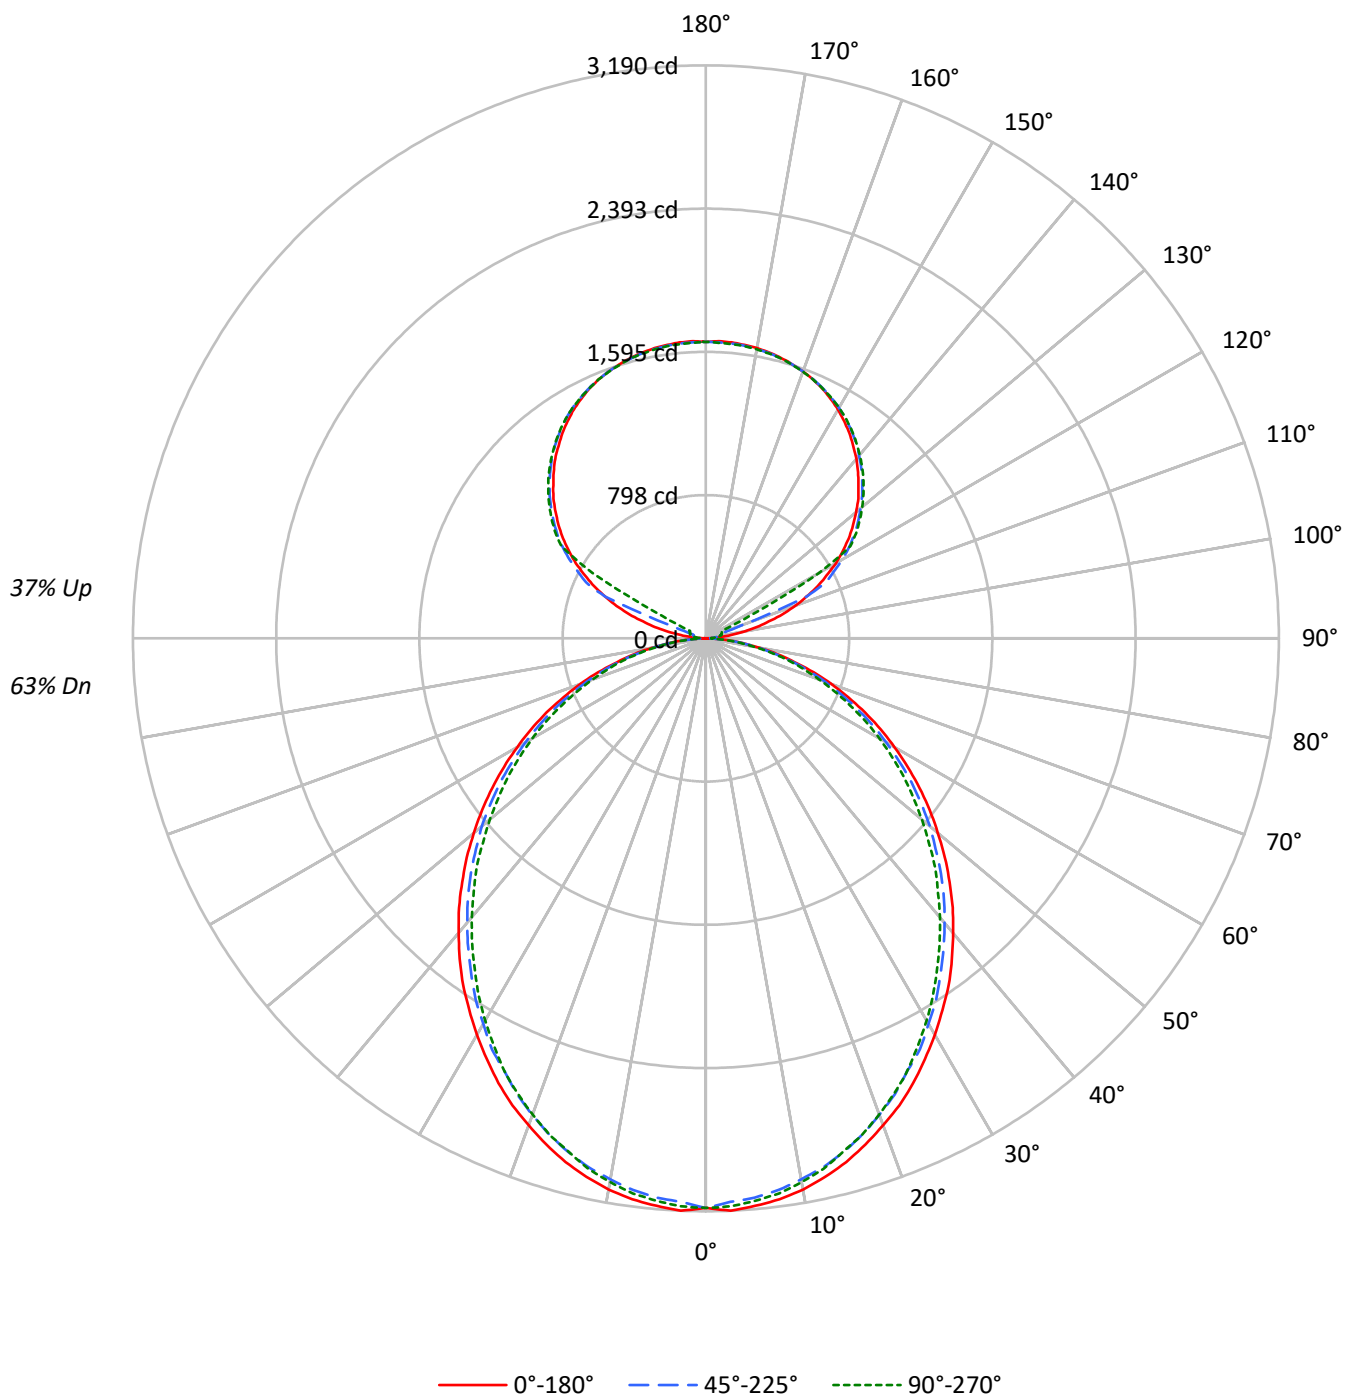

TEST NUMBER: P928716

CATALOG NUMBER: DFN2DIP-HX4F0-100D060US930-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	110	110	110	110		103	103	103	103		90	90	90		78	78	78		68	68	68
1	101	96	92	89		94	90	87	84		79	77	74		69	67	65		60	58	57
2	92	84	78	72		86	79	73	69		69	65	62		61	58	55		53	50	48
3	84	74	66	60		78	70	63	57		61	56	52		54	50	46		47	44	41
4	77	65	57	51		71	62	54	49		55	49	44		48	43	40		42	38	35
5	70	58	50	44		66	55	48	42		49	43	38		43	38	34		38	34	31
6	65	53	44	38		61	50	42	37		44	38	33		39	34	30		34	30	27
7	60	47	39	34		56	45	38	32		40	34	30		35	31	27		31	27	24
8	56	43	35	30		52	41	34	29		37	31	26		33	28	24		29	25	22
9	52	40	32	27		49	37	30	26		34	28	24		30	25	22		27	23	20
10	49	36	29	24		46	34	28	23		31	25	21		28	23	20		25	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2358	2358	2358
5°	2362	2325	2341
10°	2343	2294	2309
15°	2309	2257	2260
20°	2262	2204	2209
25°	2216	2142	2151
30°	2158	2084	2076
35°	2104	2015	1998
40°	2036	1946	1923
45°	1969	1876	1846
50°	1895	1803	1757
55°	1818	1719	1676
60°	1731	1619	1582
65°	1637	1516	1472
70°	1516	1389	1354
75°	1348	1238	1244
80°	1147	1045	1035
85°	833	713	689

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1969 cd/sqm

TEST NUMBER: P928716

CATALOG NUMBER: DFN2DIP-HX4F0-100D060US930-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	298.5	2.3
10°-20°	839.8	6.5
20°-30°	1234.2	9.6
30°-40°	1433.4	11.1
40°-50°	1431.6	11.1
50°-60°	1248.3	9.7
60°-70°	922.8	7.1
70°-80°	522.1	4.0
80°-90°	140.7	1.1
90°-100°	54.4	0.4
100°-110°	202.9	1.6
110°-120°	538.0	4.2
120°-130°	892.3	6.9
130°-140°	947.9	7.3
140°-150°	880.9	6.8
150°-160°	708.2	5.5
160°-170°	456.4	3.5
170°-180°	157.1	1.2
0°-30°	2372.4	18.4
0°-40°	3805.8	29.5
0°-60°	6485.8	50.2
0°-90°	8071.4	62.5
90°-120°	795.3	6.2
90°-150°	3516.4	27.2
90°-180°	4838.0	37.5
0°-180°	12909.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3171	3171	3171	3171	3171	
5°	3171	3159	3126	3150	3144	301
15°	3019	3001	2961	2973	2958	850
25°	2732	2708	2656	2662	2656	1257
35°	2357	2327	2278	2260	2244	1472
45°	1918	1897	1851	1818	1805	1480
55°	1452	1433	1397	1360	1345	1298
65°	979	961	930	903	888	968
75°	512	506	491	473	479	547
85°	125	122	119	110	107	139
90°	1	14	24	30	32	12
95°	78	38	46	53	51	92
105°	363	399	73	86	91	388
115°	687	707	737	184	98	676
125°	971	986	1009	1017	1021	866
135°	1201	1220	1231	1243	1241	928
145°	1394	1392	1413	1421	1415	872
155°	1534	1524	1538	1545	1536	707
165°	1617	1610	1613	1622	1613	457
175°	1654	1646	1648	1656	1644	157
180°	1650	1650	1650	1650	1650	

TEST NUMBER: P928716

CATALOG NUMBER: DFN2DIP-HX4F0-100D060US930-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3171.2	3171.2	3171.2	3171.2	3171.2
2.5°	3189.7	3174.4	3140.8	3171.2	3165.4
5°	3171.2	3159.3	3125.6	3149.9	3144.0
7.5°	3149.9	3131.7	3098.1	3122.7	3116.6
10°	3116.6	3095.2	3058.6	3082.9	3073.9
12.5°	3070.6	3052.5	3015.9	3031.1	3025.0
15°	3018.8	3000.7	2960.9	2973.2	2958.0
17.5°	2954.8	2936.7	2896.8	2912.1	2896.8
20°	2884.5	2866.4	2823.7	2832.8	2820.8
22.5°	2814.7	2787.2	2747.4	2747.4	2741.3
25°	2732.2	2707.9	2656.2	2662.0	2656.2
27.5°	2640.6	2619.2	2579.8	2570.8	2555.5
30°	2549.4	2524.8	2479.1	2470.1	2457.8
32.5°	2451.7	2433.6	2384.7	2366.3	2354.0
35°	2357.2	2326.8	2277.9	2259.5	2244.3
37.5°	2250.5	2222.9	2174.1	2152.7	2137.5
40°	2140.8	2116.1	2067.3	2040.2	2027.9
42.5°	2034.0	2009.4	1960.9	1930.2	1912.1
45°	1918.2	1896.8	1850.9	1817.5	1805.3
47.5°	1805.3	1784.0	1735.1	1701.4	1683.3
50°	1686.2	1671.0	1628.3	1585.6	1570.4
52.5°	1570.4	1549.1	1509.5	1476.0	1454.6
55°	1451.7	1433.3	1396.7	1360.1	1344.9
57.5°	1332.6	1317.4	1277.6	1241.1	1228.8
60°	1213.5	1201.6	1158.8	1125.2	1116.1
62.5°	1097.7	1076.4	1046.0	1015.6	1003.3
65°	979.0	960.6	930.2	902.6	887.5
67.5°	857.1	841.5	814.3	793.0	780.7
70°	744.1	731.8	704.3	683.0	671.0
72.5°	628.3	616.0	600.8	579.5	570.3
75°	512.1	506.4	490.8	472.7	478.8
77.5°	408.6	396.3	390.1	381.1	372.0
80°	305.1	301.9	295.7	286.6	280.5
82.5°	207.4	207.4	204.5	192.2	192.2
85°	124.9	122.0	119.1	109.7	106.8
87.5°	55.0	48.8	42.7	33.7	30.4
90°	1.1	14.3	23.8	29.9	32.2
92.5°	29.9	25.1	28.6	31.1	32.2
95°	77.6	38.1	46.5	52.6	51.3
97.5°	139.7	41.8	60.8	64.5	65.7
100°	211.4	47.8	68.1	77.6	80.0
102.5°	290.1	287.9	70.5	83.5	87.2
105°	363.0	398.9	72.9	85.9	90.8
107.5°	447.8	477.6	75.3	88.3	93.2
110°	529.1	554.0	209.0	89.6	94.3

TEST NUMBER: P928716

CATALOG NUMBER: DFN2DIP-HX4F0-100D060US930-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	605.5	626.9	606.6	91.9	95.6
115°	686.6	706.9	736.8	183.9	98.0
117.5°	757.1	780.9	801.3	630.5	317.6
120°	835.9	853.8	875.4	889.7	728.4
122.5°	902.7	921.8	945.8	952.9	954.2
125°	970.8	986.4	1009.1	1017.4	1021.0
127.5°	1032.9	1049.6	1067.6	1079.5	1080.7
130°	1091.4	1110.6	1123.6	1136.8	1135.7
132.5°	1151.2	1166.8	1179.8	1190.6	1189.4
135°	1201.4	1220.5	1231.1	1243.2	1240.8
137.5°	1253.8	1268.1	1280.2	1292.1	1288.6
140°	1305.1	1314.8	1327.9	1338.6	1332.7
142.5°	1348.3	1356.6	1372.1	1381.6	1375.6
145°	1393.6	1392.3	1412.6	1421.0	1415.1
147.5°	1432.9	1429.3	1449.6	1455.6	1450.9
150°	1471.2	1462.8	1482.0	1489.1	1483.1
152.5°	1503.4	1493.9	1511.7	1519.0	1510.6
155°	1534.5	1523.8	1538.1	1545.2	1535.7
157.5°	1559.6	1550.0	1560.8	1569.2	1559.6
160°	1581.1	1573.8	1581.1	1588.2	1579.9
162.5°	1600.1	1593.0	1598.9	1607.3	1596.6
165°	1616.9	1609.8	1613.3	1621.7	1613.3
167.5°	1630.0	1622.8	1626.5	1634.9	1624.1
170°	1640.8	1633.6	1636.0	1644.3	1633.6
172.5°	1647.9	1640.8	1643.2	1651.6	1640.8
175°	1653.9	1645.5	1647.9	1656.2	1644.3
177.5°	1656.2	1647.9	1649.2	1657.5	1646.8
180°	1650.3	1650.3	1650.3	1650.3	1650.3

TEST NUMBER: P928716

CATALOG NUMBER: DFN2DIP-HX4F0-100D060US930-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.33	12.32	12.18	13.18	14.27	10.90	11.89	11.74	12.75	13.83
	3H	13.01	13.89	13.86	14.76	15.87	12.53	13.42	13.39	14.29	15.40
	4H	13.60	14.44	14.47	15.32	16.43	13.13	13.96	14.00	14.84	15.96
	6H	14.01	14.78	14.89	15.66	16.80	13.53	14.30	14.41	15.19	16.32
	8H	14.11	14.85	15.01	15.76	16.89	13.64	14.37	14.53	15.28	16.41
	12H	14.17	14.87	15.06	15.77	16.92	13.69	14.39	14.58	15.29	16.44
4H	2H	11.81	12.65	12.69	13.53	14.65	11.47	12.30	12.34	13.18	14.30
	3H	13.69	14.39	14.58	15.30	16.43	13.30	14.00	14.18	14.91	16.04
	4H	14.41	15.05	15.31	15.96	17.11	14.00	14.64	14.90	15.55	16.71
	6H	14.93	15.48	15.85	16.42	17.58	14.52	15.07	15.44	16.01	17.17
	8H	15.09	15.60	16.00	16.53	17.70	14.67	15.19	15.59	16.12	17.29
	12H	15.17	15.63	16.10	16.58	17.75	14.74	15.21	15.68	16.15	17.33
8H	4H	14.62	15.13	15.53	16.06	17.23	14.26	14.77	15.17	15.70	16.87
	6H	15.26	15.68	16.20	16.65	17.82	14.89	15.32	15.84	16.29	17.46
	8H	15.48	15.86	16.43	16.81	18.01	15.11	15.49	16.06	16.45	17.64
	12H	15.62	15.95	16.57	16.90	18.14	15.23	15.56	16.19	16.52	17.76
12H	4H	14.61	15.07	15.55	16.02	17.20	14.26	14.72	15.19	15.67	16.85
	6H	15.29	15.66	16.24	16.62	17.81	14.93	15.31	15.89	16.27	17.46
	8H	15.54	15.87	16.49	16.82	18.06	15.18	15.51	16.13	16.46	17.70