

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P928846

Luminaire Tested: DFN2DIP-HX4F0-040D110US935-RLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P928846
REPORT IS A COMBINATION OF REPORTS P900946 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-040D110US935-RLLONL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12303.6 lumens
Efficiency: N/A
Efficacy: 102.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 120.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P928846

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US935-RLLONL

Luminous Intensity Polar Plot

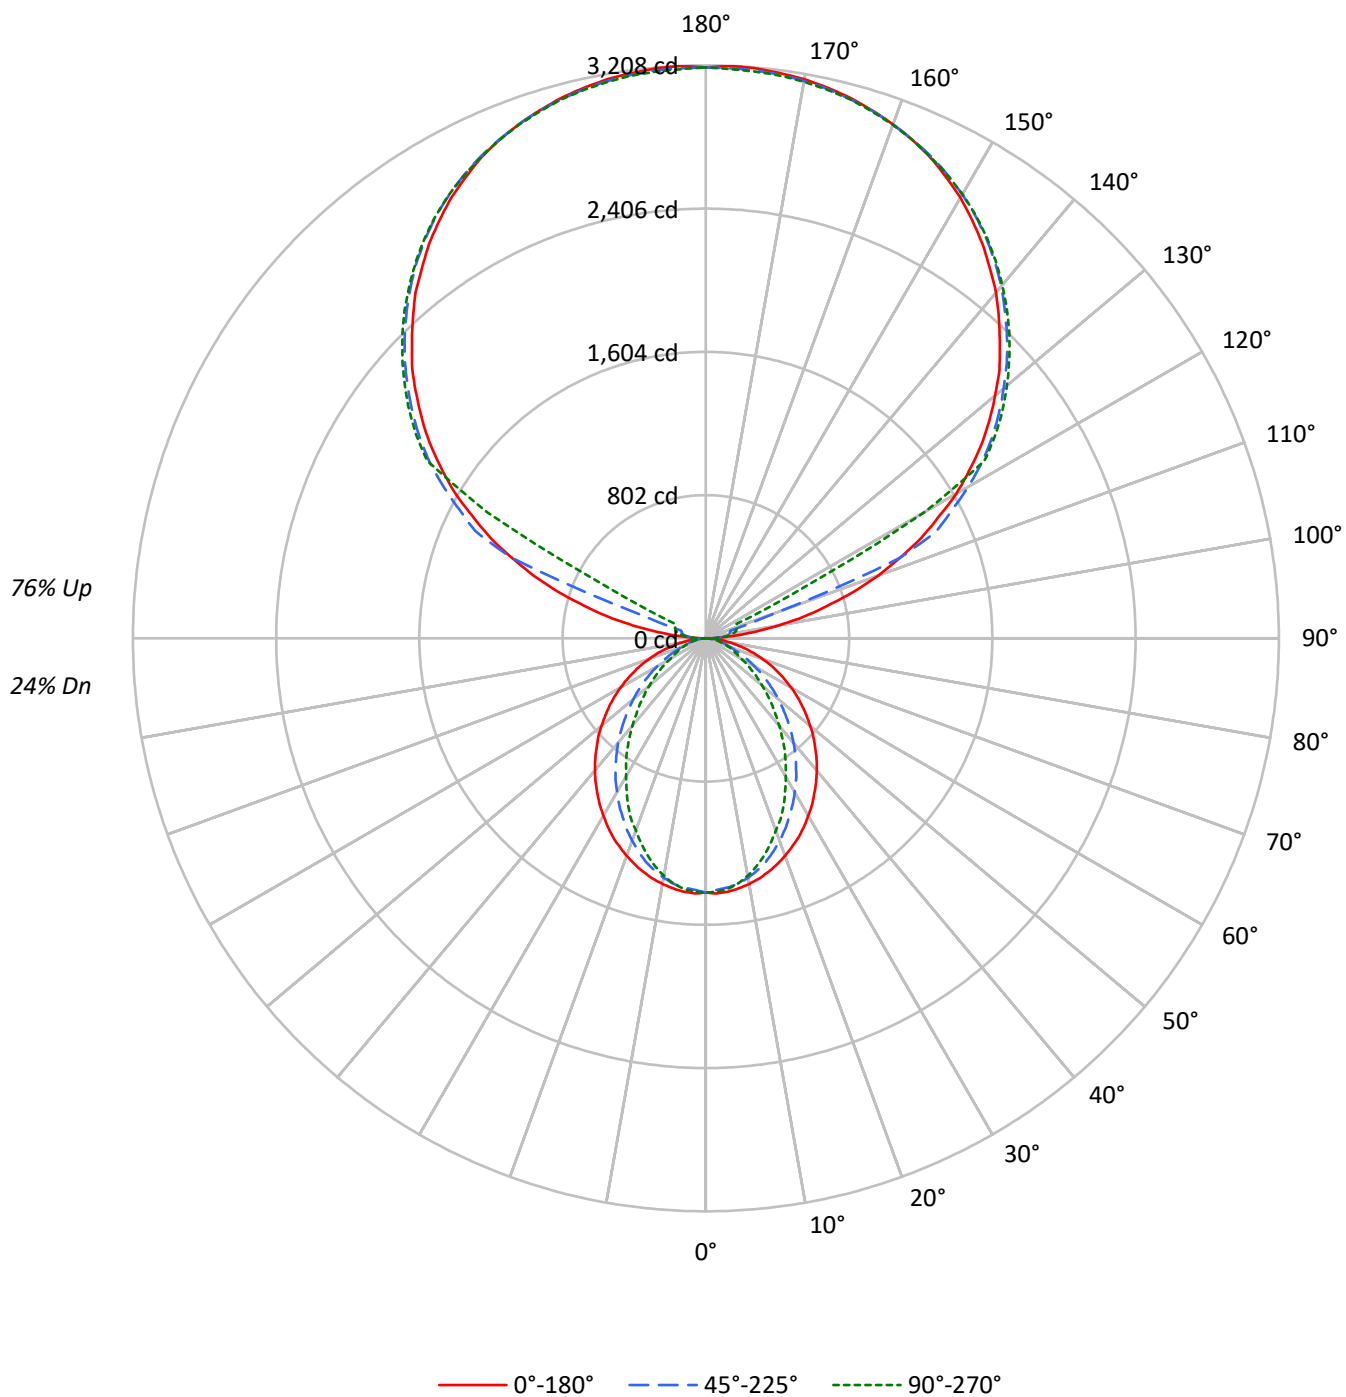

TEST NUMBER: P928846

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	32	32	32
1	92	88	84	81	82	78	75	73	60	58	57	44	43	42	29	28	27
2	84	77	71	67	75	69	64	60	53	50	47	39	37	35	25	24	23
3	77	68	61	56	68	61	55	50	47	43	40	34	32	30	23	21	20
4	70	60	53	47	62	54	48	43	42	38	34	31	28	26	20	19	18
5	64	53	46	40	57	48	41	37	37	33	29	28	25	22	19	17	15
6	59	48	40	35	53	43	36	32	34	29	26	25	22	20	17	15	14
7	55	43	36	30	49	39	32	28	30	26	22	23	20	17	15	14	12
8	51	39	32	27	45	35	29	24	28	23	20	21	18	15	14	12	11
9	47	36	28	24	42	32	26	22	25	21	18	19	16	14	13	11	10
10	44	32	26	21	39	29	23	19	23	19	16	18	15	12	12	10	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1058	1058	1058
5°	1060	1042	1048
10°	1050	1021	1014
15°	1035	988	962
20°	1016	941	897
25°	997	889	834
30°	971	836	755
35°	945	778	686
40°	919	719	606
45°	888	653	534
50°	857	586	463
55°	824	515	395
60°	787	441	325
65°	743	365	293
70°	690	295	265
75°	624	260	241
80°	528	218	209
85°	369	147	158

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1640 cd/sqm

TEST NUMBER: P928846

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US935-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.4	1.1
10°-20°	366.2	3.0
20°-30°	514.2	4.2
30°-40°	560.5	4.6
40°-50°	515.1	4.2
50°-60°	404.5	3.3
60°-70°	263.3	2.1
70°-80°	135.6	1.1
80°-90°	40.2	0.3
90°-100°	105.4	0.9
100°-110°	392.9	3.2
110°-120°	1042.0	8.5
120°-130°	1728.3	14.0
130°-140°	1835.9	14.9
140°-150°	1706.2	13.9
150°-160°	1371.8	11.1
160°-170°	883.9	7.2
170°-180°	304.2	2.5
0°-30°	1013.8	8.2
0°-40°	1574.2	12.8
0°-60°	2493.9	20.3
0°-90°	2933.0	23.8
90°-120°	1540.3	12.5
90°-150°	6810.7	55.4
90°-180°	9371.0	76.2
0°-180°	12303.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1423	1423	1423	1423	1423	
5°	1423	1417	1400	1412	1408	135
15°	1354	1340	1296	1271	1259	382
25°	1229	1188	1103	1050	1030	565
35°	1059	993	880	799	770	663
45°	866	779	644	553	522	668
55°	658	558	419	341	317	588
65°	444	340	224	180	176	441
75°	237	147	103	94	93	251
85°	55	28	24	24	24	64
90°	2	28	46	58	62	11
95°	150	74	90	102	99	178
105°	703	773	141	166	176	751
115°	1330	1369	1427	356	190	1309
125°	1880	1910	1954	1971	1978	1677
135°	2327	2364	2384	2408	2403	1797
145°	2699	2697	2736	2752	2741	1688
155°	2972	2951	2979	2993	2974	1370
165°	3132	3118	3125	3141	3125	885
175°	3203	3187	3192	3208	3185	305
180°	3196	3196	3196	3196	3196	

TEST NUMBER: P928846

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1423.4	1423.4	1423.4	1423.4	1423.4
2.5°	1429.9	1423.4	1409.2	1422.2	1419.5
5°	1423.4	1416.9	1400.2	1411.8	1408.0
7.5°	1411.8	1404.1	1386.1	1391.1	1384.7
10°	1396.4	1387.3	1361.6	1357.6	1350.0
12.5°	1377.1	1365.5	1330.6	1322.9	1308.7
15°	1353.8	1339.6	1295.9	1271.4	1258.6
17.5°	1326.8	1306.1	1252.0	1223.7	1203.1
20°	1295.9	1270.1	1205.7	1173.5	1145.1
22.5°	1262.4	1232.8	1158.0	1114.2	1095.0
25°	1228.9	1187.7	1102.6	1049.9	1030.4
27.5°	1189.0	1145.1	1051.1	990.6	960.9
30°	1146.5	1097.4	994.4	928.8	894.0
32.5°	1105.3	1045.9	940.4	863.1	830.8
35°	1058.9	993.2	879.9	798.7	770.3
37.5°	1013.8	942.9	823.1	734.2	702.1
40°	966.1	888.9	763.9	672.4	638.9
42.5°	917.1	834.7	704.6	609.2	577.1
45°	865.6	779.3	644.1	552.6	521.7
47.5°	816.7	725.3	586.2	494.6	466.3
50°	762.6	671.1	529.4	440.5	413.5
52.5°	709.7	613.1	475.4	390.3	365.8
55°	658.2	557.8	418.6	341.4	316.9
57.5°	605.5	502.4	368.4	296.3	275.7
60°	551.3	448.2	315.6	249.9	229.4
62.5°	498.6	395.5	270.4	208.7	198.5
65°	444.4	340.0	224.1	180.4	176.4
67.5°	393.0	288.5	180.4	158.4	154.5
70°	338.8	238.3	149.4	136.6	131.3
72.5°	287.3	191.9	124.9	114.7	112.1
75°	236.9	146.8	103.1	94.0	92.8
77.5°	186.8	104.3	81.2	76.0	73.4
80°	140.3	74.7	61.7	56.7	56.7
82.5°	97.9	50.3	42.5	39.9	39.9
85°	55.4	28.3	24.5	24.5	24.5
87.5°	20.7	10.2	10.2	9.0	9.0
90°	2.2	27.7	46.1	57.9	62.3
92.5°	57.9	48.6	55.4	60.2	62.3
95°	150.2	73.9	90.1	101.9	99.4
97.5°	270.5	81.0	117.8	124.9	127.2
100°	409.5	92.6	131.8	150.2	154.9
102.5°	561.9	557.5	136.5	161.8	168.9
105°	703.1	772.6	141.2	166.4	175.8
107.5°	867.4	925.0	145.9	171.1	180.5
110°	1024.7	1073.1	404.8	173.6	182.6

TEST NUMBER: P928846

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1172.8	1214.2	1174.9	178.0	185.1
115°	1329.8	1369.1	1427.1	356.2	189.8
117.5°	1466.4	1512.5	1552.0	1221.1	615.2
120°	1619.0	1653.6	1695.4	1723.1	1410.8
122.5°	1748.4	1785.5	1831.9	1845.6	1848.1
125°	1880.3	1910.5	1954.4	1970.6	1977.5
127.5°	2000.5	2032.9	2067.8	2090.9	2093.1
130°	2113.9	2151.0	2176.3	2201.8	2199.7
132.5°	2229.6	2259.8	2285.1	2305.9	2303.8
135°	2326.9	2363.9	2384.5	2407.9	2403.1
137.5°	2428.5	2456.2	2479.5	2502.6	2495.7
140°	2527.9	2546.5	2571.8	2592.6	2581.1
142.5°	2611.3	2627.5	2657.5	2675.9	2664.4
145°	2699.2	2696.7	2736.0	2752.3	2740.7
147.5°	2775.3	2768.5	2807.7	2819.3	2810.2
150°	2849.5	2833.3	2870.3	2884.1	2872.6
152.5°	2911.8	2893.4	2928.0	2942.0	2925.9
155°	2972.0	2951.3	2979.1	2992.8	2974.4
157.5°	3020.6	3002.1	3023.1	3039.2	3020.6
160°	3062.3	3048.3	3062.3	3076.0	3059.8
162.5°	3099.1	3085.4	3096.9	3113.1	3092.3
165°	3131.5	3117.8	3124.7	3140.8	3124.7
167.5°	3157.0	3143.1	3150.2	3166.4	3145.6
170°	3178.0	3163.9	3168.6	3184.8	3163.9
172.5°	3191.6	3178.0	3182.6	3198.8	3178.0
175°	3203.2	3187.0	3191.6	3207.9	3184.8
177.5°	3207.9	3191.6	3194.1	3210.3	3189.5
180°	3196.4	3196.4	3196.4	3196.4	3196.4

TEST NUMBER: P928846

CATALOG NUMBER: DFN2DIP-HX4F0-040D110US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.18	4.84	5.34	5.98	7.58	0.16	0.81	1.32	1.95	3.56
	3H	5.85	6.43	7.01	7.58	9.20	1.33	1.92	2.50	3.07	4.69
	4H	6.45	7.01	7.62	8.15	9.78	1.78	2.33	2.95	3.48	5.11
	6H	6.86	7.37	8.04	8.53	10.16	2.09	2.60	3.27	3.75	5.39
	8H	6.98	7.47	8.17	8.64	10.26	2.18	2.66	3.36	3.83	5.45
	12H	7.04	7.50	8.23	8.66	10.31	2.22	2.68	3.40	3.84	5.48
4H	2H	4.18	4.74	5.36	5.89	7.51	0.73	1.29	1.91	2.44	4.06
	3H	5.99	6.46	7.18	7.63	9.27	2.07	2.53	3.25	3.70	5.34
	4H	6.68	7.11	7.87	8.27	9.92	2.61	3.04	3.80	4.20	5.85
	6H	7.19	7.55	8.38	8.74	10.38	3.02	3.38	4.21	4.57	6.21
	8H	7.36	7.70	8.55	8.88	10.54	3.15	3.49	4.34	4.66	6.32
	12H	7.45	7.76	8.65	8.94	10.61	3.21	3.51	4.41	4.70	6.37
8H	4H	6.64	6.98	7.83	8.15	9.81	2.88	3.22	4.07	4.39	6.05
	6H	7.20	7.48	8.40	8.70	10.35	3.39	3.67	4.60	4.89	6.55
	8H	7.41	7.66	8.63	8.85	10.53	3.58	3.83	4.80	5.02	6.70
	12H	7.55	7.76	8.76	8.95	10.66	3.70	3.91	4.91	5.10	6.81
12H	4H	6.58	6.89	7.78	8.08	9.74	2.87	3.18	4.08	4.37	6.03
	6H	7.17	7.41	8.38	8.61	10.29	3.44	3.68	4.65	4.88	6.56
	8H	7.39	7.60	8.60	8.79	10.50	3.64	3.86	4.86	5.05	6.76