

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P929080

Luminaire Tested: DFN2DIP-HX4F0-110D070US935-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P929080
REPORT IS A COMBINATION OF REPORTS P900887 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-110D070US935-FLLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15343.0 lumens
Efficiency: N/A
Efficacy: 93.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 164.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P929080

CATALOG NUMBER: DFN2DIP-HX4F0-110D070US935-FLLONL

Luminous Intensity Polar Plot

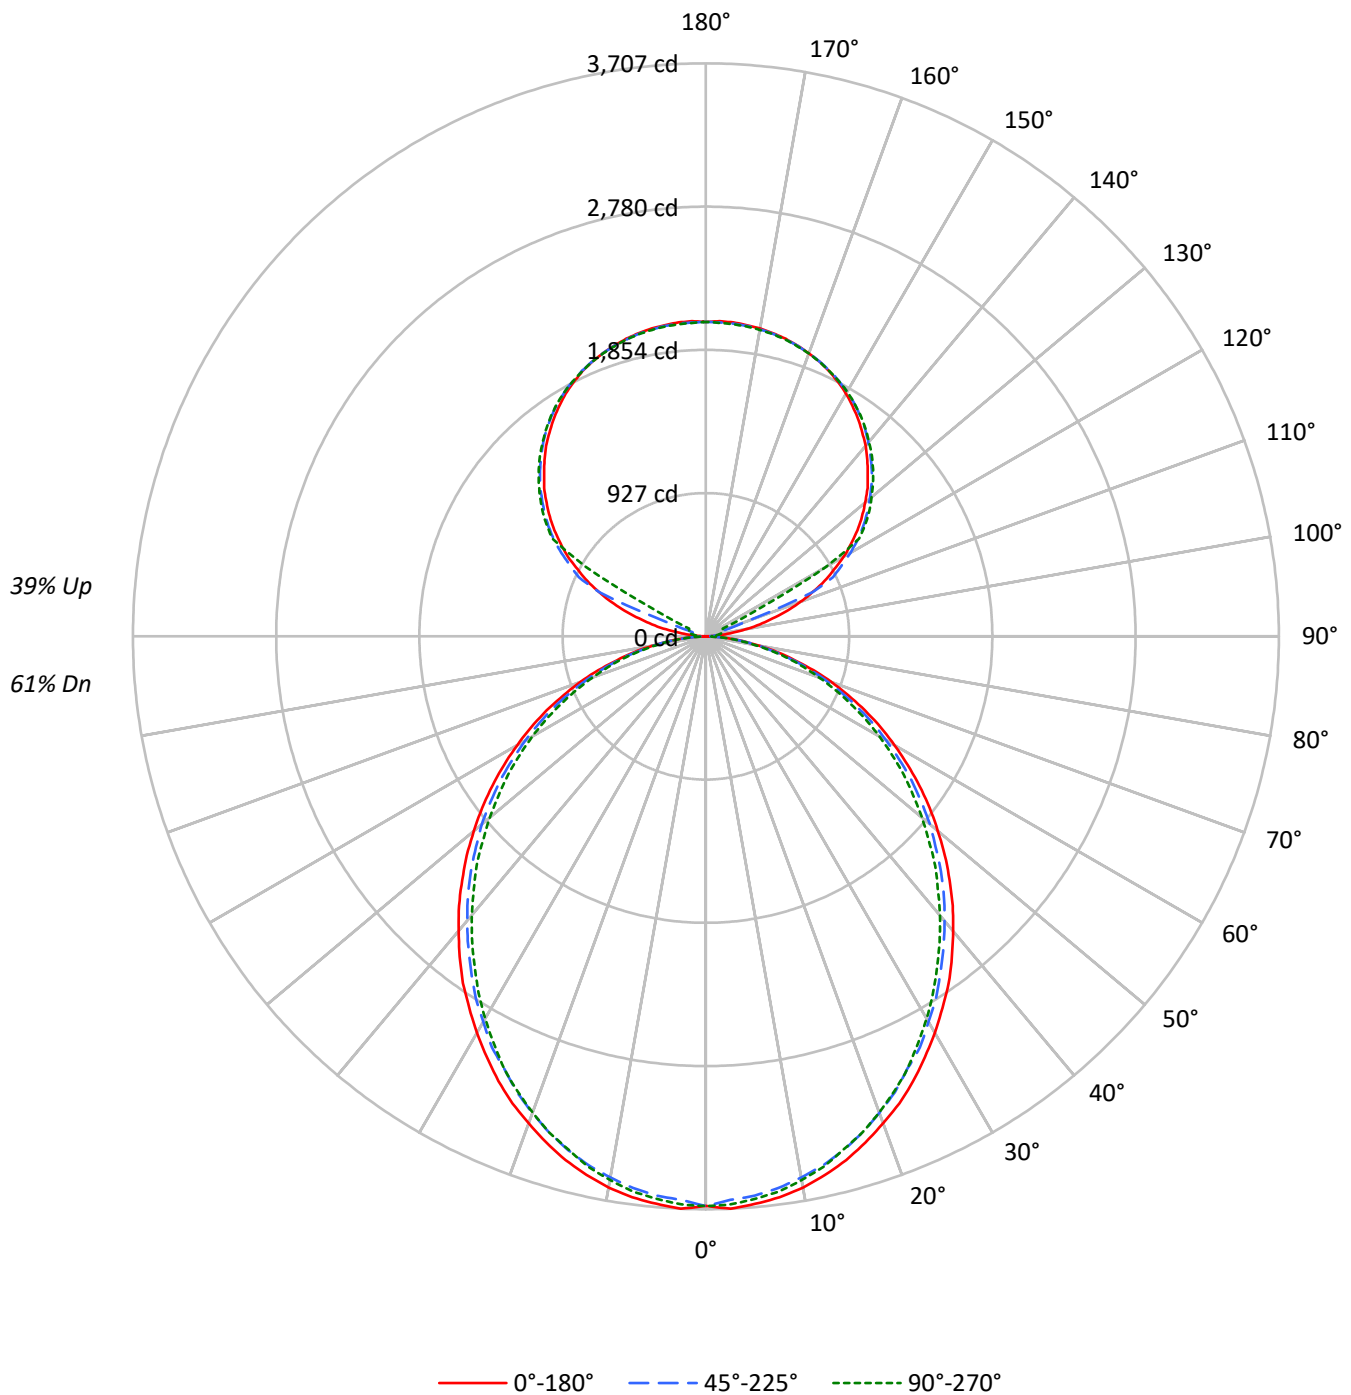

TEST NUMBER: P929080

CATALOG NUMBER: DFN2DIP-HX4F0-110D070US935-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	90	90	90	77	77	77	66	66	66
1	100	96	92	88	94	90	86	83	79	76	74	68	66	65	59	57	56
2	91	84	77	72	85	79	73	68	69	65	61	60	57	54	52	49	47
3	83	74	66	60	78	69	63	57	61	56	51	53	49	46	46	43	40
4	76	65	57	51	71	61	54	49	54	48	44	47	43	39	41	38	35
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30
6	65	52	44	38	60	49	42	36	44	38	33	38	34	30	34	30	27
7	60	47	39	33	56	45	37	32	40	34	29	35	30	26	31	27	24
8	56	43	35	30	52	41	33	28	36	30	26	32	27	24	28	24	21
9	52	39	32	27	48	37	30	25	33	27	23	30	25	21	26	22	19
10	48	36	29	24	45	34	28	23	31	25	21	27	23	19	24	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2740	2740	2740
5°	2745	2702	2720
10°	2723	2666	2684
15°	2683	2623	2626
20°	2629	2562	2568
25°	2575	2489	2500
30°	2508	2422	2413
35°	2445	2342	2322
40°	2366	2261	2234
45°	2288	2181	2145
50°	2203	2096	2042
55°	2113	1998	1948
60°	2012	1881	1839
65°	1902	1761	1711
70°	1762	1614	1573
75°	1567	1438	1446
80°	1333	1215	1203
85°	968	828	800

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2288 cd/sqm

TEST NUMBER: P929080

CATALOG NUMBER: DFN2DIP-HX4F0-110D070US935-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	346.9	2.3
10°-20°	975.9	6.4
20°-30°	1434.2	9.3
30°-40°	1665.7	10.9
40°-50°	1663.7	10.8
50°-60°	1450.7	9.5
60°-70°	1072.4	7.0
70°-80°	606.7	4.0
80°-90°	163.7	1.1
90°-100°	67.1	0.4
100°-110°	250.0	1.6
110°-120°	663.1	4.3
120°-130°	1099.8	7.2
130°-140°	1168.3	7.6
140°-150°	1085.8	7.1
150°-160°	872.9	5.7
160°-170°	562.5	3.7
170°-180°	193.6	1.3
0°-30°	2757.0	18.0
0°-40°	4422.7	28.8
0°-60°	7537.0	49.1
0°-90°	9379.9	61.1
90°-120°	980.3	6.4
90°-150°	4334.1	28.2
90°-180°	5963.0	38.9
0°-180°	15343.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3685	3685	3685	3685	3685	
5°	3685	3671	3632	3660	3654	350
15°	3508	3487	3441	3455	3438	988
25°	3175	3147	3087	3094	3087	1461
35°	2739	2704	2647	2626	2608	1711
45°	2229	2204	2151	2112	2098	1720
55°	1687	1666	1623	1580	1563	1508
65°	1138	1116	1081	1049	1031	1125
75°	595	588	570	549	556	635
85°	145	142	138	127	124	162
90°	1	18	29	37	40	14
95°	96	47	57	65	63	113
105°	448	492	90	106	112	478
115°	846	871	908	227	121	833
125°	1196	1216	1244	1254	1258	1067
135°	1481	1504	1517	1532	1529	1144
145°	1718	1716	1741	1751	1744	1074
155°	1891	1878	1896	1904	1893	872
165°	1993	1984	1988	1999	1988	563
175°	2038	2028	2031	2041	2027	194
180°	2034	2034	2034	2034	2034	

TEST NUMBER: P929080

CATALOG NUMBER: DFN2DIP-HX4F0-110D070US935-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3685.3	3685.3	3685.3	3685.3	3685.3
2.5°	3706.6	3689.0	3649.9	3685.3	3678.5
5°	3685.3	3671.3	3632.2	3660.4	3653.7
7.5°	3660.4	3639.4	3600.3	3628.9	3621.7
10°	3621.7	3596.8	3554.4	3582.5	3572.0
12.5°	3568.3	3547.2	3504.8	3522.4	3515.3
15°	3508.1	3487.0	3440.8	3455.1	3437.5
17.5°	3433.7	3412.7	3366.4	3384.1	3366.4
20°	3352.1	3331.0	3281.4	3291.9	3278.1
22.5°	3270.9	3238.9	3192.7	3192.7	3185.5
25°	3175.0	3146.9	3086.7	3093.5	3086.7
27.5°	3068.6	3043.8	2997.9	2987.4	2969.8
30°	2962.6	2934.0	2881.0	2870.5	2856.2
32.5°	2849.0	2828.0	2771.2	2749.8	2735.5
35°	2739.3	2704.0	2647.1	2625.7	2608.1
37.5°	2615.2	2583.3	2526.5	2501.6	2484.0
40°	2487.8	2459.2	2402.4	2370.8	2356.6
42.5°	2363.7	2335.1	2278.7	2243.0	2222.0
45°	2229.1	2204.2	2150.9	2112.2	2097.9
47.5°	2097.9	2073.1	2016.3	1977.2	1956.1
50°	1959.5	1941.9	1892.2	1842.6	1825.0
52.5°	1825.0	1800.1	1754.3	1715.1	1690.3
55°	1687.0	1665.5	1623.1	1580.5	1562.9
57.5°	1548.6	1530.9	1484.7	1442.2	1427.9
60°	1410.2	1396.4	1346.7	1307.6	1297.1
62.5°	1275.7	1250.9	1215.5	1180.2	1165.9
65°	1137.6	1116.2	1080.9	1049.0	1031.3
67.5°	995.9	977.9	946.3	921.5	907.2
70°	864.7	850.4	818.5	793.7	779.7
72.5°	730.1	715.8	698.2	673.4	662.8
75°	595.1	588.4	570.3	549.3	556.5
77.5°	474.8	460.5	453.4	442.9	432.4
80°	354.6	350.8	343.6	333.1	326.0
82.5°	241.0	241.0	237.6	223.3	223.3
85°	145.2	141.7	138.4	127.4	124.1
87.5°	63.9	56.7	49.6	39.1	35.3
90°	1.4	17.7	29.4	36.9	39.7
92.5°	36.9	30.9	35.3	38.3	39.7
95°	95.6	47.0	57.3	64.8	63.3
97.5°	172.1	51.6	75.0	79.6	80.9
100°	260.6	58.9	83.9	95.6	98.6
102.5°	357.6	354.8	86.9	103.0	107.5
105°	447.5	491.6	89.8	105.9	111.8
107.5°	551.9	588.7	92.8	108.9	114.9
110°	652.1	682.9	257.6	110.5	116.2

TEST NUMBER: P929080

CATALOG NUMBER: DFN2DIP-HX4F0-110D070US935-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	746.3	772.7	747.7	113.2	117.8
115°	846.3	871.2	908.1	226.7	120.8
117.5°	933.2	962.5	987.7	777.1	391.5
120°	1030.3	1052.3	1078.9	1096.6	897.9
122.5°	1112.6	1136.2	1165.8	1174.5	1176.0
125°	1196.5	1215.7	1243.7	1254.0	1258.4
127.5°	1273.1	1293.7	1315.9	1330.6	1332.0
130°	1345.2	1368.8	1384.9	1401.2	1399.8
132.5°	1418.8	1438.0	1454.1	1467.4	1466.0
135°	1480.7	1504.3	1517.4	1532.2	1529.3
137.5°	1545.3	1563.1	1577.9	1592.6	1588.2
140°	1608.6	1620.5	1636.6	1649.8	1642.5
142.5°	1661.7	1672.1	1691.1	1702.8	1695.5
145°	1717.7	1716.1	1741.1	1751.4	1744.1
147.5°	1766.1	1761.8	1786.7	1794.1	1788.3
150°	1813.3	1803.0	1826.6	1835.3	1828.0
152.5°	1853.0	1841.2	1863.3	1872.2	1861.9
155°	1891.3	1878.1	1895.7	1904.5	1892.8
157.5°	1922.2	1910.5	1923.7	1934.1	1922.2
160°	1948.8	1939.8	1948.8	1957.5	1947.2
162.5°	1972.2	1963.4	1970.7	1981.1	1967.8
165°	1992.8	1984.1	1988.4	1998.7	1988.4
167.5°	2009.1	2000.1	2004.7	2015.0	2001.7
170°	2022.3	2013.4	2016.4	2026.7	2013.4
172.5°	2031.1	2022.3	2025.3	2035.6	2022.3
175°	2038.4	2028.1	2031.1	2041.3	2026.7
177.5°	2041.3	2031.1	2032.6	2043.0	2029.6
180°	2034.0	2034.0	2034.0	2034.0	2034.0

TEST NUMBER: P929080

CATALOG NUMBER: DFN2DIP-HX4F0-110D070US935-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.74	12.71	12.60	13.59	14.69	11.31	12.28	12.17	13.16	14.26
	3H	13.41	14.28	14.28	15.17	16.30	12.94	13.81	13.81	14.70	15.83
	4H	14.01	14.83	14.89	15.72	16.86	13.53	14.36	14.42	15.25	16.39
	6H	14.41	15.17	15.31	16.07	17.22	13.94	14.70	14.83	15.60	16.75
	8H	14.52	15.24	15.42	16.16	17.31	14.05	14.77	14.95	15.69	16.84
	12H	14.57	15.26	15.48	16.17	17.35	14.09	14.78	15.00	15.69	16.87
4H	2H	12.22	13.04	13.11	13.94	15.07	11.87	12.70	12.76	13.59	14.73
	3H	14.10	14.78	15.00	15.71	16.86	13.70	14.39	14.60	15.32	16.47
	4H	14.82	15.44	15.73	16.36	17.54	14.41	15.04	15.32	15.96	17.14
	6H	15.34	15.88	16.26	16.82	18.00	14.93	15.47	15.85	16.41	17.60
	8H	15.49	16.00	16.42	16.94	18.13	15.08	15.58	16.01	16.52	17.72
	12H	15.57	16.03	16.52	16.98	18.18	15.15	15.60	16.09	16.56	17.76
8H	4H	15.02	15.53	15.95	16.47	17.66	14.66	15.17	15.59	16.11	17.30
	6H	15.66	16.08	16.61	17.06	18.25	15.30	15.72	16.25	16.70	17.89
	8H	15.88	16.25	16.85	17.22	18.43	15.51	15.88	16.48	16.85	18.07
	12H	16.02	16.35	16.99	17.31	18.57	15.63	15.96	16.60	16.92	18.18
12H	4H	15.01	15.47	15.96	16.43	17.63	14.66	15.12	15.61	16.07	17.27
	6H	15.69	16.06	16.65	17.03	18.24	15.34	15.71	16.30	16.68	17.89
	8H	15.94	16.26	16.91	17.23	18.49	15.58	15.91	16.55	16.87	18.13