

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P929092

Luminaire Tested: DFN2DIP-HX4F0-110D100US935-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P929092
REPORT IS A COMBINATION OF REPORTS P900941 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-110D100US935-FLLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 17900.2 lumens
Efficiency: N/A
Efficacy: 95.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 188.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9967
Total Harmonic Distortion (THDi): 0.063
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P929092
CATALOG NUMBER: DFN2DIP-HX4F0-110D100US935-FLLONL

Luminous Intensity Polar Plot

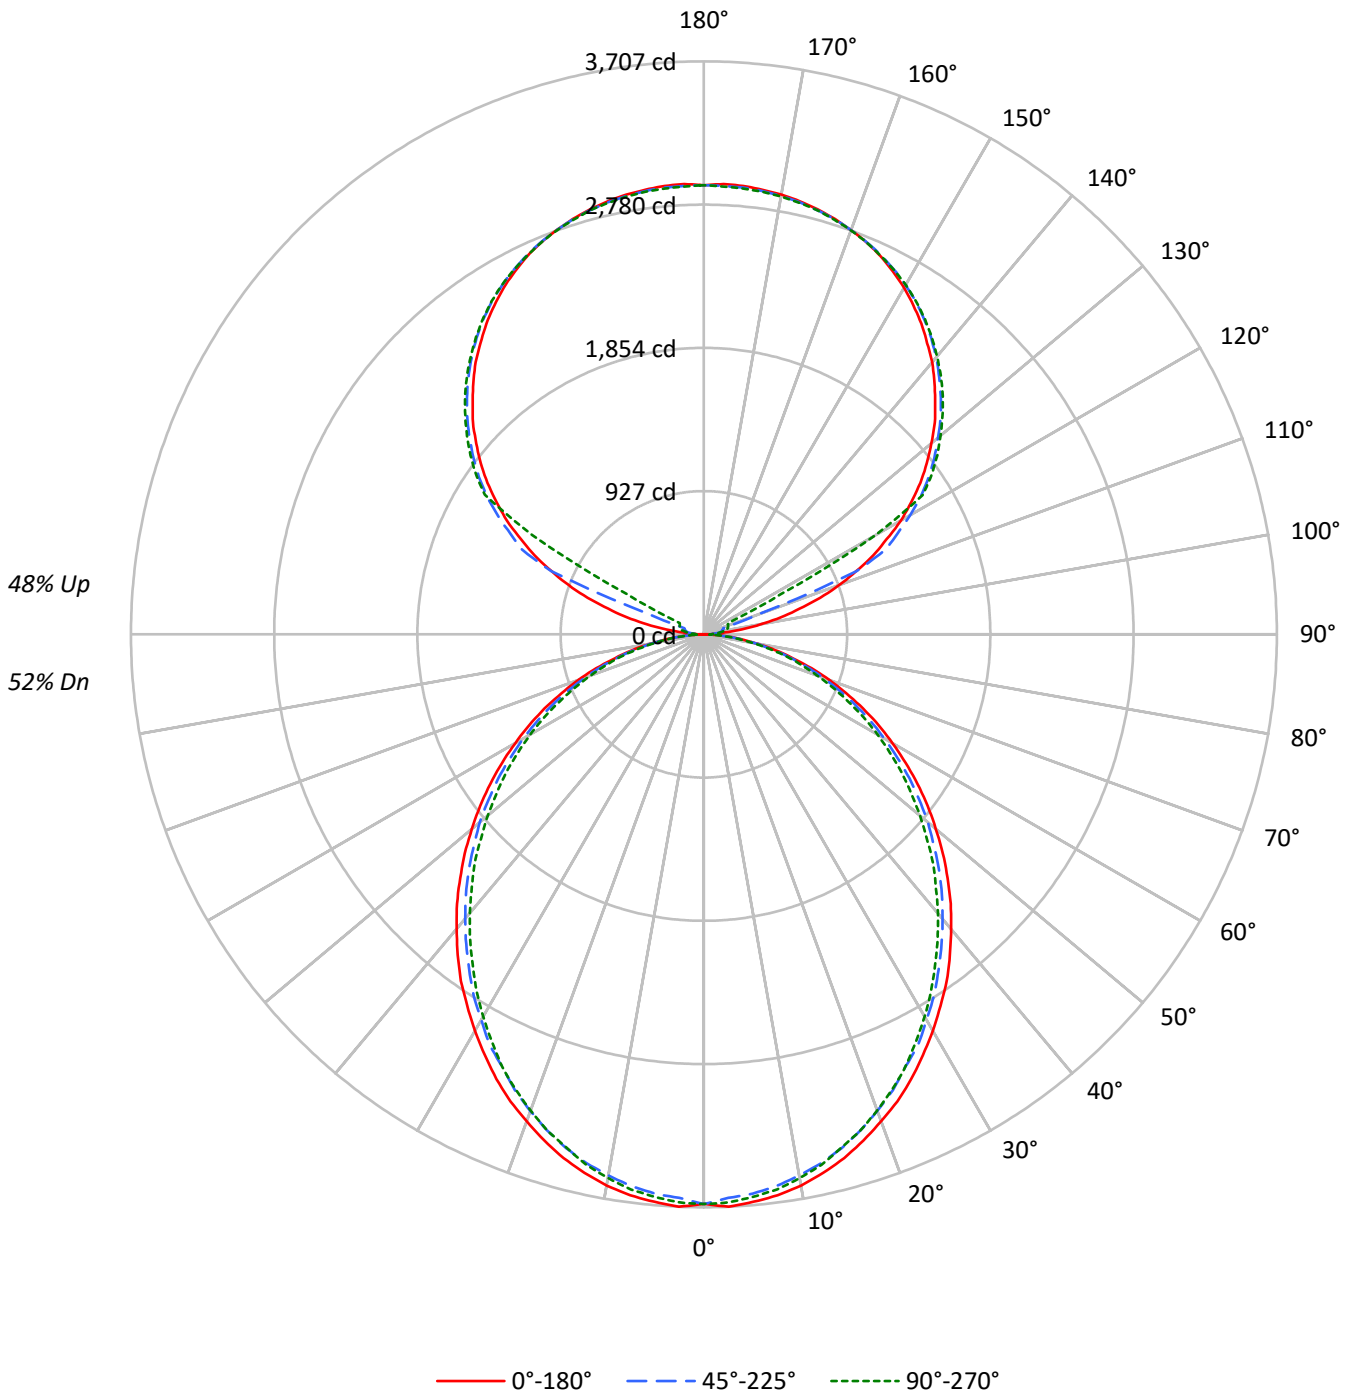



TEST NUMBER: P929092
 CATALOG NUMBER: DFN2DIP-HX4F0-110D100US935-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	58	58	58	52	52	52	52
1	98	94	90	87	91	87	84	81	74	72	70	62	61	59	52	50	49	44	44	44	44
2	90	82	76	71	83	76	71	66	65	61	58	55	52	49	45	43	42	37	37	37	37
3	82	72	65	59	75	67	61	55	57	53	48	49	45	42	40	38	35	31	31	31	31
4	75	64	56	50	69	59	52	47	51	46	41	43	39	36	36	33	30	27	27	27	27
5	69	57	49	43	63	53	46	40	46	40	36	39	34	31	32	29	27	23	23	23	23
6	63	51	43	37	58	48	40	35	41	35	31	35	31	27	29	26	23	21	21	21	21
7	58	46	38	33	54	43	36	31	37	32	27	32	27	24	27	23	21	18	18	18	18
8	54	42	34	29	50	39	32	27	34	28	24	29	25	22	25	21	19	16	16	16	16
9	51	38	31	26	47	36	29	24	31	26	22	27	22	19	23	19	17	15	15	15	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	13	13	13	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2740	2740	2740
5°	2745	2702	2720
10°	2723	2666	2684
15°	2683	2623	2626
20°	2629	2562	2568
25°	2575	2489	2500
30°	2508	2422	2413
35°	2445	2342	2322
40°	2366	2261	2234
45°	2288	2181	2145
50°	2203	2096	2042
55°	2113	1998	1948
60°	2012	1881	1839
65°	1902	1761	1711
70°	1762	1614	1573
75°	1567	1438	1446
80°	1333	1215	1203
85°	968	828	800

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2288 cd/sqm



TEST NUMBER: P929092

CATALOG NUMBER: DFN2DIP-HX4F0-110D100US935-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	346.9	1.9
10°-20°	975.9	5.5
20°-30°	1434.2	8.0
30°-40°	1665.7	9.3
40°-50°	1663.7	9.3
50°-60°	1450.7	8.1
60°-70°	1072.4	6.0
70°-80°	606.7	3.4
80°-90°	165.2	0.9
90°-100°	95.8	0.5
100°-110°	357.2	2.0
110°-120°	947.3	5.3
120°-130°	1571.2	8.8
130°-140°	1669.0	9.3
140°-150°	1551.1	8.7
150°-160°	1247.1	7.0
160°-170°	803.6	4.5
170°-180°	276.6	1.5
0°-30°	2757.0	15.4
0°-40°	4422.7	24.7
0°-60°	7537.0	42.1
0°-90°	9381.4	52.4
90°-120°	1400.3	7.8
90°-150°	6191.6	34.6
90°-180°	8519.0	47.6
0°-180°	17900.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3685	3685	3685	3685	3685	
5°	3685	3671	3632	3660	3654	350
15°	3508	3487	3441	3455	3438	988
25°	3175	3147	3087	3094	3087	1461
35°	2739	2704	2647	2626	2608	1711
45°	2229	2204	2151	2112	2098	1720
55°	1687	1666	1623	1580	1563	1508
65°	1138	1116	1081	1049	1031	1125
75°	595	588	570	549	556	635
85°	145	142	138	127	124	162
90°	2	25	42	53	57	17
95°	137	67	82	93	90	162
105°	639	702	128	151	160	683
115°	1209	1245	1297	324	172	1190
125°	1709	1737	1777	1792	1798	1525
135°	2115	2149	2168	2189	2185	1634
145°	2454	2452	2487	2502	2492	1535
155°	2702	2683	2708	2721	2704	1245
165°	2847	2834	2841	2855	2841	804
175°	2912	2897	2902	2916	2895	277
180°	2906	2906	2906	2906	2906	



TEST NUMBER: P929092

CATALOG NUMBER: DFN2DIP-HX4F0-110D100US935-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3685.3	3685.3	3685.3	3685.3	3685.3
2.5°	3706.6	3689.0	3649.9	3685.3	3678.5
5°	3685.3	3671.3	3632.2	3660.4	3653.7
7.5°	3660.4	3639.4	3600.3	3628.9	3621.7
10°	3621.7	3596.8	3554.4	3582.5	3572.0
12.5°	3568.3	3547.2	3504.8	3522.4	3515.3
15°	3508.1	3487.0	3440.8	3455.1	3437.5
17.5°	3433.7	3412.7	3366.4	3384.1	3366.4
20°	3352.1	3331.0	3281.4	3291.9	3278.1
22.5°	3270.9	3238.9	3192.7	3192.7	3185.5
25°	3175.0	3146.9	3086.7	3093.5	3086.7
27.5°	3068.6	3043.8	2997.9	2987.4	2969.8
30°	2962.6	2934.0	2881.0	2870.5	2856.2
32.5°	2849.0	2828.0	2771.2	2749.8	2735.5
35°	2739.3	2704.0	2647.1	2625.7	2608.1
37.5°	2615.2	2583.3	2526.5	2501.6	2484.0
40°	2487.8	2459.2	2402.4	2370.8	2356.6
42.5°	2363.7	2335.1	2278.7	2243.0	2222.0
45°	2229.1	2204.2	2150.9	2112.2	2097.9
47.5°	2097.9	2073.1	2016.3	1977.2	1956.1
50°	1959.5	1941.9	1892.2	1842.6	1825.0
52.5°	1825.0	1800.1	1754.3	1715.1	1690.3
55°	1687.0	1665.5	1623.1	1580.5	1562.9
57.5°	1548.6	1530.9	1484.7	1442.2	1427.9
60°	1410.2	1396.4	1346.7	1307.6	1297.1
62.5°	1275.7	1250.9	1215.5	1180.2	1165.9
65°	1137.6	1116.2	1080.9	1049.0	1031.3
67.5°	995.9	977.9	946.3	921.5	907.2
70°	864.7	850.4	818.5	793.7	779.7
72.5°	730.1	715.8	698.2	673.4	662.8
75°	595.1	588.4	570.3	549.3	556.5
77.5°	474.8	460.5	453.4	442.9	432.4
80°	354.6	350.8	343.6	333.1	326.0
82.5°	241.0	241.0	237.6	223.3	223.3
85°	145.2	141.7	138.4	127.4	124.1
87.5°	63.9	56.7	49.6	39.1	35.3
90°	2.0	25.2	41.9	52.7	56.7
92.5°	52.7	44.2	50.5	54.7	56.7
95°	136.6	67.2	81.9	92.6	90.4
97.5°	245.9	73.6	107.1	113.6	115.6
100°	372.3	84.1	119.9	136.6	140.9
102.5°	510.8	506.9	124.1	147.1	153.5
105°	639.2	702.3	128.4	151.3	159.8
107.5°	788.5	840.9	132.6	155.6	164.0
110°	931.5	975.5	368.0	157.8	166.0



TEST NUMBER: P929092

CATALOG NUMBER: DFN2DIP-HX4F0-110D100US935-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1066.1	1103.8	1068.2	161.8	168.3
115°	1208.9	1244.7	1297.4	323.8	172.5
117.5°	1333.0	1375.0	1410.9	1110.1	559.3
120°	1471.9	1503.3	1541.3	1566.5	1282.6
122.5°	1589.5	1623.2	1665.3	1677.8	1680.1
125°	1709.3	1736.8	1776.8	1791.5	1797.7
127.5°	1818.7	1848.1	1879.8	1900.8	1902.8
130°	1921.8	1955.5	1978.5	2001.7	1999.7
132.5°	2026.9	2054.3	2077.3	2096.3	2094.3
135°	2115.3	2149.0	2167.7	2188.9	2184.7
137.5°	2207.7	2232.9	2254.1	2275.1	2268.8
140°	2298.0	2315.1	2338.0	2357.0	2346.5
142.5°	2373.9	2388.7	2415.9	2432.6	2422.2
145°	2453.8	2451.6	2487.3	2502.1	2491.6
147.5°	2523.0	2516.8	2552.4	2562.9	2554.8
150°	2590.4	2575.7	2609.4	2621.9	2611.4
152.5°	2647.1	2630.4	2661.9	2674.5	2659.8
155°	2701.8	2683.0	2708.3	2720.8	2704.1
157.5°	2746.0	2729.3	2748.2	2762.9	2746.0
160°	2784.0	2771.2	2784.0	2796.4	2781.7
162.5°	2817.4	2804.9	2815.4	2830.1	2811.2
165°	2846.8	2834.3	2840.6	2855.3	2840.6
167.5°	2870.1	2857.3	2863.9	2878.6	2859.6
170°	2889.0	2876.3	2880.6	2895.3	2876.3
172.5°	2901.5	2889.0	2893.3	2908.0	2889.0
175°	2912.0	2897.3	2901.5	2916.3	2895.3
177.5°	2916.3	2901.5	2903.8	2918.5	2899.5
180°	2905.8	2905.8	2905.8	2905.8	2905.8



TEST NUMBER: P929092
 CATALOG NUMBER: DFN2DIP-HX4F0-110D100US935-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.00	11.88	11.93	12.83	14.07	10.56	11.45	11.50	12.40	13.64
	3H	12.66	13.45	13.61	14.41	15.67	12.19	12.98	13.13	13.94	15.20
	4H	13.25	14.00	14.21	14.96	16.23	12.77	13.52	13.74	14.49	15.76
	6H	13.65	14.34	14.62	15.31	16.59	13.17	13.86	14.15	14.84	16.12
	8H	13.75	14.41	14.73	15.40	16.68	13.28	13.94	14.26	14.93	16.21
	12H	13.80	14.43	14.79	15.41	16.72	13.32	13.95	14.31	14.93	16.24
4H	2H	11.46	12.21	12.43	13.18	14.45	11.12	11.87	12.08	12.83	14.10
	3H	13.33	13.96	14.31	14.95	16.23	12.94	13.56	13.91	14.56	15.84
	4H	14.05	14.62	15.03	15.61	16.91	13.64	14.21	14.63	15.20	16.51
	6H	14.56	15.06	15.56	16.07	17.37	14.15	14.65	15.15	15.66	16.96
	8H	14.71	15.17	15.71	16.18	17.50	14.30	14.76	15.30	15.77	17.09
	12H	14.79	15.20	15.81	16.23	17.55	14.37	14.78	15.38	15.80	17.13
8H	4H	14.24	14.70	15.24	15.71	17.03	13.88	14.34	14.88	15.35	16.67
	6H	14.88	15.26	15.90	16.31	17.62	14.52	14.90	15.54	15.94	17.26
	8H	15.10	15.44	16.13	16.47	17.81	14.73	15.07	15.76	16.10	17.44
	12H	15.23	15.53	16.27	16.56	17.94	14.85	15.14	15.88	16.17	17.55
12H	4H	14.23	14.65	15.25	15.67	16.99	13.88	14.30	14.90	15.32	16.64
	6H	14.91	15.24	15.94	16.28	17.62	14.56	14.89	15.59	15.93	17.26
	8H	15.15	15.45	16.19	16.48	17.86	14.80	15.09	15.83	16.12	17.50