

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P929114

Luminaire Tested: DFN2DIP-HX4F0-120D060US935-RLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P929114
REPORT IS A COMBINATION OF REPORTS P900872 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-120D060US935-RLLONL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13896.5 lumens
Efficiency: N/A
Efficacy: 81.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 170.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P929114

CATALOG NUMBER: DFN2DIP-HX4F0-120D060US935-RLLONL

Luminous Intensity Polar Plot

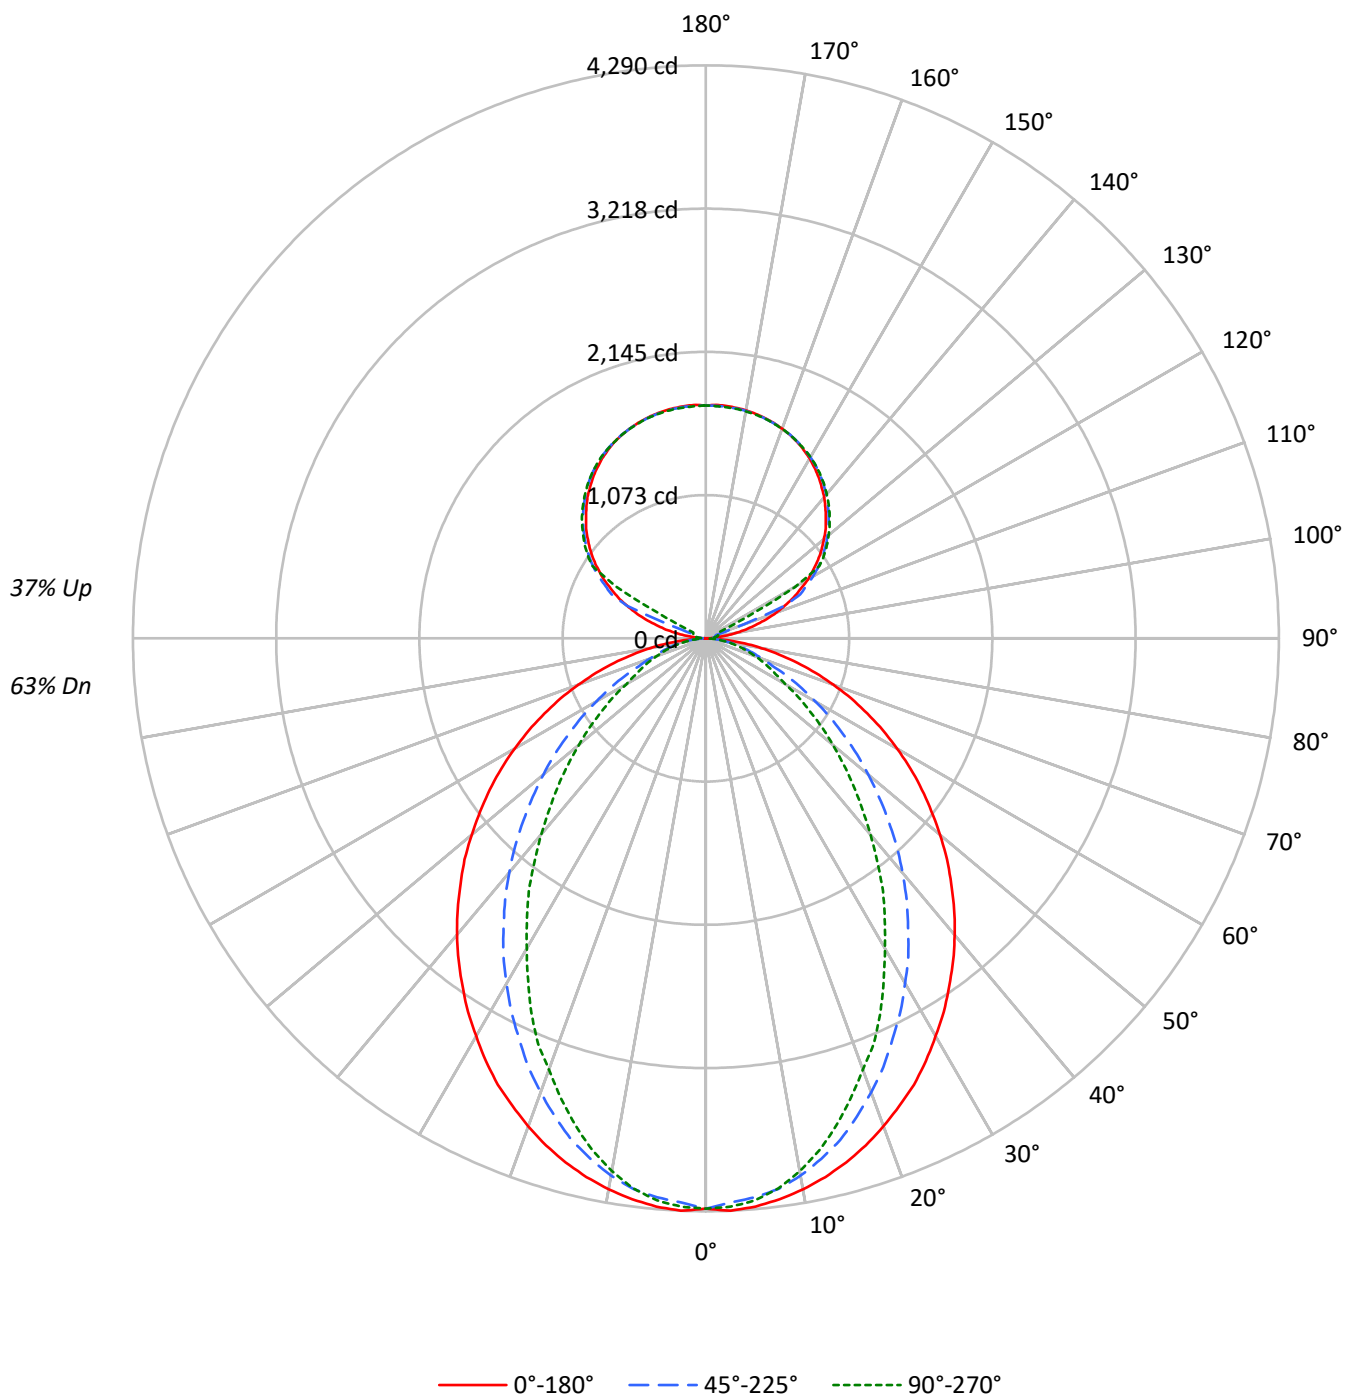

TEST NUMBER: P929114

CATALOG NUMBER: DFN2DIP-HX4F0-120D060US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68
1	101	97	93	90	95	91	88	85	80	78	76	71	69	67	61	60	59
2	93	86	80	75	87	81	75	71	71	67	64	63	60	57	55	52	51
3	85	76	69	63	80	72	65	60	63	58	54	56	52	49	49	46	44
4	78	68	60	54	73	64	57	52	57	51	47	50	46	43	44	41	38
5	72	61	53	47	67	57	50	45	51	45	41	46	41	37	40	37	34
6	67	55	47	41	62	52	45	39	46	41	36	41	37	33	37	33	30
7	62	50	42	36	58	47	40	35	42	36	32	38	33	30	34	30	27
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	24
9	54	42	34	29	51	40	33	28	36	30	26	32	27	24	29	25	22
10	50	38	31	26	47	37	30	25	33	28	24	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3175	3175	3175
5°	3180	3125	3145
10°	3149	3064	3043
15°	3106	2963	2885
20°	3049	2824	2691
25°	2991	2668	2503
30°	2912	2507	2266
35°	2835	2335	2057
40°	2757	2157	1817
45°	2666	1959	1600
50°	2572	1759	1388
55°	2473	1546	1185
60°	2360	1323	975
65°	2229	1095	878
70°	2071	884	795
75°	1872	780	724
80°	1583	655	628
85°	1107	439	473

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2666 cd/sqm

TEST NUMBER: P929114

CATALOG NUMBER: DFN2DIP-HX4F0-120D060US935-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	400.2	2.9
10°-20°	1098.7	7.9
20°-30°	1542.5	11.1
30°-40°	1681.4	12.1
40°-50°	1545.4	11.1
50°-60°	1213.7	8.7
60°-70°	790.0	5.7
70°-80°	406.7	2.9
80°-90°	106.9	0.8
90°-100°	57.5	0.4
100°-110°	214.3	1.5
110°-120°	568.4	4.1
120°-130°	942.7	6.8
130°-140°	1001.4	7.2
140°-150°	930.7	6.7
150°-160°	748.2	5.4
160°-170°	482.1	3.5
170°-180°	165.9	1.2
0°-30°	3041.3	21.9
0°-40°	4722.7	34.0
0°-60°	7481.8	53.8
0°-90°	8785.3	63.2
90°-120°	840.2	6.0
90°-150°	3714.9	26.7
90°-180°	5111.0	36.8
0°-180°	13896.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4270	4270	4270	4270	4270	
5°	4270	4251	4200	4235	4224	405
15°	4062	4019	3888	3814	3776	1144
25°	3687	3563	3308	3150	3091	1696
35°	3177	2980	2640	2396	2311	1988
45°	2597	2338	1932	1658	1565	2006
55°	1975	1673	1256	1024	951	1764
65°	1333	1020	672	541	529	1322
75°	711	440	309	282	278	752
85°	166	85	73	73	73	191
90°	1	15	25	32	34	13
95°	82	40	49	56	54	97
105°	384	421	77	91	96	410
115°	725	747	778	194	104	714
125°	1026	1042	1066	1075	1079	915
135°	1269	1289	1301	1313	1311	980
145°	1472	1471	1492	1501	1495	921
155°	1621	1610	1625	1632	1622	747
165°	1708	1701	1704	1713	1704	483
175°	1747	1738	1741	1750	1737	166
180°	1743	1743	1743	1743	1743	

TEST NUMBER: P929114

CATALOG NUMBER: DFN2DIP-HX4F0-120D060US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4270.2	4270.2	4270.2	4270.2	4270.2
2.5°	4289.5	4270.2	4227.6	4266.5	4258.7
5°	4270.2	4250.9	4200.5	4235.3	4223.9
7.5°	4235.3	4212.4	4158.3	4173.4	4154.2
10°	4189.0	4162.0	4084.8	4073.0	4050.1
12.5°	4131.2	4096.4	3991.8	3968.9	3926.2
15°	4061.5	4018.9	3887.7	3814.2	3775.7
17.5°	3980.3	3918.4	3756.0	3671.2	3609.3
20°	3887.7	3810.2	3617.1	3520.7	3435.4
22.5°	3787.2	3698.3	3474.0	3342.7	3285.0
25°	3686.8	3562.9	3307.9	3149.6	3091.4
27.5°	3567.0	3435.4	3153.3	2971.7	2882.7
30°	3439.5	3292.4	2983.2	2786.4	2681.8
32.5°	3315.7	3137.7	2821.2	2589.2	2492.4
35°	3176.7	2979.5	2639.6	2396.1	2310.8
37.5°	3041.4	2828.6	2469.4	2202.5	2106.2
40°	2898.3	2666.7	2291.6	2017.2	1916.8
42.5°	2751.5	2504.3	2114.0	1827.8	1731.5
45°	2596.9	2337.9	1932.3	1657.7	1565.0
47.5°	2450.1	2175.9	1758.5	1483.8	1399.0
50°	2287.8	2013.5	1588.4	1321.5	1240.7
52.5°	2129.2	1839.3	1426.0	1171.0	1097.6
55°	1974.6	1673.3	1255.9	1024.2	950.8
57.5°	1816.3	1507.2	1105.4	888.9	827.0
60°	1654.0	1344.8	946.7	749.9	688.0
62.5°	1495.7	1186.5	811.4	626.1	595.3
65°	1333.3	1020.1	672.4	541.2	529.3
67.5°	1178.8	865.5	541.2	475.2	463.7
70°	1016.4	715.1	448.2	409.6	394.0
72.5°	861.9	575.7	374.7	344.0	336.2
75°	710.9	440.3	309.2	282.1	278.4
77.5°	560.5	312.8	243.6	228.0	220.2
80°	421.1	224.3	185.3	170.1	170.1
82.5°	293.6	150.8	127.5	119.7	119.7
85°	166.1	84.9	73.4	73.4	73.4
87.5°	61.9	30.7	30.7	27.0	27.0
90°	1.2	15.2	25.1	31.6	34.0
92.5°	31.6	26.5	30.2	32.8	34.0
95°	82.0	40.3	49.2	55.6	54.2
97.5°	147.6	44.2	64.2	68.2	69.4
100°	223.3	50.5	71.9	82.0	84.5
102.5°	306.5	304.1	74.5	88.3	92.1
105°	383.5	421.4	77.0	90.7	95.9
107.5°	473.1	504.5	79.6	93.3	98.4
110°	559.0	585.3	220.8	94.7	99.6

TEST NUMBER: P929114

CATALOG NUMBER: DFN2DIP-HX4F0-120D060US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	639.6	662.3	640.8	97.0	101.0
115°	725.4	746.8	778.4	194.3	103.5
117.5°	799.8	825.0	846.5	666.1	335.5
120°	883.1	902.0	924.8	939.9	769.6
122.5°	953.6	973.9	999.2	1006.7	1008.1
125°	1025.6	1042.1	1066.0	1074.9	1078.6
127.5°	1091.2	1108.9	1127.9	1140.5	1141.7
130°	1153.1	1173.3	1187.1	1201.0	1199.8
132.5°	1216.2	1232.6	1246.4	1257.7	1256.5
135°	1269.2	1289.4	1300.6	1313.4	1310.8
137.5°	1324.6	1339.7	1352.5	1365.0	1361.3
140°	1378.8	1389.1	1402.8	1414.2	1407.9
142.5°	1424.4	1433.2	1449.6	1459.6	1453.3
145°	1472.3	1470.9	1492.4	1501.2	1495.0
147.5°	1513.8	1510.0	1531.5	1537.7	1532.8
150°	1554.3	1545.4	1565.6	1573.1	1566.8
152.5°	1588.3	1578.2	1597.1	1604.7	1595.9
155°	1621.1	1609.8	1625.0	1632.5	1622.4
157.5°	1647.6	1637.5	1648.9	1657.8	1647.6
160°	1670.3	1662.7	1670.3	1677.8	1669.0
162.5°	1690.4	1682.9	1689.2	1698.1	1686.7
165°	1708.1	1700.6	1704.3	1713.2	1704.3
167.5°	1722.0	1714.4	1718.3	1727.2	1715.7
170°	1733.5	1725.8	1728.4	1737.2	1725.8
172.5°	1740.9	1733.5	1735.9	1744.8	1733.5
175°	1747.2	1738.4	1740.9	1749.7	1737.2
177.5°	1749.7	1740.9	1742.2	1751.1	1739.7
180°	1743.4	1743.4	1743.4	1743.4	1743.4

TEST NUMBER: P929114

CATALOG NUMBER: DFN2DIP-HX4F0-120D060US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.31	13.27	13.16	14.12	15.20	8.29	9.24	9.13	10.10	11.17
	3H	14.00	14.85	14.86	15.72	16.82	9.49	10.34	10.34	11.21	12.31
	4H	14.62	15.42	15.49	16.29	17.40	9.94	10.75	10.82	11.62	12.73
	6H	15.05	15.78	15.93	16.67	17.79	10.27	11.01	11.16	11.89	13.02
	8H	15.18	15.88	16.07	16.78	17.90	10.37	11.07	11.26	11.97	13.09
	12H	15.24	15.91	16.14	16.80	17.95	10.42	11.09	11.31	11.98	13.13
4H	2H	12.35	13.15	13.22	14.03	15.14	8.90	9.70	9.77	10.58	11.69
	3H	14.19	14.86	15.08	15.76	16.89	10.26	10.93	11.15	11.84	12.96
	4H	14.89	15.49	15.79	16.40	17.55	10.82	11.42	11.71	12.33	13.48
	6H	15.41	15.93	16.32	16.86	18.01	11.24	11.77	12.16	12.69	13.85
	8H	15.59	16.08	16.50	17.00	18.16	11.38	11.86	12.29	12.79	13.95
	12H	15.69	16.13	16.62	17.07	18.24	11.45	11.89	12.38	12.83	14.00
8H	4H	14.86	15.35	15.78	16.27	17.44	11.11	11.59	12.02	12.51	13.68
	6H	15.44	15.84	16.38	16.80	17.97	11.63	12.03	12.57	13.00	14.16
	8H	15.65	16.01	16.61	16.97	18.15	11.82	12.18	12.77	13.13	14.32
	12H	15.80	16.11	16.75	17.06	18.29	11.95	12.26	12.90	13.21	14.44
12H	4H	14.82	15.26	15.76	16.20	17.37	11.12	11.55	12.05	12.50	13.67
	6H	15.41	15.77	16.36	16.72	17.91	11.68	12.04	12.63	12.99	14.18
	8H	15.64	15.95	16.59	16.90	18.13	11.90	12.21	12.85	13.16	14.39