

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P929126

Luminaire Tested: DFN2DIP-HX4F0-120D090US935-RLLONL

Issue Date: 12/12/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P929126  
REPORT IS A COMBINATION OF REPORTS P900926 AND P896187  
Test Lab: INNOVATION CENTER  
Issue Date: 12/12/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-HX4F0-120D090US935-RLONL  
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 16453.7 lumens  
Efficiency: N/A  
Efficacy: 84.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 194.1  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9954  
Total Harmonic Distortion (THDi): 0.076  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P929126  
CATALOG NUMBER: DFN2DIP-HX4F0-120D090US935-RLLONL

### Luminous Intensity Polar Plot

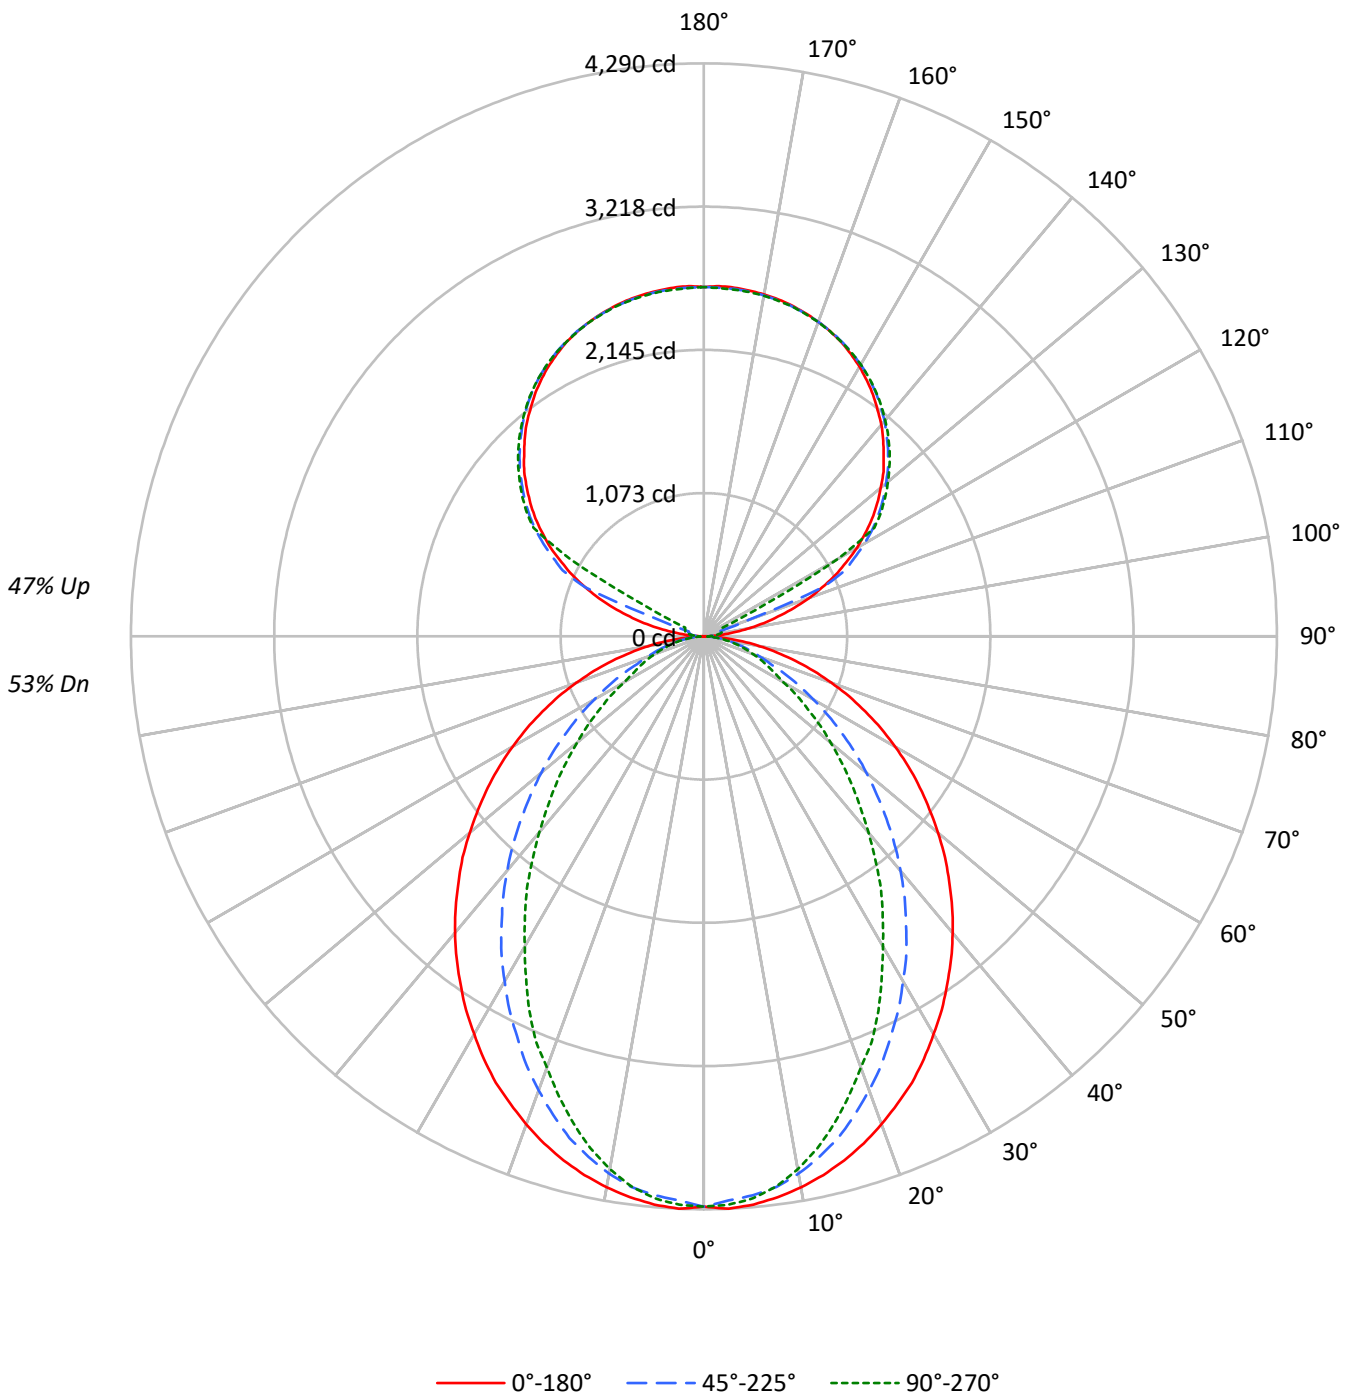



TEST NUMBER: P929126

CATALOG NUMBER: DFN2DIP-HX4F0-120D090US935-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	53	53	53	53
1	99	95	91	88	92	88	85	82	76	73	71	64	62	61	53	52	51	46	46	46	46
2	91	83	78	73	84	78	73	68	67	63	60	57	54	52	47	45	44	39	39	39	39
3	83	74	67	61	77	69	63	58	59	55	51	51	47	44	42	40	38	34	34	34	34
4	76	66	58	52	70	61	55	49	53	48	44	45	42	38	38	35	33	30	30	30	30
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	32	29	26	26	26	26
6	65	53	45	39	60	50	43	37	43	38	34	37	33	30	32	28	26	23	23	23	23
7	60	48	40	35	56	45	38	33	39	34	30	34	30	26	29	26	23	21	21	21	21
8	56	44	36	31	52	41	34	29	36	31	27	31	27	24	27	24	21	19	19	19	19
9	52	40	33	28	48	38	31	26	33	28	24	29	25	22	25	22	19	17	17	17	17
10	49	37	30	25	45	35	28	24	31	25	22	27	23	20	23	20	17	16	16	16	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3175	3175	3175
5°	3180	3125	3145
10°	3149	3064	3043
15°	3106	2963	2885
20°	3049	2824	2691
25°	2991	2668	2503
30°	2912	2507	2266
35°	2835	2335	2057
40°	2757	2157	1817
45°	2666	1959	1600
50°	2572	1759	1388
55°	2473	1546	1185
60°	2360	1323	975
65°	2229	1095	878
70°	2071	884	795
75°	1872	780	724
80°	1583	655	628
85°	1107	439	473

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2666 cd/sqm



TEST NUMBER: P929126

CATALOG NUMBER: DFN2DIP-HX4F0-120D090US935-RLLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	400.2	2.4
10°-20°	1098.7	6.7
20°-30°	1542.5	9.4
30°-40°	1681.4	10.2
40°-50°	1545.4	9.4
50°-60°	1213.7	7.4
60°-70°	790.0	4.8
70°-80°	406.7	2.5
80°-90°	108.4	0.7
90°-100°	86.2	0.5
100°-110°	321.5	2.0
110°-120°	852.6	5.2
120°-130°	1414.1	8.6
130°-140°	1502.1	9.1
140°-150°	1396.0	8.5
150°-160°	1122.4	6.8
160°-170°	723.2	4.4
170°-180°	248.9	1.5
0°-30°	3041.3	18.5
0°-40°	4722.7	28.7
0°-60°	7481.8	45.5
0°-90°	8786.8	53.4
90°-120°	1260.3	7.7
90°-150°	5572.4	33.9
90°-180°	7667.0	46.6
0°-180°	16453.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	4270	4270	4270	4270	4270	
5°	4270	4251	4200	4235	4224	405
15°	4062	4019	3888	3814	3776	1144
25°	3687	3563	3308	3150	3091	1696
35°	3177	2980	2640	2396	2311	1988
45°	2597	2338	1932	1658	1565	2006
55°	1975	1673	1256	1024	951	1764
65°	1333	1020	672	541	529	1322
75°	711	440	309	282	278	752
85°	166	85	73	73	73	191
90°	2	23	38	47	51	15
95°	123	60	74	83	81	146
105°	575	632	116	136	144	615
115°	1088	1120	1168	291	155	1071
125°	1538	1563	1599	1612	1618	1372
135°	1904	1934	1951	1970	1966	1471
145°	2208	2206	2239	2252	2242	1381
155°	2432	2415	2437	2449	2434	1121
165°	2562	2551	2557	2570	2557	724
175°	2621	2608	2611	2625	2606	249
180°	2615	2615	2615	2615	2615	



TEST NUMBER: P929126

CATALOG NUMBER: DFN2DIP-HX4F0-120D090US935-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	4270.2	4270.2	4270.2	4270.2	4270.2
2.5°	4289.5	4270.2	4227.6	4266.5	4258.7
5°	4270.2	4250.9	4200.5	4235.3	4223.9
7.5°	4235.3	4212.4	4158.3	4173.4	4154.2
10°	4189.0	4162.0	4084.8	4073.0	4050.1
12.5°	4131.2	4096.4	3991.8	3968.9	3926.2
15°	4061.5	4018.9	3887.7	3814.2	3775.7
17.5°	3980.3	3918.4	3756.0	3671.2	3609.3
20°	3887.7	3810.2	3617.1	3520.7	3435.4
22.5°	3787.2	3698.3	3474.0	3342.7	3285.0
25°	3686.8	3562.9	3307.9	3149.6	3091.4
27.5°	3567.0	3435.4	3153.3	2971.7	2882.7
30°	3439.5	3292.4	2983.2	2786.4	2681.8
32.5°	3315.7	3137.7	2821.2	2589.2	2492.4
35°	3176.7	2979.5	2639.6	2396.1	2310.8
37.5°	3041.4	2828.6	2469.4	2202.5	2106.2
40°	2898.3	2666.7	2291.6	2017.2	1916.8
42.5°	2751.5	2504.3	2114.0	1827.8	1731.5
45°	2596.9	2337.9	1932.3	1657.7	1565.0
47.5°	2450.1	2175.9	1758.5	1483.8	1399.0
50°	2287.8	2013.5	1588.4	1321.5	1240.7
52.5°	2129.2	1839.3	1426.0	1171.0	1097.6
55°	1974.6	1673.3	1255.9	1024.2	950.8
57.5°	1816.3	1507.2	1105.4	888.9	827.0
60°	1654.0	1344.8	946.7	749.9	688.0
62.5°	1495.7	1186.5	811.4	626.1	595.3
65°	1333.3	1020.1	672.4	541.2	529.3
67.5°	1178.8	865.5	541.2	475.2	463.7
70°	1016.4	715.1	448.2	409.6	394.0
72.5°	861.9	575.7	374.7	344.0	336.2
75°	710.9	440.3	309.2	282.1	278.4
77.5°	560.5	312.8	243.6	228.0	220.2
80°	421.1	224.3	185.3	170.1	170.1
82.5°	293.6	150.8	127.5	119.7	119.7
85°	166.1	84.9	73.4	73.4	73.4
87.5°	61.9	30.7	30.7	27.0	27.0
90°	1.8	22.7	37.7	47.4	51.0
92.5°	47.4	39.8	45.4	49.2	51.0
95°	123.0	60.4	73.7	83.3	81.4
97.5°	221.4	66.3	96.4	102.2	104.0
100°	335.0	75.8	107.9	123.0	126.7
102.5°	459.8	456.2	111.7	132.3	138.2
105°	575.2	632.1	115.5	136.2	143.8
107.5°	709.6	756.8	119.3	140.0	147.7
110°	838.4	878.0	331.2	142.0	149.5



TEST NUMBER: P929126

CATALOG NUMBER: DFN2DIP-HX4F0-120D090US935-RLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	959.5	993.4	961.3	145.6	151.4
115°	1088.0	1120.2	1167.6	291.4	155.2
117.5°	1199.7	1237.5	1269.8	999.1	503.3
120°	1324.6	1353.0	1387.2	1409.8	1154.3
122.5°	1430.6	1460.9	1498.8	1510.0	1512.1
125°	1538.3	1563.1	1599.0	1612.3	1617.9
127.5°	1636.8	1663.3	1691.9	1710.7	1712.5
130°	1729.6	1760.0	1780.6	1801.5	1799.7
132.5°	1824.2	1848.9	1869.6	1886.7	1884.9
135°	1903.8	1934.1	1950.9	1970.1	1966.3
137.5°	1986.9	2009.6	2028.7	2047.5	2041.9
140°	2068.2	2083.5	2104.2	2121.2	2111.9
142.5°	2136.6	2149.8	2174.3	2189.4	2180.0
145°	2208.5	2206.4	2238.6	2251.9	2242.4
147.5°	2270.7	2265.1	2297.2	2306.7	2299.2
150°	2331.4	2318.2	2348.5	2359.7	2350.3
152.5°	2382.4	2367.3	2395.6	2407.1	2393.8
155°	2431.6	2414.8	2437.4	2448.7	2433.6
157.5°	2471.4	2456.3	2473.4	2486.7	2471.4
160°	2505.5	2494.1	2505.5	2516.8	2503.5
162.5°	2535.6	2524.4	2533.8	2547.1	2530.0
165°	2562.2	2550.9	2556.6	2569.8	2556.6
167.5°	2583.1	2571.6	2577.4	2590.7	2573.6
170°	2600.1	2588.7	2592.5	2605.7	2588.7
172.5°	2611.4	2600.1	2603.9	2617.2	2600.1
175°	2620.8	2607.5	2611.4	2624.6	2605.7
177.5°	2624.6	2611.4	2613.4	2626.7	2609.6
180°	2615.2	2615.2	2615.2	2615.2	2615.2



TEST NUMBER: P929126  
 CATALOG NUMBER: DFN2DIP-HX4F0-120D090US935-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.47	12.33	12.41	13.28	14.50	7.45	8.31	8.38	9.25	10.48
	3H	13.16	13.92	14.10	14.88	16.13	8.64	9.41	9.59	10.36	11.61
	4H	13.77	14.49	14.73	15.45	16.71	9.09	9.82	10.05	10.78	12.04
	6H	14.19	14.86	15.16	15.82	17.09	9.42	10.09	10.39	11.05	12.32
	8H	14.32	14.95	15.30	15.94	17.20	9.51	10.14	10.49	11.13	12.39
	12H	14.38	14.98	15.36	15.96	17.25	9.56	10.16	10.54	11.14	12.43
4H	2H	11.50	12.22	12.46	13.18	14.44	8.05	8.77	9.01	9.73	10.99
	3H	13.33	13.93	14.31	14.92	16.19	9.40	10.00	10.38	11.00	12.27
	4H	14.02	14.57	15.01	15.56	16.85	9.95	10.50	10.94	11.49	12.78
	6H	14.54	15.01	15.54	16.02	17.32	10.38	10.85	11.37	11.86	13.15
	8H	14.72	15.16	15.72	16.16	17.47	10.51	10.95	11.50	11.95	13.26
	12H	14.82	15.21	15.83	16.23	17.54	10.57	10.97	11.59	11.99	13.30
8H	4H	13.99	14.44	14.99	15.44	16.74	10.24	10.68	11.23	11.68	12.99
	6H	14.56	14.93	15.58	15.97	17.28	10.76	11.12	11.78	12.16	13.47
	8H	14.78	15.10	15.81	16.13	17.46	10.95	11.27	11.98	12.30	13.62
	12H	14.92	15.20	15.95	16.23	17.60	11.07	11.35	12.10	12.38	13.75
12H	4H	13.95	14.35	14.96	15.36	16.68	10.24	10.64	11.26	11.66	12.97
	6H	14.54	14.86	15.57	15.89	17.21	10.81	11.13	11.84	12.16	13.48
	8H	14.76	15.04	15.79	16.07	17.44	11.02	11.30	12.05	12.33	13.70