

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P929188

Luminaire Tested: DFN2DIP-HX4F0-050D070US940-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P929188
REPORT IS A COMBINATION OF REPORTS P900875 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-050D070US940-FLLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10597.0 lumens
Efficiency: N/A
Efficacy: 110.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 95.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9957
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P929188

CATALOG NUMBER: DFN2DIP-HX4F0-050D070US940-FLLONL

Luminous Intensity Polar Plot

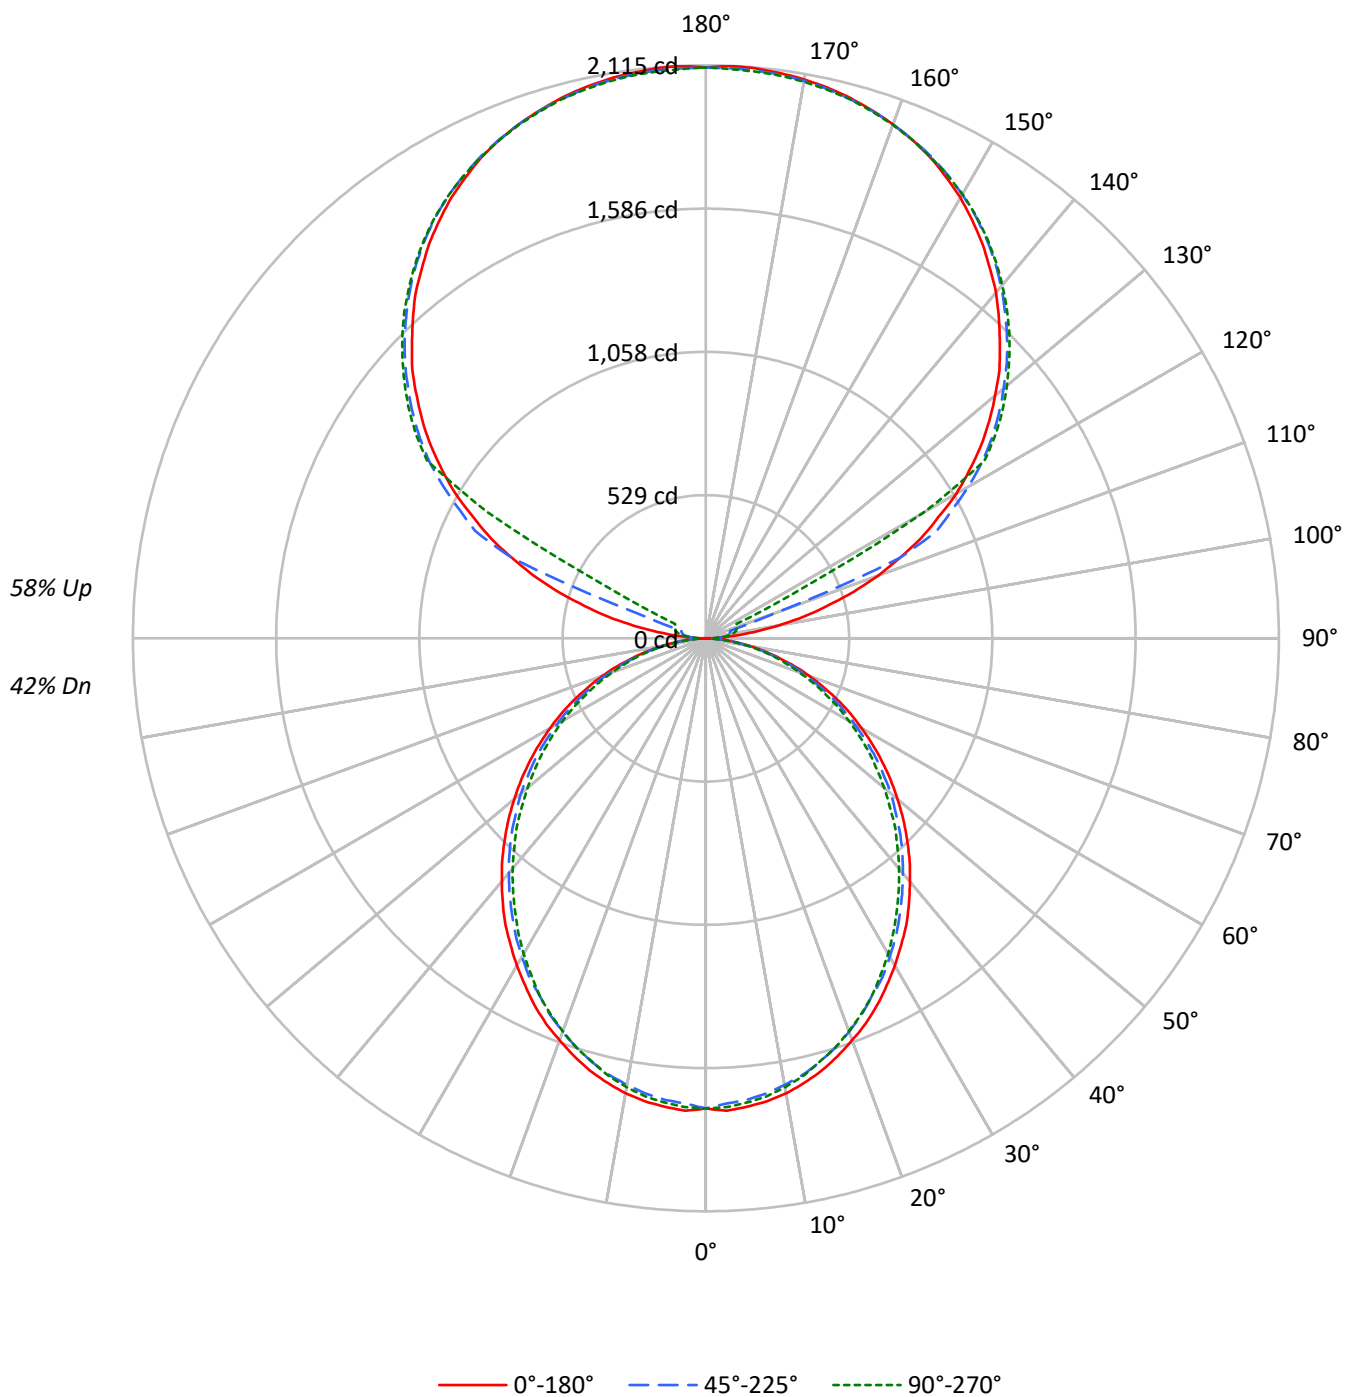

TEST NUMBER: P929188

CATALOG NUMBER: DFN2DIP-HX4F0-050D070US940-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49
1	96	92	88	84	87	84	80	78	69	67	65	55	54	52	43	42	41
2	87	80	74	69	79	73	68	64	60	57	53	49	46	44	38	36	34
3	80	70	63	57	72	64	58	53	53	49	45	43	40	37	33	31	29
4	73	62	54	48	66	57	50	45	47	42	38	38	35	32	30	27	25
5	67	55	47	41	61	51	44	39	42	37	33	34	30	27	27	24	22
6	62	50	42	36	56	46	39	33	38	33	29	31	27	24	24	22	19
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17
8	53	41	33	28	48	37	31	26	31	26	22	26	22	19	20	18	15
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1290	1290	1290
5°	1293	1273	1281
10°	1282	1256	1264
15°	1263	1235	1237
20°	1238	1206	1209
25°	1213	1172	1177
30°	1181	1140	1136
35°	1151	1103	1093
40°	1114	1065	1052
45°	1077	1027	1010
50°	1037	987	962
55°	995	941	917
60°	947	886	866
65°	896	829	806
70°	830	760	741
75°	738	677	681
80°	628	572	567
85°	455	389	377

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1082 cd/sqm

TEST NUMBER: P929188

CATALOG NUMBER: DFN2DIP-HX4F0-050D070US940-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	163.3	1.5
10°-20°	459.6	4.3
20°-30°	675.4	6.4
30°-40°	784.4	7.4
40°-50°	783.4	7.4
50°-60°	683.1	6.4
60°-70°	505.0	4.8
70°-80°	285.7	2.7
80°-90°	79.1	0.7
90°-100°	69.5	0.7
100°-110°	259.0	2.4
110°-120°	687.0	6.5
120°-130°	1139.4	10.8
130°-140°	1210.3	11.4
140°-150°	1124.9	10.6
150°-160°	904.4	8.5
160°-170°	582.7	5.5
170°-180°	200.6	1.9
0°-30°	1298.3	12.3
0°-40°	2082.7	19.7
0°-60°	3549.3	33.5
0°-90°	4419.1	41.7
90°-120°	1015.5	9.6
90°-150°	4490.2	42.4
90°-180°	6178.0	58.3
0°-180°	10597.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1735	1735	1735	1735	1735	
5°	1735	1729	1710	1724	1721	165
15°	1652	1642	1620	1627	1619	465
25°	1495	1482	1454	1457	1454	688
35°	1290	1273	1247	1236	1228	806
45°	1050	1038	1013	995	988	810
55°	794	784	764	744	736	710
65°	536	526	509	494	486	530
75°	280	277	269	259	262	299
85°	68	67	65	60	58	76
90°	1	18	30	38	41	10
95°	99	49	59	67	66	117
105°	464	509	93	110	116	495
115°	877	903	941	235	125	863
125°	1240	1260	1288	1299	1304	1106
135°	1534	1558	1572	1587	1584	1185
145°	1780	1778	1804	1814	1807	1113
155°	1959	1946	1964	1973	1961	903
165°	2064	2056	2060	2071	2060	583
175°	2112	2101	2104	2115	2100	201
180°	2107	2107	2107	2107	2107	

TEST NUMBER: P929188

CATALOG NUMBER: DFN2DIP-HX4F0-050D070US940-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1735.4	1735.4	1735.4	1735.4	1735.4
2.5°	1745.5	1737.2	1718.8	1735.4	1732.3
5°	1735.4	1728.9	1710.4	1723.7	1720.6
7.5°	1723.7	1713.8	1695.4	1708.9	1705.5
10°	1705.5	1693.8	1673.8	1687.0	1682.1
12.5°	1680.3	1670.4	1650.5	1658.8	1655.4
15°	1652.0	1642.1	1620.3	1627.1	1618.7
17.5°	1616.9	1607.0	1585.3	1593.6	1585.3
20°	1578.6	1568.7	1545.3	1550.2	1543.7
22.5°	1540.3	1525.2	1503.5	1503.5	1500.1
25°	1495.2	1481.9	1453.5	1456.7	1453.5
27.5°	1445.0	1433.4	1411.8	1406.8	1398.5
30°	1395.1	1381.7	1356.7	1351.7	1345.0
32.5°	1341.7	1331.8	1305.0	1294.9	1288.2
35°	1289.9	1273.3	1246.6	1236.5	1228.2
37.5°	1231.5	1216.5	1189.7	1178.1	1169.8
40°	1171.6	1158.1	1131.3	1116.4	1109.7
42.5°	1113.1	1099.7	1073.1	1056.2	1046.3
45°	1049.7	1038.0	1012.9	994.7	987.9
47.5°	987.9	976.2	949.5	931.1	921.2
50°	922.8	914.5	891.1	867.7	859.4
52.5°	859.4	847.7	826.1	807.7	796.0
55°	794.4	784.3	764.3	744.3	736.0
57.5°	729.2	720.9	699.1	679.2	672.4
60°	664.1	657.6	634.2	615.7	610.8
62.5°	600.8	589.1	572.4	555.7	549.0
65°	535.7	525.7	509.0	494.0	485.6
67.5°	469.0	460.5	445.6	434.0	427.2
70°	407.2	400.5	385.4	373.7	367.2
72.5°	343.9	337.1	328.8	317.1	312.1
75°	280.3	277.1	268.6	258.7	262.1
77.5°	223.6	216.8	213.5	208.5	203.6
80°	167.0	165.2	161.8	156.9	153.5
82.5°	113.5	113.5	111.9	105.2	105.2
85°	68.3	66.7	65.1	60.0	58.4
87.5°	30.1	26.8	23.4	18.4	16.7
90°	1.4	18.3	30.4	38.2	41.1
92.5°	38.2	32.0	36.6	39.7	41.1
95°	99.0	48.7	59.4	67.2	65.6
97.5°	178.3	53.4	77.7	82.4	83.8
100°	270.0	61.0	86.9	99.0	102.1
102.5°	370.4	367.6	90.0	106.7	111.3
105°	463.6	509.3	93.0	109.7	115.9
107.5°	571.8	609.9	96.2	112.8	119.0
110°	675.6	707.4	266.9	114.4	120.4

TEST NUMBER: P929188

CATALOG NUMBER: DFN2DIP-HX4F0-050D070US940-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	773.2	800.5	774.6	117.3	122.0
115°	876.7	902.6	940.8	234.9	125.1
117.5°	966.7	997.2	1023.2	805.0	405.6
120°	1067.4	1090.2	1117.8	1136.1	930.2
122.5°	1152.6	1177.1	1207.8	1216.8	1218.4
125°	1239.6	1259.5	1288.5	1299.2	1303.7
127.5°	1318.9	1340.2	1363.2	1378.5	1379.9
130°	1393.7	1418.1	1434.8	1451.6	1450.2
132.5°	1469.9	1489.8	1506.5	1520.2	1518.8
135°	1534.0	1558.4	1572.1	1587.4	1584.4
137.5°	1601.0	1619.3	1634.7	1649.9	1645.4
140°	1666.5	1678.8	1695.5	1709.3	1701.7
142.5°	1721.6	1732.3	1752.0	1764.1	1756.5
145°	1779.5	1777.9	1803.8	1814.5	1806.9
147.5°	1829.7	1825.2	1851.1	1858.7	1852.7
150°	1878.6	1867.9	1892.4	1901.4	1893.8
152.5°	1919.7	1907.5	1930.4	1939.6	1929.0
155°	1959.4	1945.7	1964.0	1973.1	1961.0
157.5°	1991.4	1979.3	1993.0	2003.7	1991.4
160°	2019.0	2009.7	2019.0	2028.0	2017.3
162.5°	2043.2	2034.1	2041.7	2052.4	2038.7
165°	2064.5	2055.5	2060.0	2070.7	2060.0
167.5°	2081.4	2072.1	2076.8	2087.5	2073.8
170°	2095.1	2085.9	2089.0	2099.7	2085.9
172.5°	2104.2	2095.1	2098.3	2108.9	2095.1
175°	2111.8	2101.1	2104.2	2114.8	2099.7
177.5°	2114.8	2104.2	2105.8	2116.5	2102.7
180°	2107.3	2107.3	2107.3	2107.3	2107.3



TEST NUMBER: P929188

CATALOG NUMBER: DFN2DIP-HX4F0-050D070US940-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.34	8.13	8.36	9.16	10.55	6.91	7.70	7.93	8.73	10.12
	3H	9.00	9.70	10.03	10.75	12.15	8.52	9.23	9.56	10.27	11.68
	4H	9.58	10.25	10.63	11.30	12.71	9.11	9.78	10.15	10.82	12.24
	6H	9.98	10.60	11.03	11.65	13.07	9.50	10.12	10.56	11.17	12.59
	8H	10.08	10.67	11.14	11.73	13.15	9.61	10.19	10.67	11.26	12.68
	12H	10.13	10.69	11.19	11.75	13.19	9.65	10.21	10.71	11.26	12.71
4H	2H	7.79	8.47	8.85	9.51	10.92	7.45	8.12	8.50	9.17	10.58
	3H	9.65	10.22	10.72	11.29	12.71	9.26	9.82	10.32	10.89	12.32
	4H	10.37	10.88	11.43	11.94	13.39	9.96	10.48	11.03	11.54	12.98
	6H	10.88	11.32	11.96	12.41	13.85	10.47	10.91	11.55	12.00	13.44
	8H	11.03	11.44	12.10	12.52	13.98	10.61	11.03	11.69	12.11	13.56
	12H	11.10	11.47	12.19	12.56	14.03	10.68	11.05	11.77	12.14	13.60
8H	4H	10.56	10.97	11.64	12.05	13.51	10.20	10.61	11.28	11.69	13.15
	6H	11.19	11.53	12.29	12.65	14.10	10.82	11.17	11.92	12.29	13.74
	8H	11.41	11.71	12.52	12.81	14.28	11.04	11.34	12.15	12.44	13.92
	12H	11.54	11.80	12.65	12.90	14.41	11.15	11.42	12.26	12.52	14.03
12H	4H	10.54	10.91	11.64	12.01	13.47	10.19	10.56	11.28	11.65	13.12
	6H	11.22	11.52	12.32	12.62	14.09	10.87	11.16	11.97	12.27	13.74
	8H	11.46	11.72	12.57	12.82	14.33	11.10	11.36	12.21	12.46	13.97