

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P929388

Luminaire Tested: DFN2DIP-HX4F0-100D120US940-FLLONL

Issue Date: 12/12/2024

Test Information

Test Method: LM-79-2019
Report Number: P929388
REPORT IS A COMBINATION OF REPORTS P900975 AND P896187
Test Lab: INNOVATION CENTER
Issue Date: 12/12/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-100D120US940-FLLONL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 19427.7 lumens
Efficiency: N/A
Efficacy: 99.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 195.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.946
Total Harmonic Distortion (THDi): 0.132
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P929388

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US940-FLLONL

Luminous Intensity Polar Plot

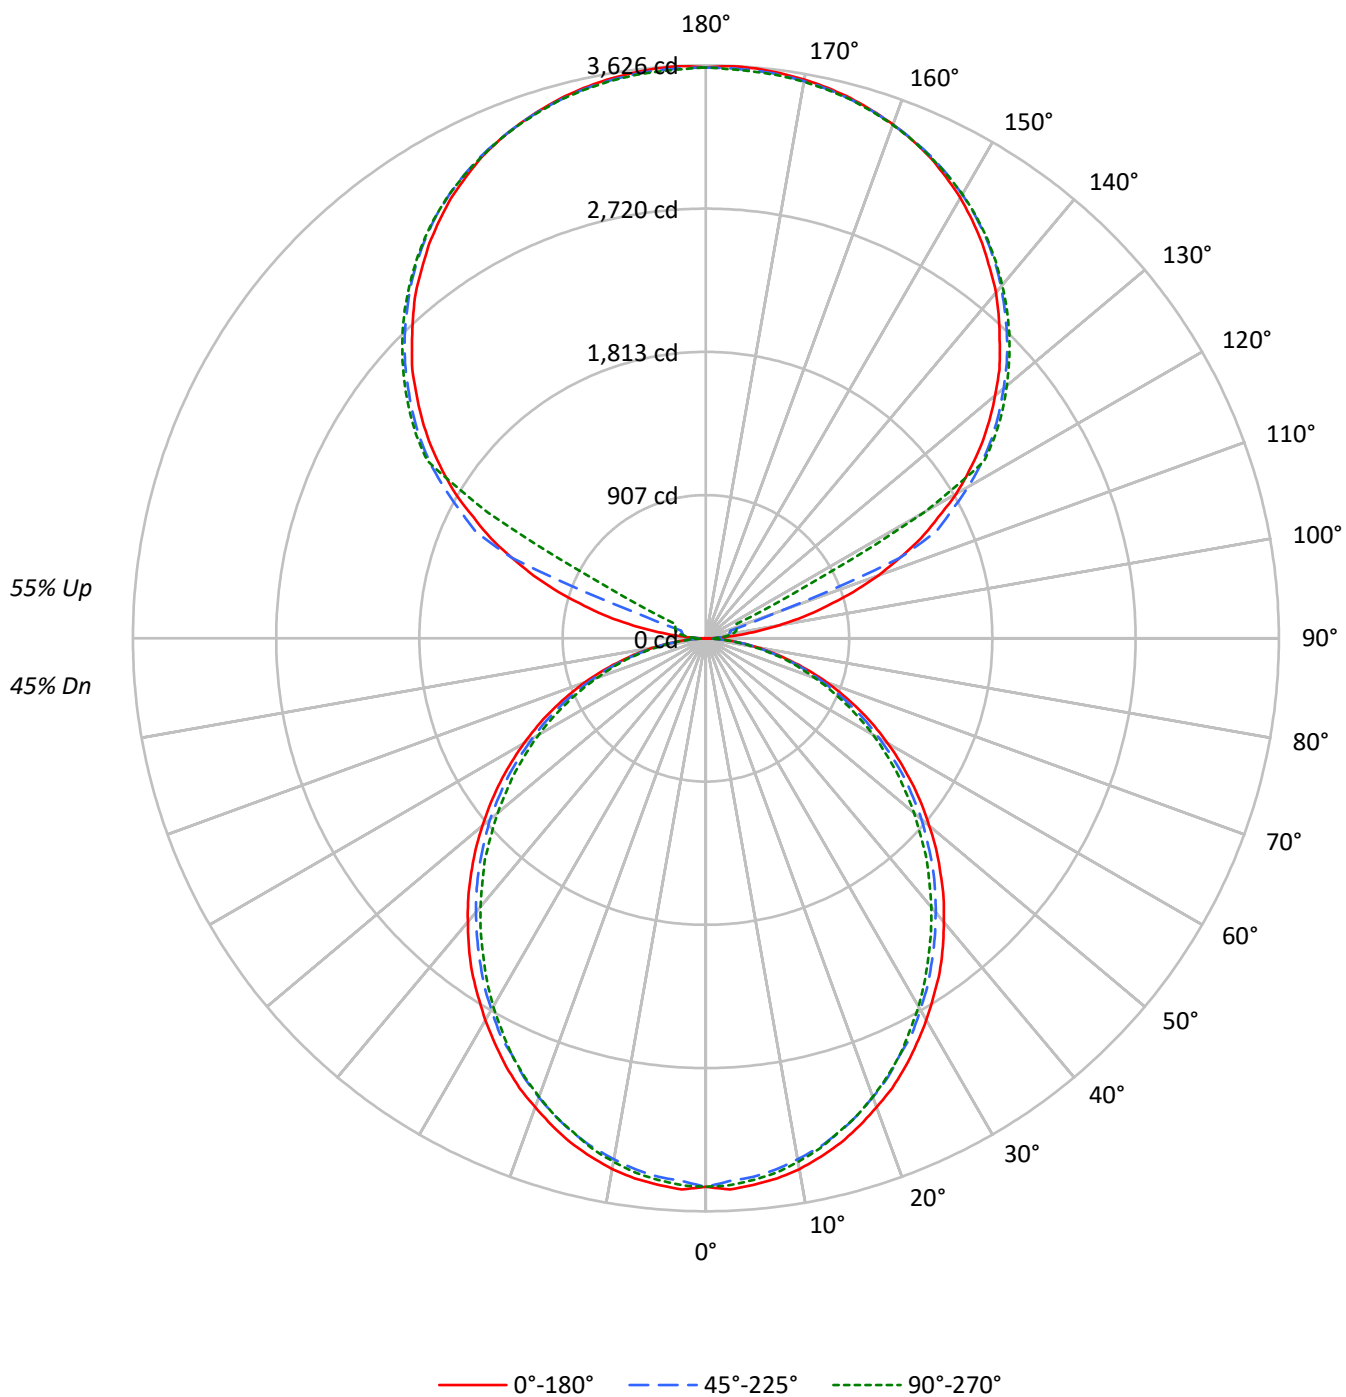

TEST NUMBER: P929388

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US940-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52
1	97	92	89	85	89	85	82	79	71	68	66	58	56	55	46	45	44
2	88	81	75	70	81	74	69	65	62	58	55	51	48	46	40	39	37
3	80	71	64	58	73	65	59	54	55	50	46	45	42	39	36	33	31
4	74	63	55	49	67	58	51	46	49	43	39	40	36	33	32	29	27
5	67	56	48	42	62	52	45	39	43	38	34	36	32	29	29	26	24
6	62	50	42	36	57	46	39	34	39	34	30	32	28	25	26	23	21
7	57	45	37	32	53	42	35	30	35	30	26	30	25	22	24	21	18
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	17
9	50	37	30	25	45	35	28	24	30	24	21	25	21	18	20	17	15
10	46	34	27	22	42	32	25	21	27	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2581	2581	2581
5°	2585	2545	2562
10°	2564	2511	2528
15°	2527	2470	2473
20°	2476	2413	2418
25°	2426	2344	2354
30°	2362	2281	2273
35°	2302	2205	2186
40°	2229	2130	2104
45°	2155	2054	2021
50°	2074	1974	1924
55°	1990	1881	1834
60°	1895	1772	1732
65°	1791	1659	1611
70°	1659	1520	1482
75°	1476	1355	1362
80°	1256	1144	1133
85°	911	780	754

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2155 cd/sqm

TEST NUMBER: P929388

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US940-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	326.7	1.7
10°-20°	919.1	4.7
20°-30°	1350.8	7.0
30°-40°	1568.8	8.1
40°-50°	1566.9	8.1
50°-60°	1366.3	7.0
60°-70°	1010.0	5.2
70°-80°	571.4	2.9
80°-90°	157.2	0.8
90°-100°	119.1	0.6
100°-110°	444.1	2.3
110°-120°	1177.7	6.1
120°-130°	1953.3	10.1
130°-140°	2074.9	10.7
140°-150°	1928.4	9.9
150°-160°	1550.3	8.0
160°-170°	999.0	5.1
170°-180°	343.8	1.8
0°-30°	2596.6	13.4
0°-40°	4165.4	21.4
0°-60°	7098.5	36.5
0°-90°	8837.1	45.5
90°-120°	1740.9	9.0
90°-150°	7697.4	39.6
90°-180°	10591.0	54.5
0°-180°	19427.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3471	3471	3471	3471	3471	
5°	3471	3458	3421	3448	3441	329
15°	3304	3284	3241	3254	3238	931
25°	2990	2964	2907	2914	2907	1376
35°	2580	2547	2493	2473	2456	1611
45°	2099	2076	2026	1989	1976	1620
55°	1589	1569	1529	1489	1472	1420
65°	1072	1051	1018	988	971	1059
75°	560	554	537	517	524	598
85°	137	134	130	120	117	152
90°	2	31	52	66	70	18
95°	170	84	102	115	112	201
105°	795	873	160	188	199	849
115°	1503	1547	1613	403	214	1480
125°	2125	2159	2209	2227	2235	1895
135°	2630	2672	2695	2721	2716	2031
145°	3051	3048	3092	3111	3098	1908
155°	3359	3336	3367	3382	3362	1548
165°	3539	3524	3531	3550	3531	1000
175°	3620	3602	3607	3626	3599	345
180°	3612	3612	3612	3612	3612	

TEST NUMBER: P929388

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US940-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3470.9	3470.9	3470.9	3470.9	3470.9
2.5°	3491.0	3474.3	3437.5	3470.9	3464.4
5°	3470.9	3457.7	3420.9	3447.5	3441.1
7.5°	3447.5	3427.6	3390.8	3417.7	3411.0
10°	3411.0	3387.6	3347.6	3374.2	3364.3
12.5°	3360.7	3340.9	3300.8	3317.5	3310.7
15°	3304.1	3284.3	3240.6	3254.1	3237.5
17.5°	3233.9	3214.1	3170.5	3187.2	3170.5
20°	3157.1	3137.3	3090.5	3100.4	3087.3
22.5°	3080.6	3050.6	3006.9	3006.9	3000.2
25°	2990.3	2963.8	2907.1	2913.5	2907.1
27.5°	2890.1	2866.7	2823.5	2813.6	2797.0
30°	2790.3	2763.3	2713.4	2703.5	2690.0
32.5°	2683.3	2663.5	2610.0	2589.8	2576.4
35°	2579.9	2546.7	2493.1	2473.0	2456.3
37.5°	2463.1	2432.9	2379.5	2356.1	2339.4
40°	2343.0	2316.1	2262.6	2232.9	2219.5
42.5°	2226.2	2199.2	2146.2	2112.5	2092.7
45°	2099.4	2076.0	2025.7	1989.2	1975.9
47.5°	1975.9	1952.5	1899.0	1862.1	1842.3
50°	1845.5	1828.9	1782.1	1735.4	1718.8
52.5°	1718.8	1695.4	1652.2	1615.4	1592.0
55°	1588.8	1568.7	1528.6	1488.6	1472.0
57.5°	1458.5	1441.8	1398.3	1358.3	1344.9
60°	1328.2	1315.1	1268.3	1231.5	1221.6
62.5°	1201.4	1178.1	1144.8	1111.5	1098.1
65°	1071.5	1051.3	1018.0	987.9	971.3
67.5°	938.0	921.0	891.3	867.9	854.4
70°	814.4	800.9	770.9	747.5	734.4
72.5°	687.6	674.2	657.6	634.2	624.2
75°	560.5	554.2	537.2	517.4	524.0
77.5°	447.2	433.8	427.0	417.1	407.2
80°	333.9	330.4	323.6	313.7	307.0
82.5°	227.0	227.0	223.8	210.3	210.3
85°	136.7	133.5	130.3	120.1	116.9
87.5°	60.2	53.4	46.7	36.8	33.3
90°	2.5	31.3	52.2	65.5	70.5
92.5°	65.5	54.9	62.7	68.0	70.5
95°	169.7	83.5	101.8	115.2	112.4
97.5°	305.8	91.6	133.2	141.2	143.7
100°	462.8	104.6	149.0	169.7	175.1
102.5°	635.1	630.1	154.2	182.9	190.9
105°	794.6	873.2	159.6	188.1	198.6
107.5°	980.2	1045.4	164.8	193.4	203.9
110°	1158.1	1212.8	457.5	196.2	206.4

TEST NUMBER: P929388

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US940-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1325.4	1372.3	1327.9	201.1	209.2
115°	1502.9	1547.4	1612.8	402.6	214.5
117.5°	1657.2	1709.4	1754.1	1380.0	695.3
120°	1829.8	1868.9	1916.1	1947.5	1594.5
122.5°	1976.0	2018.0	2070.4	2085.9	2088.7
125°	2125.0	2159.2	2208.9	2227.1	2234.9
127.5°	2261.0	2297.6	2337.0	2363.1	2365.6
130°	2389.1	2431.1	2459.6	2488.5	2486.0
132.5°	2519.8	2554.0	2582.5	2606.2	2603.7
135°	2629.7	2671.6	2694.9	2721.3	2716.1
137.5°	2744.6	2775.9	2802.3	2828.4	2820.6
140°	2857.0	2878.0	2906.6	2930.2	2917.2
142.5°	2951.3	2969.6	3003.5	3024.2	3011.2
145°	3050.6	3047.9	3092.2	3110.6	3097.5
147.5°	3136.6	3128.9	3173.3	3186.3	3176.1
150°	3220.4	3202.1	3244.0	3259.5	3246.5
152.5°	3290.9	3270.1	3309.2	3325.0	3306.7
155°	3358.8	3335.5	3366.9	3382.5	3361.7
157.5°	3413.8	3393.0	3416.6	3434.9	3413.8
160°	3461.0	3445.2	3461.0	3476.5	3458.2
162.5°	3502.6	3487.1	3500.1	3518.4	3494.9
165°	3539.2	3523.7	3531.4	3549.8	3531.4
167.5°	3568.1	3552.2	3560.3	3578.6	3555.1
170°	3591.6	3575.8	3581.1	3599.4	3575.8
172.5°	3607.2	3591.6	3597.0	3615.3	3591.6
175°	3620.2	3601.9	3607.2	3625.5	3599.4
177.5°	3625.5	3607.2	3610.0	3628.3	3604.8
180°	3612.5	3612.5	3612.5	3612.5	3612.5

TEST NUMBER: P929388

CATALOG NUMBER: DFN2DIP-HX4F0-100D120US940-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.13	10.96	11.13	11.96	13.30	9.70	10.52	10.70	11.53	12.87
	3H	11.79	12.53	12.80	13.55	14.90	11.32	12.06	12.33	13.07	14.43
	4H	12.38	13.08	13.40	14.10	15.46	11.91	12.60	12.92	13.62	14.99
	6H	12.78	13.42	13.81	14.44	15.82	12.30	12.95	13.33	13.97	15.34
	8H	12.88	13.49	13.92	14.53	15.90	12.41	13.02	13.44	14.06	15.43
	12H	12.93	13.51	13.97	14.54	15.94	12.45	13.03	13.49	14.06	15.46
4H	2H	10.59	11.29	11.62	12.31	13.67	10.25	10.95	11.27	11.96	13.33
	3H	12.46	13.04	13.49	14.09	15.46	12.06	12.65	13.10	13.69	15.07
	4H	13.17	13.70	14.21	14.74	16.14	12.76	13.30	13.80	14.34	15.73
	6H	13.68	14.14	14.73	15.20	16.60	13.27	13.73	14.32	14.79	16.19
	8H	13.83	14.26	14.88	15.32	16.73	13.42	13.85	14.47	14.90	16.31
	12H	13.90	14.29	14.97	15.36	16.78	13.48	13.87	14.55	14.94	16.35
8H	4H	13.36	13.79	14.41	14.85	16.26	13.00	13.43	14.05	14.49	15.90
	6H	13.99	14.35	15.07	15.45	16.85	13.63	13.99	14.71	15.08	16.49
	8H	14.22	14.53	15.30	15.61	17.03	13.85	14.16	14.93	15.24	16.66
	12H	14.35	14.62	15.43	15.70	17.16	13.96	14.24	15.05	15.31	16.78
12H	4H	13.35	13.73	14.42	14.80	16.22	13.00	13.38	14.06	14.45	15.87
	6H	14.02	14.34	15.11	15.42	16.84	13.67	13.98	14.75	15.06	16.49
	8H	14.27	14.54	15.35	15.61	17.08	13.91	14.18	14.99	15.26	16.72