

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924556

Luminaire Tested: DFN2DIP-HX4F0-060D090US950-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924556
REPORT IS A COMBINATION OF REPORTS P899393 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-060D090US950-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13265.4 lumens
Efficiency: N/A
Efficacy: 126.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 105.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924556

CATALOG NUMBER: DFN2DIP-HX4F0-060D090US950-FLLFLL

Luminous Intensity Polar Plot

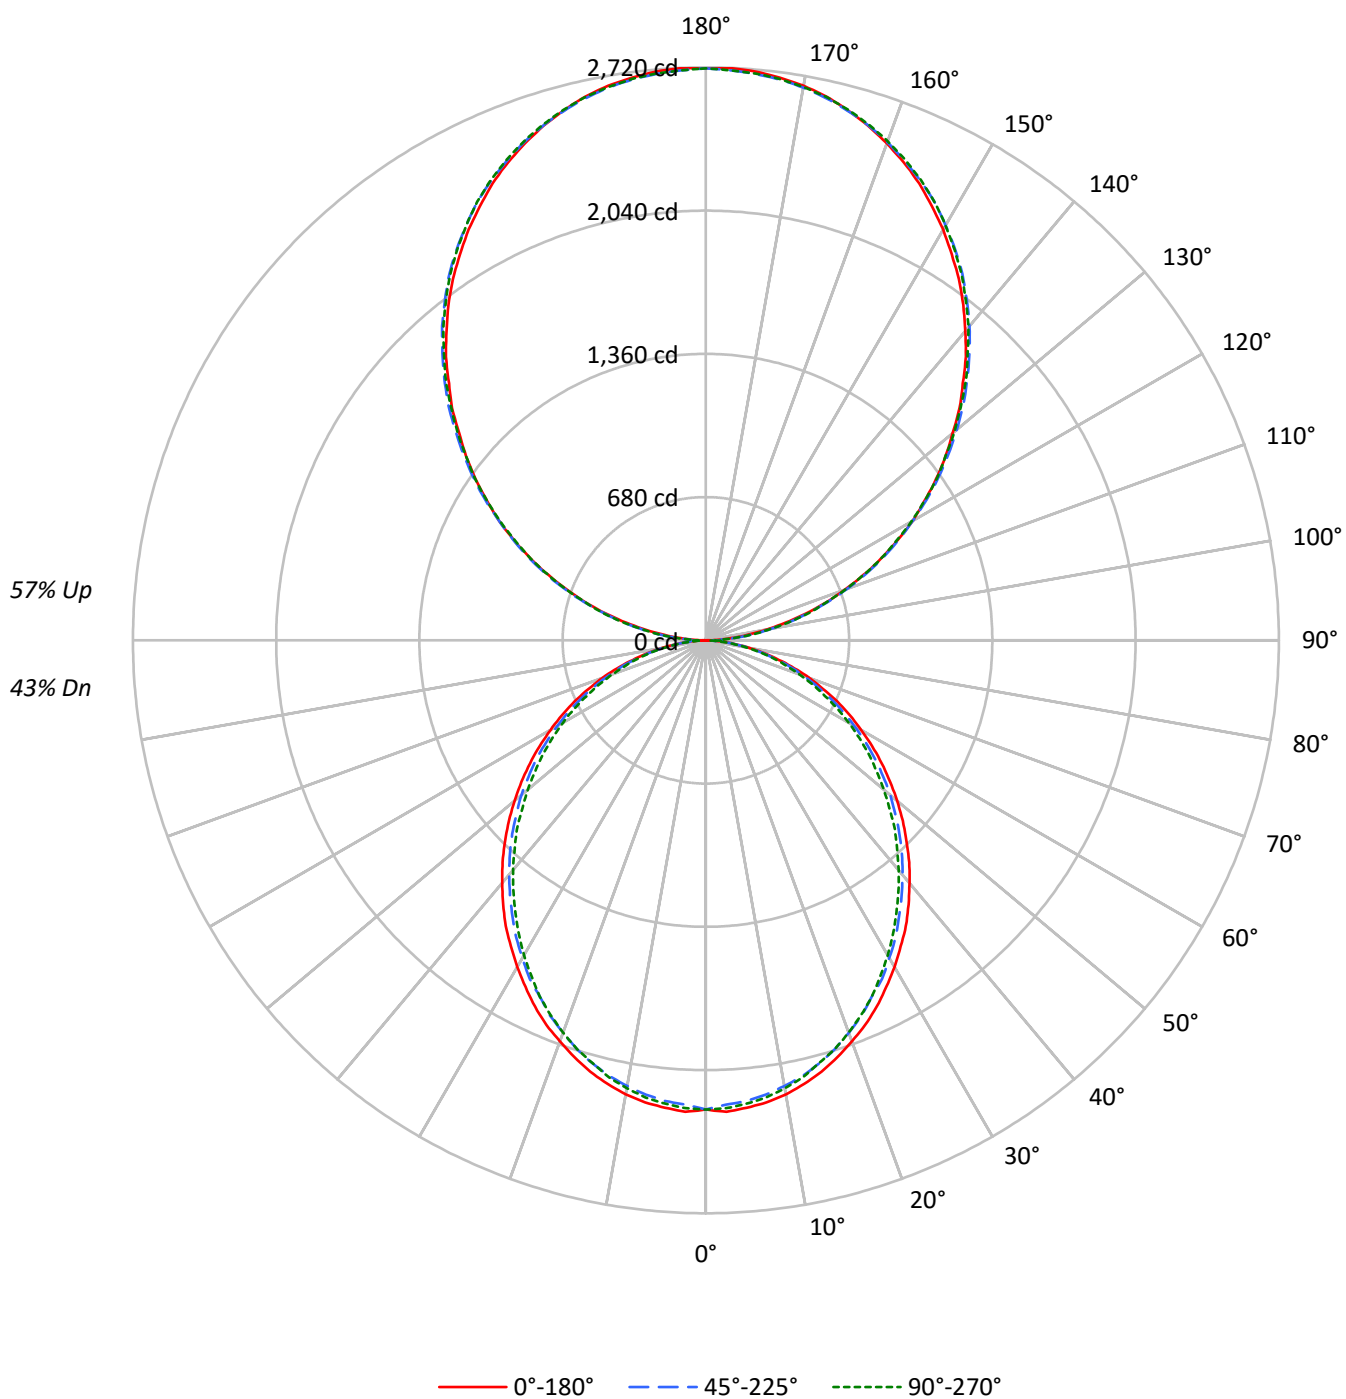

TEST NUMBER: P924556

CATALOG NUMBER: DFN2DIP-HX4F0-060D090US950-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	44	43	42
2	88	80	74	69	80	73	68	64	61	57	54	49	47	44	38	37	35
3	80	70	63	57	73	65	58	53	54	49	45	44	40	37	34	32	30
4	73	62	55	49	66	57	50	45	48	43	39	39	35	32	30	28	26
5	67	56	47	42	61	51	44	39	43	37	33	35	31	28	27	25	22
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20
7	57	45	37	31	52	41	34	29	35	29	25	29	24	21	23	20	18
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14
10	46	34	27	22	42	31	25	21	27	22	18	22	18	15	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1656	1656	1656
5°	1659	1633	1644
10°	1646	1611	1622
15°	1621	1585	1587
20°	1589	1548	1552
25°	1557	1504	1511
30°	1516	1463	1458
35°	1478	1415	1403
40°	1430	1367	1350
45°	1383	1318	1297
50°	1331	1267	1234
55°	1277	1207	1177
60°	1216	1137	1111
65°	1149	1064	1034
70°	1065	975	951
75°	947	869	874
80°	806	734	727
85°	585	500	484

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2048 cd/sqm

TEST NUMBER: P924556

CATALOG NUMBER: DFN2DIP-HX4F0-060D090US950-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	209.6	1.6
10°-20°	589.8	4.4
20°-30°	866.8	6.5
30°-40°	1006.7	7.6
40°-50°	1005.5	7.6
50°-60°	876.7	6.6
60°-70°	648.1	4.9
70°-80°	366.7	2.8
80°-90°	104.5	0.8
90°-100°	168.0	1.3
100°-110°	533.9	4.0
110°-120°	913.7	6.9
120°-130°	1201.6	9.1
130°-140°	1348.7	10.2
140°-150°	1322.6	10.0
150°-160°	1109.5	8.4
160°-170°	735.8	5.5
170°-180°	257.2	1.9
0°-30°	1666.2	12.6
0°-40°	2673.0	20.1
0°-60°	4555.2	34.3
0°-90°	5674.5	42.8
90°-120°	1615.6	12.2
90°-150°	5488.5	41.4
90°-180°	7591.0	57.2
0°-180°	13265.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2227	2227	2227	2227	2227	
5°	2227	2219	2195	2212	2208	211
15°	2120	2108	2080	2088	2078	597
25°	1919	1902	1866	1870	1866	883
35°	1656	1634	1600	1587	1576	1034
45°	1347	1332	1300	1276	1268	1040
55°	1020	1007	981	955	945	912
65°	688	675	653	634	623	680
75°	360	356	345	332	336	384
85°	88	86	84	77	75	98
90°	2	30	80	75	78	13
95°	120	142	146	146	142	133
105°	493	499	504	508	508	520
115°	917	930	926	924	917	907
125°	1334	1354	1348	1340	1338	1192
135°	1725	1750	1755	1753	1746	1333
145°	2094	2110	2124	2126	2117	1308
155°	2394	2401	2408	2420	2413	1102
165°	2605	2602	2602	2619	2607	735
175°	2710	2704	2699	2716	2702	258
180°	2716	2716	2716	2716	2716	

TEST NUMBER: P924556

CATALOG NUMBER: DFN2DIP-HX4F0-060D090US950-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2227.2	2227.2	2227.2	2227.2	2227.2
2.5°	2240.2	2229.5	2205.8	2227.2	2223.1
5°	2227.2	2218.8	2195.2	2212.2	2208.1
7.5°	2212.2	2199.5	2175.9	2193.2	2188.9
10°	2188.9	2173.9	2148.1	2165.2	2158.8
12.5°	2156.6	2143.8	2118.2	2128.9	2124.6
15°	2120.2	2107.5	2079.5	2088.2	2077.5
17.5°	2075.2	2062.5	2034.6	2045.2	2034.6
20°	2025.9	2013.2	1983.2	1989.6	1981.2
22.5°	1976.9	1957.5	1929.6	1929.6	1925.3
25°	1918.9	1901.9	1865.5	1869.6	1865.5
27.5°	1854.6	1839.6	1811.8	1805.5	1794.9
30°	1790.6	1773.2	1741.2	1734.8	1726.2
32.5°	1721.9	1709.2	1674.8	1661.9	1653.3
35°	1655.6	1634.2	1599.9	1586.9	1576.2
37.5°	1580.6	1561.2	1527.0	1511.9	1501.2
40°	1503.5	1486.2	1452.0	1432.9	1424.2
42.5°	1428.5	1411.3	1377.2	1355.6	1342.9
45°	1347.2	1332.2	1299.9	1276.5	1267.9
47.5°	1267.9	1252.9	1218.6	1195.0	1182.2
50°	1184.3	1173.6	1143.7	1113.6	1102.9
52.5°	1102.9	1087.9	1060.2	1036.6	1021.6
55°	1019.5	1006.6	980.9	955.2	944.6
57.5°	936.0	925.3	897.3	871.7	863.0
60°	852.3	843.9	814.0	790.3	783.9
62.5°	770.9	755.9	734.6	713.2	704.6
65°	687.5	674.7	653.3	633.9	623.2
67.5°	601.9	591.0	571.9	556.9	548.3
70°	522.6	514.0	494.6	479.7	471.3
72.5°	441.2	432.6	422.0	407.0	400.6
75°	359.7	355.7	344.7	332.0	336.3
77.5°	287.0	278.4	274.0	267.7	261.3
80°	214.3	212.0	207.7	201.3	197.0
82.5°	145.7	145.7	143.6	135.0	135.0
85°	87.7	85.7	83.6	77.0	75.0
87.5°	38.6	34.3	30.0	23.7	21.4
90°	2.5	29.5	80.2	75.3	77.8
92.5°	50.8	68.8	71.3	73.6	73.6
95°	119.5	142.4	146.5	146.5	142.4
97.5°	198.9	220.2	229.2	229.2	229.2
100°	290.6	309.5	316.0	316.0	313.6
102.5°	387.2	401.2	410.1	412.6	410.1
105°	492.8	499.3	504.3	508.4	508.4
107.5°	597.6	607.4	607.4	609.0	597.6
110°	699.1	712.3	712.3	712.3	705.7

TEST NUMBER: P924556

CATALOG NUMBER: DFN2DIP-HX4F0-060D090US950-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	808.8	822.7	820.2	813.8	808.8
115°	916.9	930.0	925.9	923.5	916.9
117.5°	1024.1	1042.1	1030.7	1024.1	1017.5
120°	1132.2	1150.1	1132.2	1132.2	1124.8
122.5°	1230.4	1253.4	1241.9	1235.3	1230.4
125°	1333.6	1354.0	1347.5	1340.1	1337.7
127.5°	1434.2	1459.6	1450.7	1440.8	1434.2
130°	1528.4	1557.9	1553.8	1548.8	1539.9
132.5°	1634.0	1656.9	1658.5	1647.1	1640.6
135°	1724.8	1750.2	1755.2	1752.7	1746.2
137.5°	1826.3	1846.8	1851.0	1849.3	1839.5
140°	1915.6	1936.0	1947.5	1947.5	1938.5
142.5°	2007.3	2027.7	2034.3	2036.8	2027.7
145°	2094.1	2110.4	2123.5	2126.0	2117.0
147.5°	2171.9	2192.3	2202.1	2206.2	2197.3
150°	2252.1	2266.0	2275.0	2282.3	2275.0
152.5°	2323.3	2337.2	2348.7	2357.7	2348.7
155°	2394.5	2401.0	2408.5	2419.9	2412.6
157.5°	2455.9	2460.8	2464.9	2481.3	2469.8
160°	2510.7	2515.7	2518.2	2532.0	2522.2
162.5°	2561.5	2561.5	2564.0	2579.5	2568.1
165°	2604.9	2602.4	2602.4	2618.8	2607.4
167.5°	2644.2	2636.9	2636.9	2653.2	2641.7
170°	2673.7	2667.1	2664.7	2681.0	2667.1
172.5°	2694.1	2687.6	2685.1	2701.5	2687.6
175°	2710.5	2703.9	2699.1	2715.5	2701.5
177.5°	2719.5	2713.0	2708.0	2722.0	2708.0
180°	2715.5	2715.5	2715.5	2715.5	2715.5

TEST NUMBER: P924556

CATALOG NUMBER: DFN2DIP-HX4F0-060D090US950-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.32	9.12	9.33	10.14	11.51	7.89	8.69	8.90	9.71	11.08
	3H	9.97	10.69	11.00	11.73	13.12	9.50	10.22	10.53	11.25	12.64
	4H	10.56	11.24	11.60	12.28	13.67	10.09	10.77	11.12	11.80	13.20
	6H	10.96	11.58	12.01	12.62	14.03	10.48	11.11	11.53	12.15	13.56
	8H	11.06	11.66	12.11	12.71	14.12	10.58	11.18	11.64	12.24	13.64
	12H	11.11	11.67	12.17	12.72	14.15	10.63	11.19	11.68	12.24	13.67
4H	2H	8.77	9.45	9.82	10.49	11.89	8.43	9.11	9.47	10.14	11.54
	3H	10.63	11.20	11.69	12.27	13.68	10.24	10.81	11.29	11.87	13.28
	4H	11.35	11.87	12.41	12.92	14.36	10.94	11.46	12.00	12.52	13.95
	6H	11.86	12.31	12.93	13.39	14.81	11.45	11.90	12.52	12.98	14.40
	8H	12.01	12.42	13.08	13.50	14.94	11.59	12.01	12.66	13.08	14.53
	12H	12.08	12.46	13.17	13.54	14.99	11.66	12.03	12.74	13.12	14.57
8H	4H	11.54	11.96	12.61	13.03	14.47	11.18	11.60	12.25	12.67	14.11
	6H	12.17	12.51	13.26	13.63	15.07	11.81	12.15	12.90	13.26	14.70
	8H	12.39	12.69	13.49	13.79	15.25	12.02	12.32	13.12	13.42	14.88
	12H	12.52	12.79	13.62	13.88	15.38	12.13	12.40	13.24	13.49	14.99
12H	4H	11.52	11.90	12.61	12.98	14.43	11.17	11.55	12.26	12.63	14.08
	6H	12.20	12.50	13.30	13.60	15.06	11.85	12.15	12.95	13.25	14.71
	8H	12.44	12.70	13.54	13.80	15.30	12.08	12.35	13.18	13.44	14.94

END OF REPORT