

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924575

Luminaire Tested: DFN2DIP-HX4F0-070D090US950-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924575
REPORT IS A COMBINATION OF REPORTS P899396 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-070D090US950-RLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13274.8 lumens
Efficiency: N/A
Efficacy: 113.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 117.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924575

CATALOG NUMBER: DFN2DIP-HX4F0-070D090US950-RLLFLL

Luminous Intensity Polar Plot

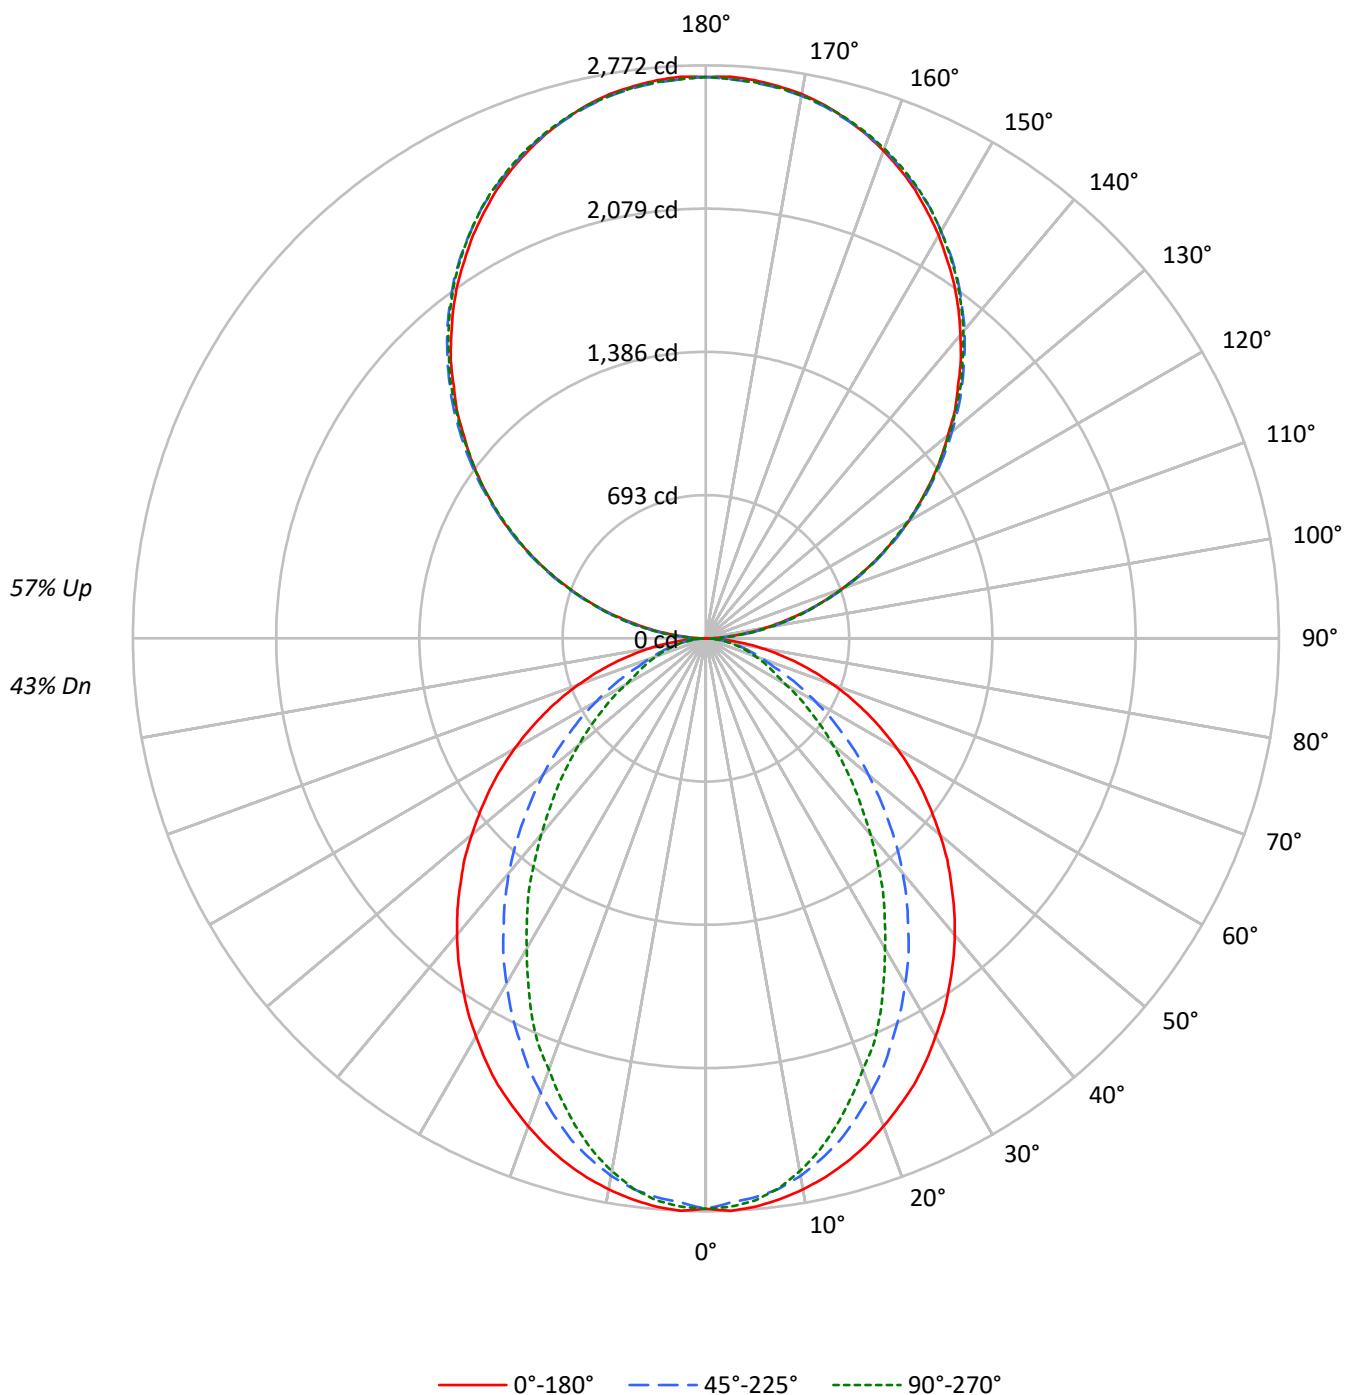

TEST NUMBER: P924575

CATALOG NUMBER: DFN2DIP-HX4F0-070D090US950-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50
1	97	92	89	85	88	85	82	79	70	68	66	57	55	54	44	43	43
2	88	81	75	70	80	74	69	65	62	58	55	50	48	46	40	38	36
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	35	33	32
4	74	64	56	50	68	59	52	47	49	44	40	40	37	34	32	30	28
5	68	57	49	43	62	52	46	41	44	39	35	36	32	30	29	26	24
6	63	51	43	38	57	47	40	35	40	35	31	33	29	26	26	24	22
7	58	46	39	33	53	43	36	31	36	31	27	30	26	23	24	21	19
8	54	42	35	29	49	39	32	28	33	28	24	28	24	21	22	19	17
9	50	38	31	26	46	36	29	25	30	25	22	25	22	19	21	18	16
10	47	35	28	24	43	33	27	22	28	23	20	23	20	17	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2052	2052	2052
5°	2056	2020	2033
10°	2035	1980	1967
15°	2008	1915	1864
20°	1971	1825	1739
25°	1933	1724	1618
30°	1882	1621	1464
35°	1832	1509	1329
40°	1782	1394	1175
45°	1723	1266	1034
50°	1662	1137	897
55°	1599	999	766
60°	1525	855	630
65°	1441	708	568
70°	1338	571	514
75°	1210	504	468
80°	1024	423	406
85°	715	284	306

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2048 cd/sqm

TEST NUMBER: P924575

CATALOG NUMBER: DFN2DIP-HX4F0-070D090US950-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	258.7	1.9
10°-20°	710.1	5.3
20°-30°	997.0	7.5
30°-40°	1086.8	8.2
40°-50°	998.8	7.5
50°-60°	784.4	5.9
60°-70°	510.6	3.8
70°-80°	262.8	2.0
80°-90°	74.8	0.6
90°-100°	168.0	1.3
100°-110°	533.9	4.0
110°-120°	913.7	6.9
120°-130°	1201.6	9.1
130°-140°	1348.7	10.2
140°-150°	1322.6	10.0
150°-160°	1109.5	8.4
160°-170°	735.8	5.5
170°-180°	257.2	1.9
0°-30°	1965.7	14.8
0°-40°	3052.5	23.0
0°-60°	4835.8	36.4
0°-90°	5684.0	42.8
90°-120°	1615.6	12.2
90°-150°	5488.5	41.3
90°-180°	7591.0	57.2
0°-180°	13274.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2760	2760	2760	2760	2760	
5°	2760	2748	2715	2738	2730	262
15°	2625	2598	2513	2465	2440	740
25°	2383	2303	2138	2036	1998	1096
35°	2053	1926	1706	1549	1494	1285
45°	1679	1511	1249	1071	1012	1296
55°	1276	1082	812	662	615	1140
65°	862	659	435	350	342	854
75°	460	285	200	182	180	486
85°	107	55	47	47	47	123
90°	2	30	80	75	78	13
95°	120	142	146	146	142	133
105°	493	499	504	508	508	520
115°	917	930	926	924	917	907
125°	1334	1354	1348	1340	1338	1192
135°	1725	1750	1755	1753	1746	1333
145°	2094	2110	2124	2126	2117	1308
155°	2394	2401	2408	2420	2413	1102
165°	2605	2602	2602	2619	2607	735
175°	2710	2704	2699	2716	2702	258
180°	2716	2716	2716	2716	2716	

TEST NUMBER: P924575

CATALOG NUMBER: DFN2DIP-HX4F0-070D090US950-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2760.0	2760.0	2760.0	2760.0	2760.0
2.5°	2772.4	2760.0	2732.4	2757.6	2752.6
5°	2760.0	2747.5	2715.0	2737.5	2730.1
7.5°	2737.5	2722.6	2687.7	2697.4	2685.0
10°	2707.5	2690.1	2640.2	2632.6	2617.7
12.5°	2670.2	2647.6	2580.1	2565.2	2537.6
15°	2625.1	2597.6	2512.7	2465.3	2440.4
17.5°	2572.7	2532.7	2427.7	2372.8	2332.8
20°	2512.7	2462.7	2337.9	2275.6	2220.4
22.5°	2447.9	2390.3	2245.3	2160.5	2123.2
25°	2382.9	2302.9	2138.0	2035.7	1998.2
27.5°	2305.5	2220.4	2038.1	1920.8	1863.3
30°	2223.1	2128.0	1928.1	1801.0	1733.4
32.5°	2143.1	2028.1	1823.5	1673.5	1610.9
35°	2053.2	1925.7	1706.1	1548.7	1493.6
37.5°	1965.8	1828.2	1596.1	1423.6	1361.4
40°	1873.3	1723.6	1481.1	1303.8	1238.9
42.5°	1778.4	1618.7	1366.3	1181.3	1119.1
45°	1678.6	1511.0	1249.0	1071.4	1011.5
47.5°	1583.6	1406.4	1136.6	959.1	904.2
50°	1478.7	1301.4	1026.6	854.1	801.9
52.5°	1376.1	1188.8	921.7	756.8	709.4
55°	1276.3	1081.5	811.7	662.0	614.6
57.5°	1174.0	974.1	714.5	574.5	534.5
60°	1069.1	869.2	611.9	484.7	444.7
62.5°	966.7	766.9	524.4	404.7	384.7
65°	861.7	659.3	434.6	349.8	342.1
67.5°	761.9	559.4	349.8	307.1	299.7
70°	656.9	462.1	289.6	264.7	254.6
72.5°	557.0	372.1	242.2	222.4	217.3
75°	459.5	284.6	199.8	182.3	179.9
77.5°	362.2	202.2	157.4	147.3	142.3
80°	272.2	144.9	119.8	110.0	110.0
82.5°	189.8	97.5	82.4	77.4	77.4
85°	107.3	54.9	47.4	47.4	47.4
87.5°	40.0	19.8	19.8	17.5	17.5
90°	2.5	29.5	80.2	75.3	77.8
92.5°	50.8	68.8	71.3	73.6	73.6
95°	119.5	142.4	146.5	146.5	142.4
97.5°	198.9	220.2	229.2	229.2	229.2
100°	290.6	309.5	316.0	316.0	313.6
102.5°	387.2	401.2	410.1	412.6	410.1
105°	492.8	499.3	504.3	508.4	508.4
107.5°	597.6	607.4	607.4	609.0	597.6
110°	699.1	712.3	712.3	712.3	705.7

TEST NUMBER: P924575

CATALOG NUMBER: DFN2DIP-HX4F0-070D090US950-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	808.8	822.7	820.2	813.8	808.8
115°	916.9	930.0	925.9	923.5	916.9
117.5°	1024.1	1042.1	1030.7	1024.1	1017.5
120°	1132.2	1150.1	1132.2	1132.2	1124.8
122.5°	1230.4	1253.4	1241.9	1235.3	1230.4
125°	1333.6	1354.0	1347.5	1340.1	1337.7
127.5°	1434.2	1459.6	1450.7	1440.8	1434.2
130°	1528.4	1557.9	1553.8	1548.8	1539.9
132.5°	1634.0	1656.9	1658.5	1647.1	1640.6
135°	1724.8	1750.2	1755.2	1752.7	1746.2
137.5°	1826.3	1846.8	1851.0	1849.3	1839.5
140°	1915.6	1936.0	1947.5	1947.5	1938.5
142.5°	2007.3	2027.7	2034.3	2036.8	2027.7
145°	2094.1	2110.4	2123.5	2126.0	2117.0
147.5°	2171.9	2192.3	2202.1	2206.2	2197.3
150°	2252.1	2266.0	2275.0	2282.3	2275.0
152.5°	2323.3	2337.2	2348.7	2357.7	2348.7
155°	2394.5	2401.0	2408.5	2419.9	2412.6
157.5°	2455.9	2460.8	2464.9	2481.3	2469.8
160°	2510.7	2515.7	2518.2	2532.0	2522.2
162.5°	2561.5	2561.5	2564.0	2579.5	2568.1
165°	2604.9	2602.4	2602.4	2618.8	2607.4
167.5°	2644.2	2636.9	2636.9	2653.2	2641.7
170°	2673.7	2667.1	2664.7	2681.0	2667.1
172.5°	2694.1	2687.6	2685.1	2701.5	2687.6
175°	2710.5	2703.9	2699.1	2715.5	2701.5
177.5°	2719.5	2713.0	2708.0	2722.0	2708.0
180°	2715.5	2715.5	2715.5	2715.5	2715.5

TEST NUMBER: P924575

CATALOG NUMBER: DFN2DIP-HX4F0-070D090US950-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.93	9.71	9.96	10.74	12.11	4.91	5.68	5.93	6.71	8.08
	3H	10.61	11.30	11.64	12.34	13.73	6.09	6.79	7.13	7.82	9.21
	4H	11.21	11.87	12.26	12.91	14.31	6.54	7.20	7.59	8.24	9.64
	6H	11.63	12.24	12.69	13.28	14.69	6.86	7.47	7.92	8.51	9.92
	8H	11.76	12.33	12.82	13.39	14.80	6.95	7.53	8.01	8.58	9.99
	12H	11.82	12.37	12.88	13.42	14.85	6.99	7.54	8.06	8.59	10.02
4H	2H	8.95	9.60	10.00	10.64	12.04	5.50	6.15	6.55	7.19	8.59
	3H	10.77	11.32	11.83	12.38	13.80	6.84	7.39	7.90	8.45	9.87
	4H	11.46	11.96	12.53	13.02	14.45	7.39	7.89	8.46	8.95	10.38
	6H	11.97	12.40	13.05	13.48	14.91	7.81	8.24	8.88	9.32	10.75
	8H	12.15	12.55	13.22	13.62	15.07	7.94	8.34	9.01	9.41	10.86
	12H	12.24	12.60	13.33	13.69	15.14	8.00	8.36	9.09	9.45	10.90
8H	4H	11.43	11.83	12.50	12.90	14.34	7.67	8.07	8.74	9.14	10.58
	6H	11.99	12.32	13.09	13.44	14.88	8.19	8.52	9.28	9.63	11.07
	8H	12.21	12.50	13.31	13.60	15.06	8.38	8.67	9.48	9.77	11.23
	12H	12.35	12.60	13.45	13.69	15.19	8.50	8.75	9.60	9.84	11.34
12H	4H	11.38	11.74	12.47	12.82	14.27	7.67	8.03	8.76	9.12	10.57
	6H	11.97	12.26	13.07	13.35	14.82	8.24	8.52	9.34	9.62	11.08
	8H	12.19	12.44	13.29	13.53	15.03	8.45	8.70	9.55	9.79	11.29