

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924585

Luminaire Tested: DFN2DIP-HX4F0-080D050US950-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P924585  
REPORT IS A COMBINATION OF REPORTS P899326 AND P896188  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-HX4F0-080D050US950-RLLFLL  
Description: 4 foot, Hexagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 10708.7 lumens  
Efficiency: N/A  
Efficacy: 101.7 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')  
CIE Type: Semi-Direct  
  
Input Watts (W): 105.3  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9613  
Total Harmonic Distortion (THDi): 0.083  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P924585  
CATALOG NUMBER: DFN2DIP-HX4F0-080D050US950-RLLFLL

### Luminous Intensity Polar Plot

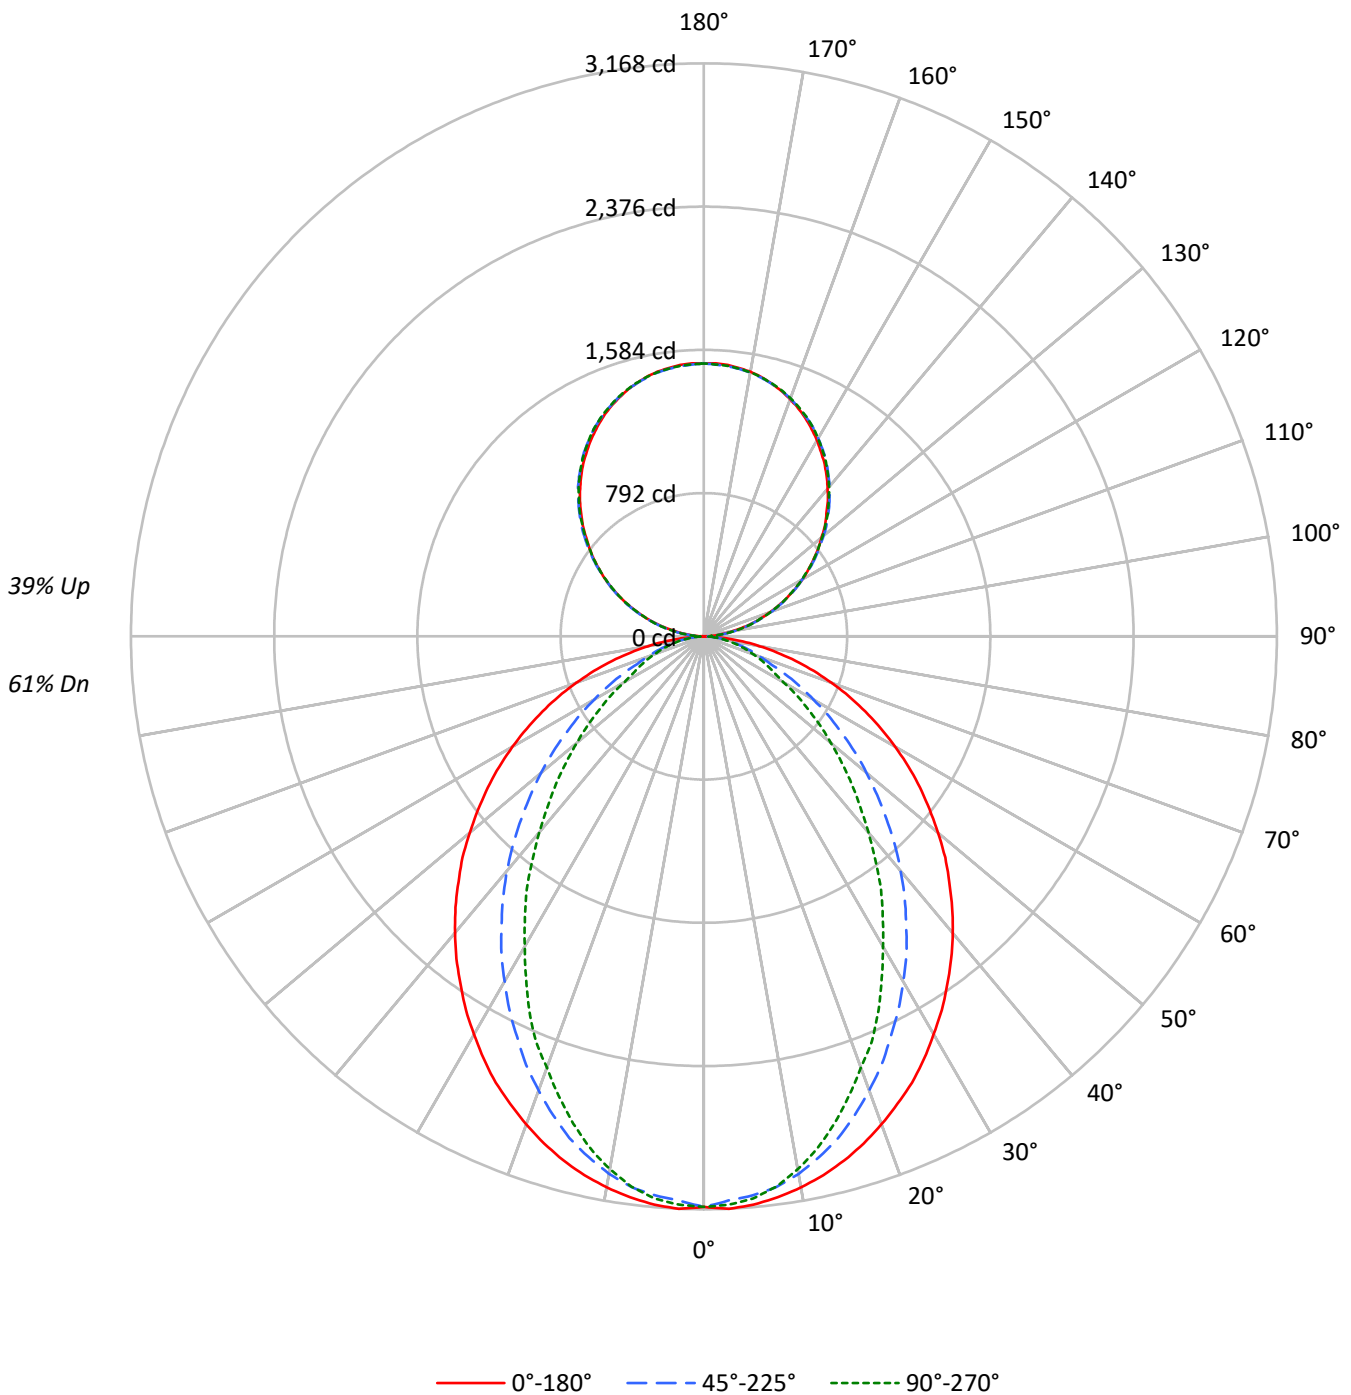



TEST NUMBER: P924585  
 CATALOG NUMBER: DFN2DIP-HX4F0-080D050US950-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	66	66	66	61
1	101	97	93	89	94	91	87	84	79	77	75	69	67	65	59	58	57	59	58	57	52
2	92	85	79	74	86	80	75	70	70	66	63	61	58	56	53	51	49	53	51	49	45
3	85	75	68	62	79	71	64	59	62	57	53	55	51	48	47	45	42	47	45	42	39
4	78	67	59	53	72	63	56	51	56	50	46	49	45	41	43	39	37	43	39	37	34
5	72	60	52	46	67	57	50	44	50	45	40	44	40	36	39	35	32	39	35	32	30
6	66	54	46	41	62	51	44	39	46	40	35	40	36	32	35	32	29	35	32	29	26
7	61	49	41	36	57	47	39	34	42	36	32	37	32	29	32	29	26	32	29	26	24
8	57	45	37	32	53	43	36	31	38	32	28	34	29	26	30	26	23	30	26	23	21
9	53	41	34	29	50	39	32	28	35	29	26	31	27	23	28	24	21	28	24	21	19
10	50	38	31	26	47	36	29	25	32	27	23	29	25	21	26	22	20	26	22	20	18

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2345	2345	2345
5°	2349	2308	2323
10°	2326	2263	2248
15°	2294	2189	2131
20°	2252	2086	1988
25°	2209	1970	1849
30°	2151	1852	1674
35°	2094	1725	1519
40°	2036	1593	1342
45°	1969	1447	1182
50°	1899	1300	1026
55°	1827	1142	875
60°	1743	977	721
65°	1646	809	648
70°	1529	653	587
75°	1383	576	535
80°	1169	484	464
85°	818	324	350

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1969 cd/sqm



TEST NUMBER: P924585

CATALOG NUMBER: DFN2DIP-HX4F0-080D050US950-RLFL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	295.6	2.8
10°-20°	811.5	7.6
20°-30°	1139.4	10.6
30°-40°	1242.0	11.6
40°-50°	1141.5	10.7
50°-60°	896.5	8.4
60°-70°	583.5	5.4
70°-80°	300.4	2.8
80°-90°	81.0	0.8
90°-100°	93.4	0.9
100°-110°	296.6	2.8
110°-120°	507.6	4.7
120°-130°	667.5	6.2
130°-140°	749.3	7.0
140°-150°	734.8	6.9
150°-160°	616.4	5.8
160°-170°	408.8	3.8
170°-180°	142.9	1.3
0°-30°	2246.6	21.0
0°-40°	3488.6	32.6
0°-60°	5526.6	51.6
0°-90°	6491.5	60.6
90°-120°	897.5	8.4
90°-150°	3049.2	28.5
90°-180°	4217.0	39.4
0°-180°	10708.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3154	3154	3154	3154	3154	
5°	3154	3140	3103	3128	3120	299
15°	3000	2969	2872	2818	2789	845
25°	2723	2632	2444	2327	2284	1252
35°	2347	2201	1950	1770	1707	1469
45°	1918	1727	1427	1224	1156	1481
55°	1459	1236	928	756	702	1303
65°	985	754	497	400	391	976
75°	525	325	228	208	206	555
85°	123	63	54	54	54	141
90°	1	16	45	42	43	10
95°	66	79	81	81	79	74
105°	274	277	280	282	282	289
115°	509	517	514	513	509	504
125°	741	752	749	744	743	662
135°	958	972	975	974	970	741
145°	1163	1172	1180	1181	1176	727
155°	1330	1334	1338	1344	1340	612
165°	1447	1446	1446	1455	1449	408
175°	1506	1502	1500	1509	1501	143
180°	1509	1509	1509	1509	1509	



TEST NUMBER: P924585

CATALOG NUMBER: DFN2DIP-HX4F0-080D050US950-RLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	3154.3	3154.3	3154.3	3154.3	3154.3
2.5°	3168.5	3154.3	3122.8	3151.5	3145.8
5°	3154.3	3140.1	3102.8	3128.5	3120.1
7.5°	3128.5	3111.6	3071.6	3082.9	3068.5
10°	3094.3	3074.4	3017.4	3008.6	2991.6
12.5°	3051.7	3025.9	2948.6	2931.6	2900.2
15°	3000.1	2968.7	2871.7	2817.5	2789.0
17.5°	2940.1	2894.4	2774.5	2711.8	2666.0
20°	2871.7	2814.5	2671.9	2600.7	2537.6
22.5°	2797.5	2731.8	2566.2	2469.2	2426.5
25°	2723.3	2631.9	2443.5	2326.6	2283.6
27.5°	2634.9	2537.6	2329.3	2195.2	2129.4
30°	2540.7	2431.9	2203.6	2058.3	1981.0
32.5°	2449.2	2317.8	2084.0	1912.6	1841.1
35°	2346.6	2200.9	1949.8	1770.0	1706.9
37.5°	2246.6	2089.5	1824.1	1627.0	1555.8
40°	2141.0	1969.8	1692.7	1490.1	1415.8
42.5°	2032.5	1849.9	1561.5	1350.2	1278.9
45°	1918.3	1726.9	1427.4	1224.5	1156.1
47.5°	1809.9	1607.3	1299.0	1096.1	1033.4
50°	1689.9	1487.4	1173.3	976.1	916.4
52.5°	1572.8	1358.6	1053.3	865.0	810.8
55°	1458.6	1236.0	927.7	756.5	702.3
57.5°	1341.7	1113.3	816.5	656.6	610.8
60°	1221.7	993.4	699.3	553.9	508.2
62.5°	1104.8	876.4	599.4	462.5	439.8
65°	984.9	753.5	496.7	399.8	390.9
67.5°	870.7	639.4	399.8	351.0	342.6
70°	750.8	528.2	331.0	302.5	291.1
72.5°	636.6	425.2	276.9	254.1	248.3
75°	525.2	325.3	228.4	208.4	205.7
77.5°	414.0	231.1	179.9	168.4	162.7
80°	311.0	165.7	136.9	125.6	125.6
82.5°	216.8	111.4	94.2	88.4	88.4
85°	122.7	62.7	54.2	54.2	54.2
87.5°	45.7	22.7	22.7	20.0	20.0
90°	1.3	16.4	44.6	41.9	43.2
92.5°	28.2	38.2	39.6	40.9	40.9
95°	66.4	79.2	81.4	81.4	79.2
97.5°	110.5	122.3	127.4	127.4	127.4
100°	161.4	171.9	175.5	175.5	174.2
102.5°	215.1	222.9	227.8	229.2	227.8
105°	273.8	277.4	280.2	282.4	282.4
107.5°	332.0	337.4	337.4	338.4	332.0
110°	388.4	395.7	395.7	395.7	392.0



TEST NUMBER: P924585

CATALOG NUMBER: DFN2DIP-HX4F0-080D050US950-RLFL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	449.3	457.1	455.7	452.1	449.3
115°	509.3	516.7	514.4	513.1	509.3
117.5°	569.0	579.0	572.6	569.0	565.3
120°	629.0	639.0	629.0	629.0	624.9
122.5°	683.5	696.3	689.9	686.3	683.5
125°	740.9	752.2	748.6	744.5	743.2
127.5°	796.8	810.9	805.9	800.4	796.8
130°	849.2	865.5	863.2	860.5	855.5
132.5°	907.8	920.5	921.5	915.1	911.5
135°	958.3	972.3	975.1	973.7	970.1
137.5°	1014.7	1026.0	1028.3	1027.4	1021.9
140°	1064.2	1075.6	1081.9	1081.9	1077.0
142.5°	1115.1	1126.6	1130.2	1131.5	1126.6
145°	1163.4	1172.5	1179.7	1181.1	1176.1
147.5°	1206.6	1218.0	1223.4	1225.7	1220.6
150°	1251.2	1258.9	1263.9	1268.0	1263.9
152.5°	1290.8	1298.5	1304.8	1309.8	1304.8
155°	1330.3	1333.9	1338.0	1344.4	1340.3
157.5°	1364.4	1367.1	1369.4	1378.5	1372.1
160°	1394.8	1397.6	1398.9	1406.7	1401.2
162.5°	1423.1	1423.1	1424.4	1433.1	1426.7
165°	1447.2	1445.8	1445.8	1454.9	1448.6
167.5°	1469.0	1464.9	1464.9	1474.0	1467.6
170°	1485.4	1481.8	1480.4	1489.5	1481.8
172.5°	1496.7	1493.1	1491.8	1500.8	1493.1
175°	1505.9	1502.2	1499.5	1508.6	1500.8
177.5°	1510.8	1507.2	1504.5	1512.2	1504.5
180°	1508.6	1508.6	1508.6	1508.6	1508.6



TEST NUMBER: P924585  
 CATALOG NUMBER: DFN2DIP-HX4F0-080D050US950-RLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.05	11.97	11.91	12.86	13.97	7.02	7.94	7.89	8.83	9.94
	3H	12.73	13.56	13.61	14.45	15.59	8.22	9.04	9.10	9.94	11.08
	4H	13.35	14.13	14.24	15.03	16.18	8.67	9.45	9.57	10.35	11.50
	6H	13.77	14.49	14.68	15.40	16.56	9.00	9.72	9.91	10.63	11.79
	8H	13.90	14.59	14.82	15.51	16.67	9.09	9.78	10.01	10.70	11.86
	12H	13.97	14.62	14.89	15.54	16.72	9.14	9.79	10.06	10.71	11.90
4H	2H	11.08	11.86	11.98	12.76	13.91	7.63	8.41	8.53	9.31	10.46
	3H	12.92	13.56	13.83	14.49	15.66	8.99	9.64	9.90	10.57	11.73
	4H	13.61	14.20	14.53	15.13	16.32	9.54	10.13	10.46	11.06	12.25
	6H	14.13	14.64	15.07	15.59	16.78	9.97	10.48	10.90	11.43	12.62
	8H	14.31	14.79	15.25	15.73	16.94	10.10	10.57	11.04	11.52	12.72
	12H	14.41	14.84	15.37	15.80	17.01	10.17	10.60	11.13	11.56	12.77
8H	4H	13.59	14.06	14.53	15.01	16.21	9.83	10.30	10.77	11.25	12.45
	6H	14.16	14.55	15.12	15.54	16.74	10.35	10.74	11.32	11.73	12.93
	8H	14.38	14.72	15.35	15.70	16.92	10.55	10.89	11.52	11.87	13.09
	12H	14.52	14.82	15.50	15.79	17.06	10.67	10.98	11.65	11.94	13.21
12H	4H	13.54	13.97	14.50	14.93	16.14	9.84	10.27	10.80	11.23	12.44
	6H	14.13	14.48	15.11	15.46	16.68	10.40	10.75	11.38	11.73	12.95
	8H	14.36	14.66	15.34	15.63	16.90	10.62	10.92	11.59	11.89	13.16