

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924602

Luminaire Tested: DFN2DIP-HX4F0-090D050US950-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924602
REPORT IS A COMBINATION OF REPORTS P899327 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-090D050US950-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12721.6 lumens
Efficiency: N/A
Efficacy: 108.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 117.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9821
Total Harmonic Distortion (THDi): 0.08
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924602

CATALOG NUMBER: DFN2DIP-HX4F0-090D050US950-FLLFLL

Luminous Intensity Polar Plot

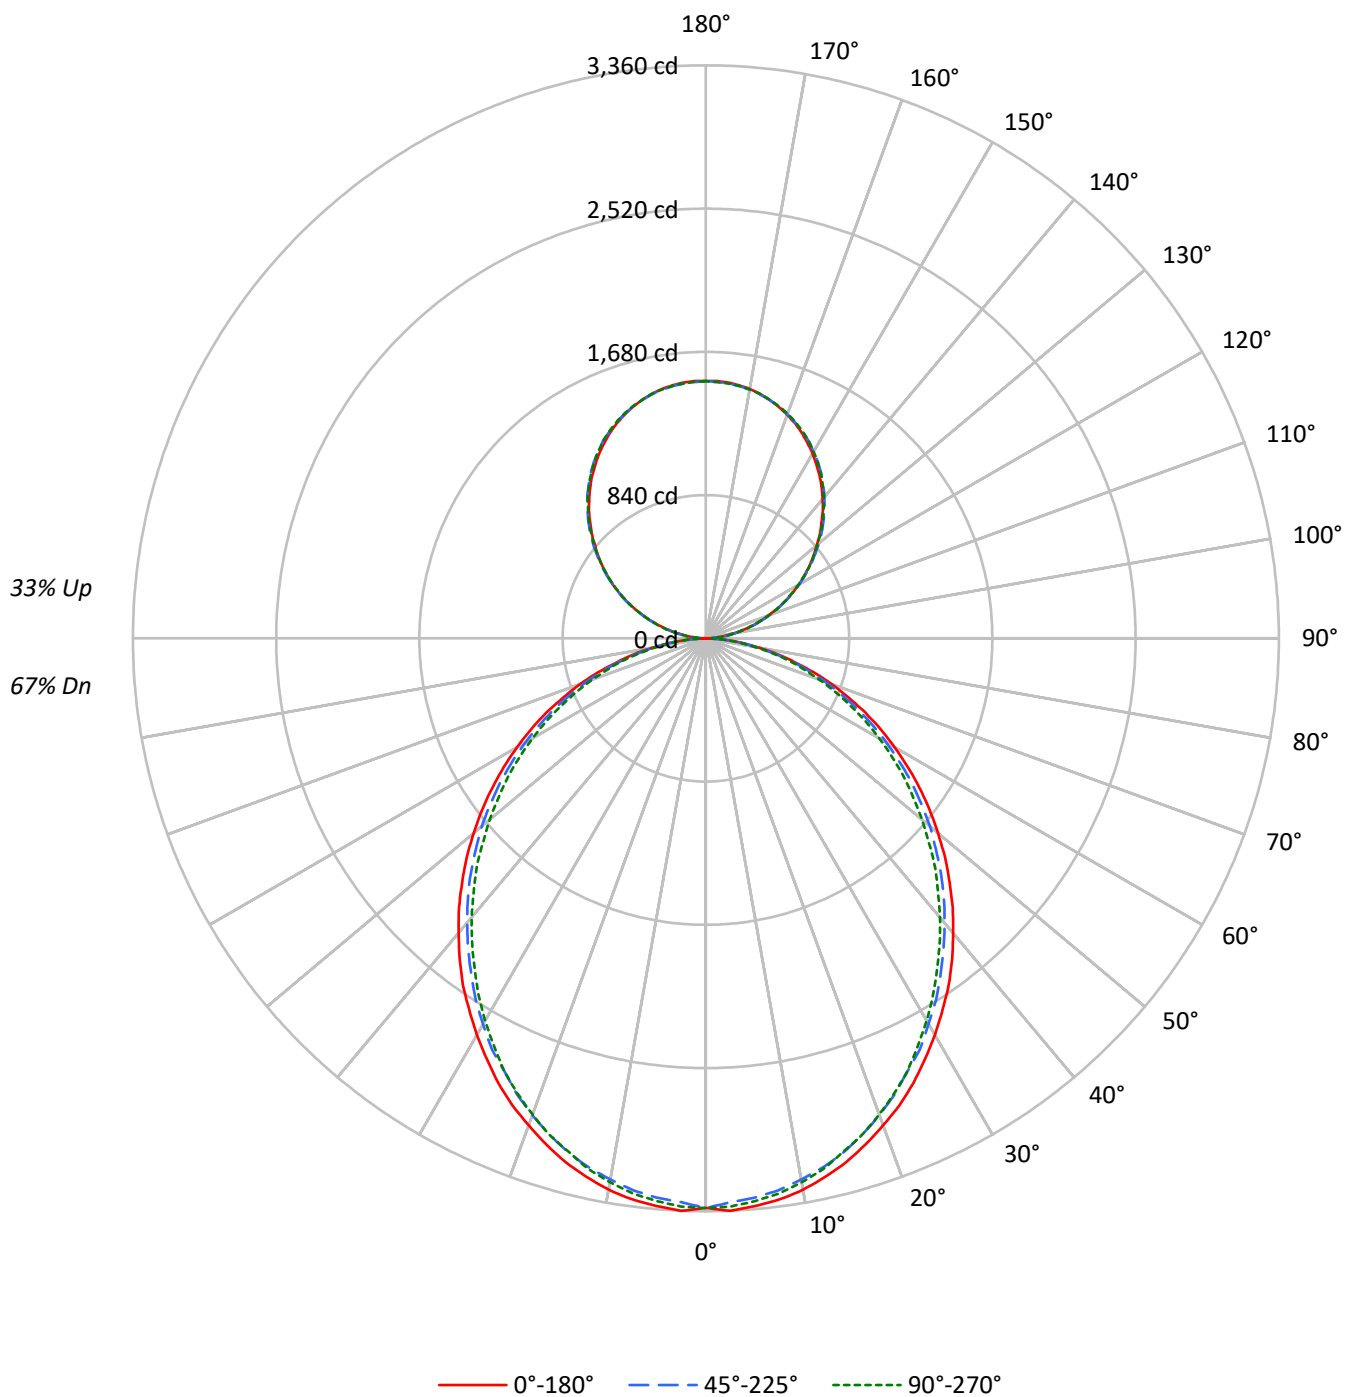

TEST NUMBER: P924602

CATALOG NUMBER: DFN2DIP-HX4F0-090D050US950-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72
1	102	97	93	90	96	92	88	85	81	79	76	72	70	68	63	62	61
2	93	85	79	73	87	80	75	70	71	67	63	63	60	57	56	53	51
3	84	75	67	61	79	71	64	58	63	58	53	56	52	48	49	46	43
4	77	66	58	52	73	63	55	50	56	50	45	50	45	41	44	41	37
5	71	59	51	45	67	56	48	43	50	44	39	45	40	36	40	36	33
6	66	53	45	39	62	50	43	37	45	39	34	41	35	32	36	32	29
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	26
8	56	44	36	30	53	42	34	29	38	32	27	34	29	25	30	26	23
9	53	40	32	27	50	38	31	26	35	29	24	31	26	23	28	24	21
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2484	2484	2484
5°	2488	2450	2466
10°	2468	2417	2433
15°	2432	2377	2381
20°	2383	2322	2328
25°	2335	2257	2266
30°	2274	2195	2187
35°	2216	2123	2105
40°	2145	2050	2026
45°	2074	1977	1945
50°	1997	1900	1851
55°	1916	1811	1766
60°	1824	1705	1667
65°	1724	1596	1551
70°	1597	1463	1426
75°	1421	1304	1311
80°	1209	1101	1091
85°	877	751	726

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2074 cd/sqm

TEST NUMBER: P924602

CATALOG NUMBER: DFN2DIP-HX4F0-090D050US950-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	314.4	2.5
10°-20°	884.7	7.0
20°-30°	1300.2	10.2
30°-40°	1510.1	11.9
40°-50°	1508.2	11.9
50°-60°	1315.1	10.3
60°-70°	972.2	7.6
70°-80°	550.0	4.3
80°-90°	149.5	1.2
90°-100°	93.4	0.7
100°-110°	296.6	2.3
110°-120°	507.6	4.0
120°-130°	667.5	5.2
130°-140°	749.3	5.9
140°-150°	734.8	5.8
150°-160°	616.4	4.8
160°-170°	408.8	3.2
170°-180°	142.9	1.1
0°-30°	2499.3	19.6
0°-40°	4009.4	31.5
0°-60°	6832.8	53.7
0°-90°	8504.5	66.9
90°-120°	897.5	7.1
90°-150°	3049.2	24.0
90°-180°	4217.0	33.1
0°-180°	12721.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3341	3341	3341	3341	3341	
5°	3341	3328	3293	3318	3312	317
15°	3180	3161	3119	3132	3116	896
25°	2878	2853	2798	2804	2798	1324
35°	2483	2451	2400	2380	2364	1551
45°	2021	1998	1950	1915	1902	1560
55°	1529	1510	1471	1433	1417	1367
65°	1031	1012	980	951	935	1020
75°	540	533	517	498	504	576
85°	132	128	126	116	112	147
90°	1	16	45	42	43	12
95°	66	79	81	81	79	74
105°	274	277	280	282	282	289
115°	509	517	514	513	509	504
125°	741	752	749	744	743	662
135°	958	972	975	974	970	741
145°	1163	1172	1180	1181	1176	727
155°	1330	1334	1338	1344	1340	612
165°	1447	1446	1446	1455	1449	408
175°	1506	1502	1500	1509	1501	143
180°	1509	1509	1509	1509	1509	

TEST NUMBER: P924602

CATALOG NUMBER: DFN2DIP-HX4F0-090D050US950-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3340.8	3340.8	3340.8	3340.8	3340.8
2.5°	3360.3	3344.2	3308.9	3340.8	3334.7
5°	3340.8	3328.2	3292.8	3318.4	3312.2
7.5°	3318.4	3299.3	3263.8	3289.8	3283.3
10°	3283.3	3260.8	3222.2	3247.8	3238.3
12.5°	3234.8	3215.7	3177.3	3193.2	3186.8
15°	3180.3	3161.3	3119.3	3132.3	3116.2
17.5°	3112.8	3093.7	3051.8	3067.9	3051.8
20°	3038.9	3019.8	2974.8	2984.3	2971.7
22.5°	2965.2	2936.3	2894.3	2894.3	2887.9
25°	2878.3	2852.7	2798.3	2804.4	2798.3
27.5°	2781.9	2759.3	2717.9	2708.3	2692.3
30°	2685.8	2659.8	2611.8	2602.2	2589.3
32.5°	2582.9	2563.8	2512.3	2492.9	2479.9
35°	2483.4	2451.3	2399.8	2380.4	2364.4
37.5°	2370.9	2341.9	2290.4	2267.9	2251.9
40°	2255.3	2229.4	2177.9	2149.3	2136.4
42.5°	2142.8	2116.9	2065.8	2033.5	2014.4
45°	2020.8	1998.3	1949.9	1914.8	1901.9
47.5°	1901.9	1879.4	1827.9	1792.5	1773.4
50°	1776.4	1760.4	1715.4	1670.5	1654.4
52.5°	1654.4	1631.9	1590.3	1554.9	1532.4
55°	1529.4	1509.9	1471.4	1432.9	1416.9
57.5°	1403.9	1387.9	1346.0	1307.5	1294.5
60°	1278.5	1265.9	1220.8	1185.4	1175.9
62.5°	1156.4	1133.9	1101.9	1069.9	1056.9
65°	1031.4	1011.9	979.9	950.9	934.9
67.5°	902.9	886.6	857.8	835.4	822.4
70°	783.9	770.9	742.0	719.5	706.9
72.5°	661.9	648.9	632.9	610.5	600.9
75°	539.6	533.4	517.1	498.0	504.5
77.5°	430.4	417.6	411.1	401.5	392.0
80°	321.4	318.0	311.5	301.9	295.5
82.5°	218.5	218.5	215.4	202.4	202.4
85°	131.6	128.5	125.5	115.5	112.5
87.5°	57.9	51.4	45.0	35.5	32.1
90°	1.3	16.4	44.6	41.9	43.2
92.5°	28.2	38.2	39.6	40.9	40.9
95°	66.4	79.2	81.4	81.4	79.2
97.5°	110.5	122.3	127.4	127.4	127.4
100°	161.4	171.9	175.5	175.5	174.2
102.5°	215.1	222.9	227.8	229.2	227.8
105°	273.8	277.4	280.2	282.4	282.4
107.5°	332.0	337.4	337.4	338.4	332.0
110°	388.4	395.7	395.7	395.7	392.0



TEST NUMBER: P924602

CATALOG NUMBER: DFN2DIP-HX4F0-090D050US950-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	449.3	457.1	455.7	452.1	449.3
115°	509.3	516.7	514.4	513.1	509.3
117.5°	569.0	579.0	572.6	569.0	565.3
120°	629.0	639.0	629.0	629.0	624.9
122.5°	683.5	696.3	689.9	686.3	683.5
125°	740.9	752.2	748.6	744.5	743.2
127.5°	796.8	810.9	805.9	800.4	796.8
130°	849.2	865.5	863.2	860.5	855.5
132.5°	907.8	920.5	921.5	915.1	911.5
135°	958.3	972.3	975.1	973.7	970.1
137.5°	1014.7	1026.0	1028.3	1027.4	1021.9
140°	1064.2	1075.6	1081.9	1081.9	1077.0
142.5°	1115.1	1126.6	1130.2	1131.5	1126.6
145°	1163.4	1172.5	1179.7	1181.1	1176.1
147.5°	1206.6	1218.0	1223.4	1225.7	1220.6
150°	1251.2	1258.9	1263.9	1268.0	1263.9
152.5°	1290.8	1298.5	1304.8	1309.8	1304.8
155°	1330.3	1333.9	1338.0	1344.4	1340.3
157.5°	1364.4	1367.1	1369.4	1378.5	1372.1
160°	1394.8	1397.6	1398.9	1406.7	1401.2
162.5°	1423.1	1423.1	1424.4	1433.1	1426.7
165°	1447.2	1445.8	1445.8	1454.9	1448.6
167.5°	1469.0	1464.9	1464.9	1474.0	1467.6
170°	1485.4	1481.8	1480.4	1489.5	1481.8
172.5°	1496.7	1493.1	1491.8	1500.8	1493.1
175°	1505.9	1502.2	1499.5	1508.6	1500.8
177.5°	1510.8	1507.2	1504.5	1512.2	1504.5
180°	1508.6	1508.6	1508.6	1508.6	1508.6

TEST NUMBER: P924602

CATALOG NUMBER: DFN2DIP-HX4F0-090D050US950-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.86	12.90	12.66	13.72	14.72	11.43	12.46	12.22	13.28	14.29
	3H	13.53	14.46	14.34	15.29	16.33	13.06	13.99	13.87	14.82	15.86
	4H	14.13	15.01	14.96	15.85	16.89	13.66	14.54	14.48	15.37	16.42
	6H	14.54	15.35	15.38	16.20	17.26	14.06	14.87	14.90	15.72	16.78
	8H	14.65	15.42	15.50	16.29	17.35	14.17	14.95	15.02	15.81	16.87
	12H	14.70	15.44	15.56	16.30	17.39	14.22	14.96	15.08	15.82	16.91
4H	2H	12.34	13.22	13.17	14.06	15.11	12.00	12.88	12.83	13.71	14.76
	3H	14.22	14.96	15.07	15.83	16.89	13.83	14.57	14.68	15.44	16.50
	4H	14.95	15.62	15.80	16.48	17.58	14.54	15.21	15.40	16.08	17.17
	6H	15.47	16.05	16.35	16.94	18.04	15.06	15.64	15.94	16.53	17.63
	8H	15.63	16.17	16.50	17.06	18.16	15.22	15.76	16.09	16.64	17.75
	12H	15.71	16.20	16.61	17.10	18.22	15.29	15.77	16.18	16.68	17.79
8H	4H	15.16	15.70	16.03	16.59	17.69	14.80	15.34	15.67	16.23	17.33
	6H	15.80	16.25	16.70	17.18	18.28	15.44	15.88	16.34	16.81	17.92
	8H	16.02	16.42	16.94	17.34	18.47	15.65	16.05	16.57	16.97	18.10
	12H	16.16	16.51	17.08	17.43	18.60	15.78	16.13	16.69	17.04	18.22
12H	4H	15.15	15.64	16.05	16.55	17.66	14.80	15.29	15.70	16.19	17.31
	6H	15.83	16.23	16.74	17.15	18.27	15.48	15.88	16.39	16.80	17.92
	8H	16.08	16.43	17.00	17.35	18.52	15.72	16.07	16.64	16.99	18.16