

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924670

Luminaire Tested: DFN2DIP-HX4F0-120D120US950-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924670
REPORT IS A COMBINATION OF REPORTS P899459 AND P896188
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-HX4F0-120D120US950-FLLFLL
Description: 4 foot, Hexagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 21465.0 lumens
Efficiency: N/A
Efficacy: 107.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.54' x L: 4.09' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 199.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924670

CATALOG NUMBER: DFN2DIP-HX4F0-120D120US950-FLLFLL

Luminous Intensity Polar Plot

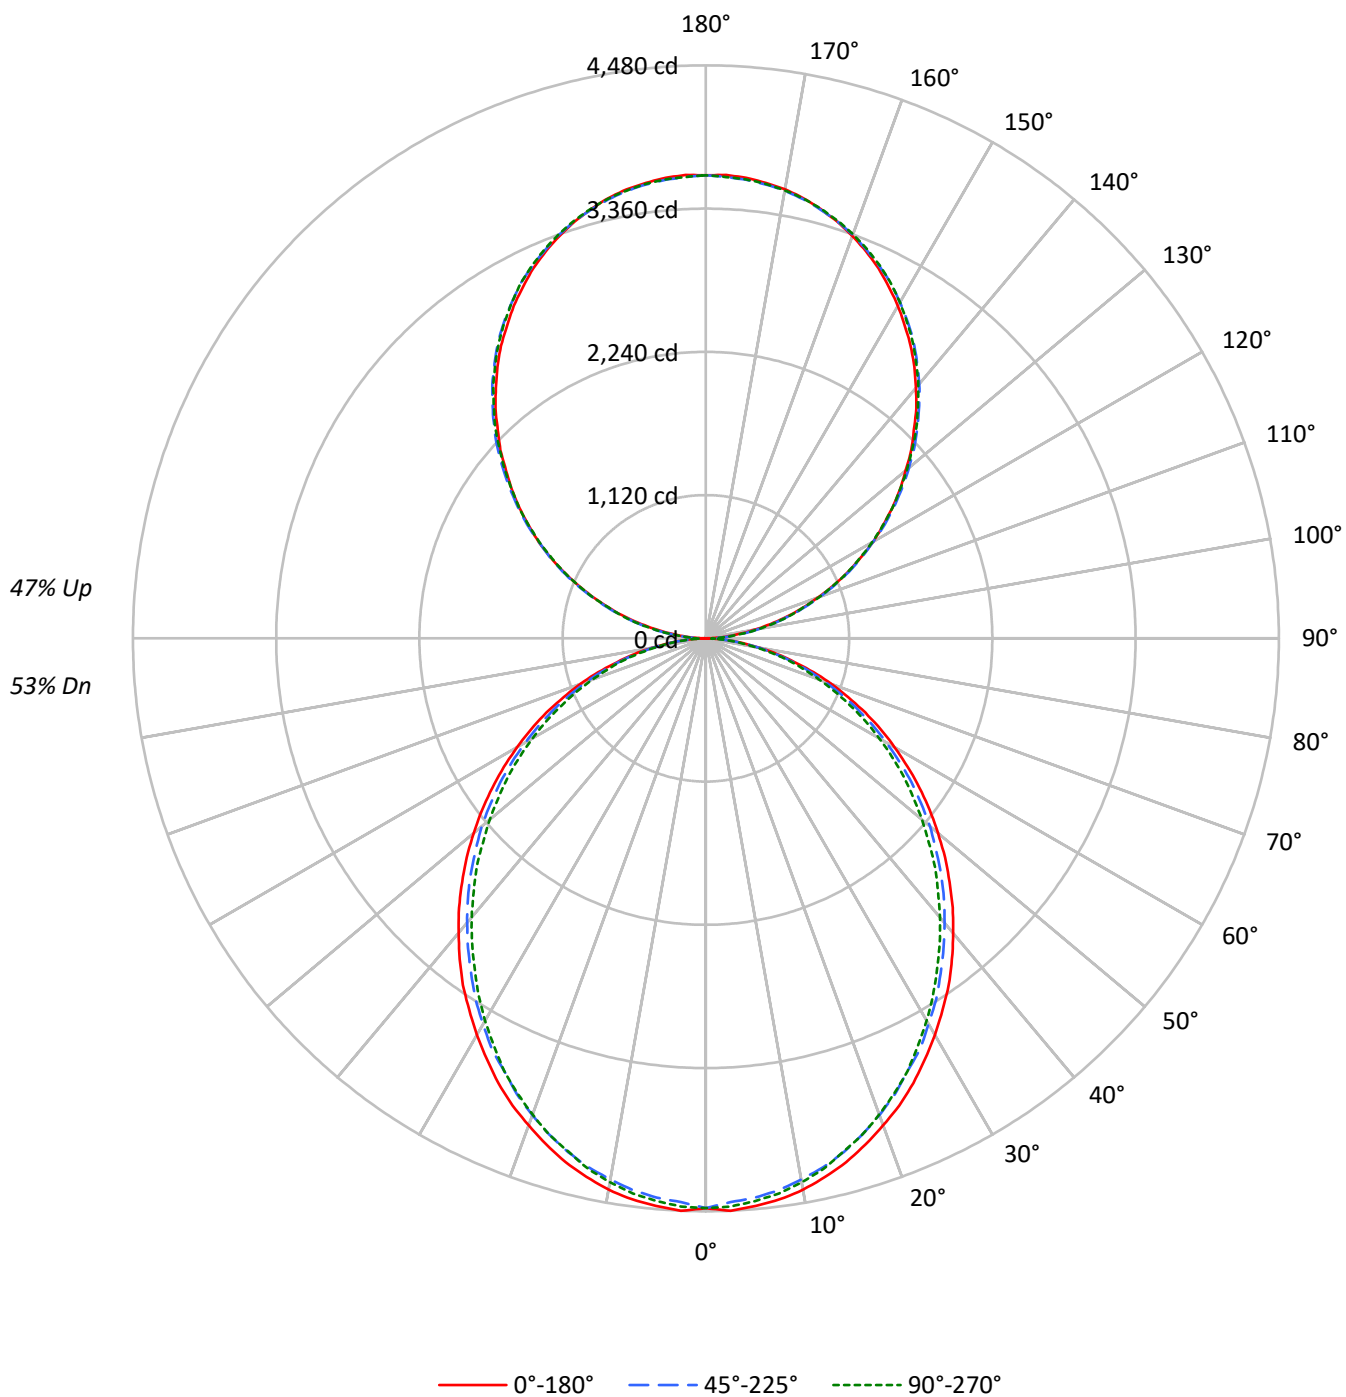

TEST NUMBER: P924670

CATALOG NUMBER: DFN2DIP-HX4F0-120D120US950-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85		71	71	71		59
1	98	94	90	87	91	87	84	81	74	72	70		63	61	59		52
2	90	82	76	71	83	76	71	66	65	61	58		55	52	50		46
3	82	72	65	59	75	67	61	55	58	53	49		49	45	42		41
4	75	64	56	50	69	60	52	47	51	46	41		43	39	36		36
5	69	57	49	43	63	53	46	40	46	40	36		39	35	31		33
6	63	51	43	37	58	48	40	35	41	36	31		35	31	27		30
7	59	46	38	33	54	43	36	31	37	32	28		32	28	24		27
8	54	42	34	29	50	39	32	27	34	29	24		29	25	22		25
9	51	38	31	26	47	36	29	24	31	26	22		27	23	19		23
10	47	35	28	23	44	33	26	22	29	23	20		25	21	18		21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3312	3312	3312
5°	3318	3266	3288
10°	3291	3223	3244
15°	3243	3170	3174
20°	3178	3097	3103
25°	3113	3009	3021
30°	3032	2927	2917
35°	2955	2831	2806
40°	2860	2733	2701
45°	2766	2636	2593
50°	2662	2533	2469
55°	2554	2415	2354
60°	2432	2274	2223
65°	2299	2129	2068
70°	2129	1951	1902
75°	1894	1739	1748
80°	1611	1468	1454
85°	1169	1000	967

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2766 cd/sqm

TEST NUMBER: P924670

CATALOG NUMBER: DFN2DIP-HX4F0-120D120US950-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	419.3	2.0
10°-20°	1179.6	5.5
20°-30°	1733.6	8.1
30°-40°	2013.5	9.4
40°-50°	2011.0	9.4
50°-60°	1753.5	8.2
60°-70°	1296.2	6.0
70°-80°	733.4	3.4
80°-90°	203.9	0.9
90°-100°	224.0	1.0
100°-110°	711.8	3.3
110°-120°	1218.2	5.7
120°-130°	1602.1	7.5
130°-140°	1798.3	8.4
140°-150°	1763.5	8.2
150°-160°	1479.3	6.9
160°-170°	981.0	4.6
170°-180°	342.9	1.6
0°-30°	3332.5	15.5
0°-40°	5345.9	24.9
0°-60°	9110.4	42.4
0°-90°	11343.8	52.8
90°-120°	2154.1	10.0
90°-150°	7318.0	34.1
90°-180°	10121.0	47.2
0°-180°	21465.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4454	4454	4454	4454	4454	
5°	4454	4438	4390	4424	4416	423
15°	4240	4215	4159	4176	4155	1194
25°	3838	3804	3731	3739	3731	1766
35°	3311	3268	3200	3174	3152	2068
45°	2694	2664	2600	2553	2536	2079
55°	2039	2013	1962	1910	1889	1823
65°	1375	1349	1306	1268	1247	1360
75°	719	711	689	664	673	768
85°	175	171	167	154	150	196
90°	3	39	107	100	104	21
95°	159	190	195	195	190	177
105°	657	666	672	678	678	693
115°	1222	1240	1234	1231	1222	1209
125°	1778	1805	1797	1787	1784	1589
135°	2300	2334	2340	2337	2328	1778
145°	2792	2814	2831	2835	2823	1745
155°	3193	3201	3211	3226	3217	1470
165°	3473	3470	3470	3492	3476	980
175°	3614	3605	3599	3620	3602	343
180°	3620	3620	3620	3620	3620	

TEST NUMBER: P924670

CATALOG NUMBER: DFN2DIP-HX4F0-120D120US950-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4454.5	4454.5	4454.5	4454.5	4454.5
2.5°	4480.4	4459.0	4411.8	4454.5	4446.3
5°	4454.5	4437.6	4390.4	4424.5	4416.3
7.5°	4424.5	4399.0	4351.8	4386.3	4377.7
10°	4377.7	4347.7	4296.3	4330.4	4317.7
12.5°	4313.1	4287.7	4236.3	4257.7	4249.0
15°	4240.4	4215.0	4159.1	4176.3	4155.0
17.5°	4150.5	4125.0	4069.1	4090.5	4069.1
20°	4051.8	4026.4	3966.4	3979.1	3962.3
22.5°	3953.7	3915.0	3859.1	3859.1	3850.5
25°	3837.8	3803.7	3731.0	3739.2	3731.0
27.5°	3709.2	3679.2	3623.8	3611.0	3589.7
30°	3581.0	3546.5	3482.4	3469.7	3452.4
32.5°	3443.7	3418.4	3349.7	3323.8	3306.6
35°	3311.0	3268.4	3199.7	3173.9	3152.5
37.5°	3161.1	3122.5	3053.8	3023.9	3002.5
40°	3007.1	2972.6	2903.9	2865.7	2848.5
42.5°	2857.1	2822.6	2754.4	2711.3	2685.8
45°	2694.4	2664.4	2599.8	2553.1	2535.8
47.5°	2535.8	2505.8	2437.2	2390.0	2364.5
50°	2368.6	2347.2	2287.2	2227.2	2205.8
52.5°	2205.8	2175.9	2120.5	2073.1	2043.2
55°	2039.1	2013.2	1961.8	1910.5	1889.1
57.5°	1871.8	1850.5	1794.6	1743.2	1726.0
60°	1704.6	1687.8	1627.8	1580.6	1567.8
62.5°	1542.0	1511.9	1469.3	1426.5	1409.2
65°	1375.2	1349.2	1306.5	1267.9	1246.6
67.5°	1203.9	1182.0	1143.8	1113.9	1096.6
70°	1045.2	1027.9	989.3	959.3	942.6
72.5°	882.5	865.3	843.9	814.0	801.2
75°	719.4	711.2	689.4	664.0	672.6
77.5°	573.9	556.7	548.1	535.3	522.6
80°	428.5	424.0	415.4	402.7	394.0
82.5°	291.3	291.3	287.2	270.0	270.0
85°	175.4	171.3	167.2	154.1	150.0
87.5°	77.3	68.6	60.0	47.2	42.7
90°	3.2	39.3	106.9	100.5	103.7
92.5°	67.6	91.7	94.9	98.3	98.3
95°	159.3	189.9	195.4	195.4	189.9
97.5°	265.2	293.6	305.7	305.7	305.7
100°	387.5	412.6	421.3	421.3	418.0
102.5°	516.3	534.8	546.8	550.2	546.8
105°	657.1	665.8	672.4	677.8	677.8
107.5°	796.8	809.9	809.9	812.0	796.8
110°	932.2	949.6	949.6	949.6	940.9



TEST NUMBER: P924670

CATALOG NUMBER: DFN2DIP-HX4F0-120D120US950-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1078.4	1097.0	1093.7	1085.0	1078.4
115°	1222.5	1240.0	1234.5	1231.2	1222.5
117.5°	1365.5	1389.5	1374.2	1365.5	1356.8
120°	1509.6	1533.6	1509.6	1509.6	1499.8
122.5°	1640.6	1671.1	1655.9	1647.1	1640.6
125°	1778.1	1805.3	1796.7	1786.8	1783.5
127.5°	1912.4	1946.2	1934.1	1921.1	1912.4
130°	2037.8	2077.1	2071.7	2065.1	2053.1
132.5°	2178.6	2209.3	2211.4	2196.1	2187.4
135°	2299.8	2333.7	2340.3	2336.9	2328.2
137.5°	2435.2	2462.5	2467.9	2465.7	2452.6
140°	2554.1	2581.4	2596.7	2596.7	2584.7
142.5°	2676.4	2703.7	2712.4	2715.7	2703.7
145°	2792.1	2813.9	2831.4	2834.7	2822.7
147.5°	2895.8	2923.1	2936.2	2941.7	2929.6
150°	3002.8	3021.3	3033.3	3043.2	3033.3
152.5°	3097.7	3116.2	3131.6	3143.6	3131.6
155°	3192.7	3201.4	3211.3	3226.5	3216.7
157.5°	3274.6	3281.1	3286.5	3308.4	3293.1
160°	3347.7	3354.3	3357.5	3376.1	3362.9
162.5°	3415.3	3415.3	3418.7	3439.4	3424.1
165°	3473.2	3470.0	3470.0	3491.7	3476.5
167.5°	3525.6	3515.8	3515.8	3537.6	3522.4
170°	3564.9	3556.1	3552.9	3574.7	3556.1
172.5°	3592.2	3583.4	3580.2	3602.0	3583.4
175°	3614.0	3605.3	3598.8	3620.5	3602.0
177.5°	3626.1	3617.3	3610.7	3629.3	3610.7
180°	3620.5	3620.5	3620.5	3620.5	3620.5

TEST NUMBER: P924670

CATALOG NUMBER: DFN2DIP-HX4F0-120D120US950-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.69	12.58	12.62	13.53	14.76	11.26	12.15	12.19	13.10	14.33
	3H	13.36	14.15	14.30	15.11	16.36	12.88	13.68	13.83	14.64	15.89
	4H	13.94	14.70	14.90	15.66	16.92	13.47	14.22	14.43	15.19	16.45
	6H	14.35	15.04	15.32	16.01	17.28	13.87	14.57	14.84	15.53	16.81
	8H	14.45	15.11	15.43	16.10	17.37	13.98	14.64	14.95	15.62	16.90
	12H	14.50	15.13	15.48	16.11	17.41	14.02	14.65	15.00	15.63	16.93
4H	2H	12.16	12.91	13.12	13.87	15.14	11.81	12.57	12.78	13.53	14.79
	3H	14.03	14.66	15.00	15.65	16.93	13.63	14.26	14.61	15.26	16.53
	4H	14.74	15.32	15.73	16.30	17.60	14.34	14.91	15.32	15.90	17.20
	6H	15.26	15.76	16.26	16.77	18.06	14.85	15.35	15.85	16.36	17.65
	8H	15.41	15.87	16.41	16.88	18.19	15.00	15.46	16.00	16.47	17.78
	12H	15.49	15.90	16.50	16.92	18.24	15.06	15.48	16.08	16.50	17.82
8H	4H	14.94	15.41	15.94	16.41	17.72	14.58	15.04	15.58	16.05	17.36
	6H	15.58	15.96	16.60	17.00	18.32	15.21	15.60	16.23	16.64	17.95
	8H	15.80	16.14	16.83	17.17	18.50	15.43	15.77	16.46	16.80	18.13
	12H	15.93	16.23	16.96	17.25	18.63	15.55	15.84	16.58	16.87	18.24
12H	4H	14.93	15.35	15.94	16.37	17.69	14.58	15.00	15.59	16.01	17.33
	6H	15.61	15.94	16.64	16.98	18.31	15.25	15.59	16.28	16.62	17.95
	8H	15.85	16.15	16.88	17.17	18.55	15.49	15.79	16.53	16.82	18.19