

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902874

Luminaire Tested: DFN2DIP-PN2F0-030D030US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902874
REPORT IS A COMBINATION OF REPORTS P899474 AND P896349
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-030D030US830-RLLFLL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4905.9 lumens
Efficiency: N/A
Efficacy: 105.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 46.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902874

CATALOG NUMBER: DFN2DIP-PN2F0-030D030US830-RLLFLL

Luminous Intensity Polar Plot

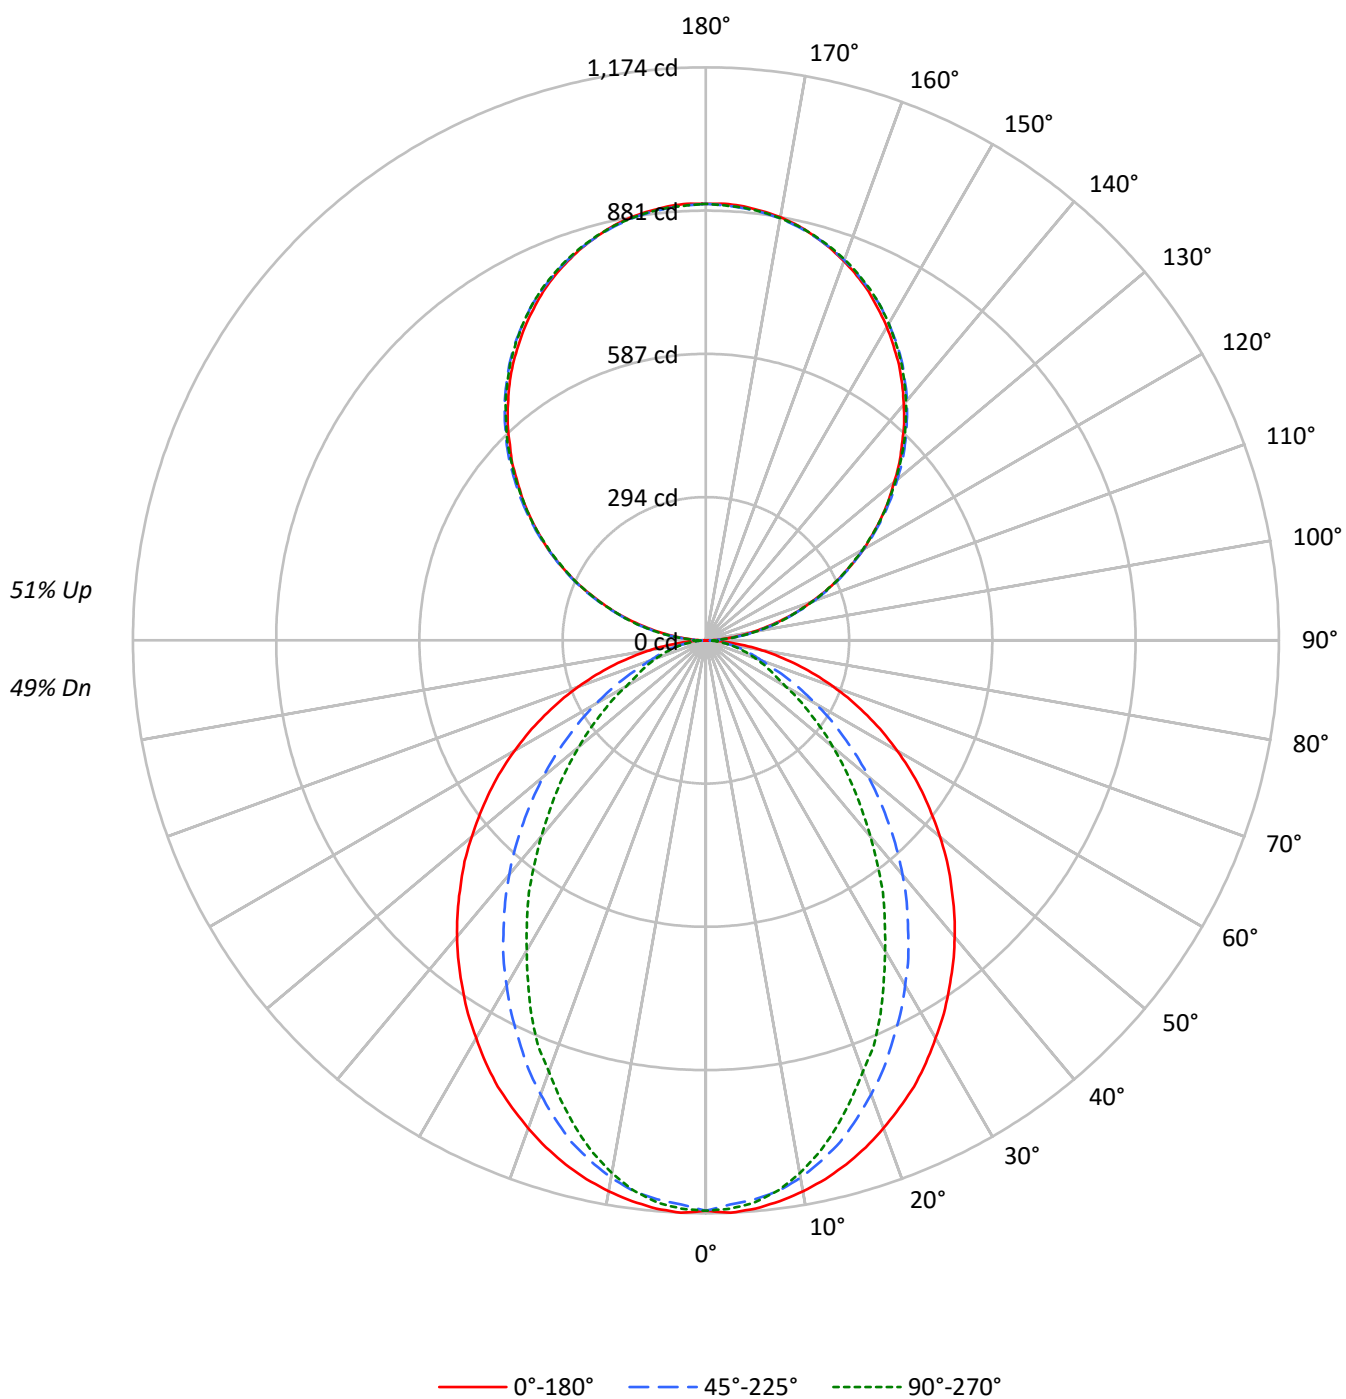

TEST NUMBER: P902874

CATALOG NUMBER: DFN2DIP-PN2F0-030D030US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2531	2531	2531
5°	2531	2486	2503
10°	2502	2431	2418
15°	2463	2346	2289
20°	2414	2230	2131
25°	2363	2101	1979
30°	2296	1970	1788
35°	2230	1829	1620
40°	2163	1684	1428
45°	2086	1523	1254
50°	2005	1362	1084
55°	1921	1190	922
60°	1822	1011	755
65°	1710	830	676
70°	1572	661	606
75°	1399	572	544
80°	1152	465	461
85°	752	290	327

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2086 cd/sqm

TEST NUMBER: P902874

CATALOG NUMBER: DFN2DIP-PN2F0-030D030US830-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	109.5	2.2
10°-20°	300.7	6.1
20°-30°	422.1	8.6
30°-40°	460.2	9.4
40°-50°	422.9	8.6
50°-60°	332.2	6.8
60°-70°	216.2	4.4
70°-80°	111.3	2.3
80°-90°	31.0	0.6
90°-100°	55.3	1.1
100°-110°	175.8	3.6
110°-120°	300.9	6.1
120°-130°	395.7	8.1
130°-140°	444.2	9.1
140°-150°	435.6	8.9
150°-160°	365.4	7.4
160°-170°	242.3	4.9
170°-180°	84.7	1.7
0°-30°	832.3	17.0
0°-40°	1292.5	26.3
0°-60°	2047.6	41.7
0°-90°	2406.0	49.0
90°-120°	532.1	10.8
90°-150°	1807.5	36.8
90°-180°	2500.0	51.0
0°-180°	4905.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1169	1169	1169	1169	1169	
5°	1169	1163	1150	1159	1156	111
15°	1112	1100	1064	1044	1033	313
25°	1009	975	905	862	846	464
35°	869	815	722	656	632	544
45°	711	640	529	454	428	549
55°	540	458	344	280	260	483
65°	365	279	184	148	145	362
75°	194	121	85	77	76	206
85°	45	23	20	20	20	52
90°	1	10	26	25	26	5
95°	39	47	48	48	47	44
105°	162	164	166	167	167	171
115°	302	306	305	304	302	299
125°	439	446	444	441	440	392
135°	568	576	578	577	575	439
145°	690	695	699	700	697	431
155°	789	791	793	797	795	363
165°	858	857	857	862	859	242
175°	893	890	889	894	890	85
180°	894	894	894	894	894	

TEST NUMBER: P902874

CATALOG NUMBER: DFN2DIP-PN2F0-030D030US830-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1168.7	1168.7	1168.7	1168.7	1168.7
2.5°	1173.9	1168.7	1157.0	1167.6	1165.5
5°	1168.7	1163.4	1149.6	1159.1	1155.9
7.5°	1159.1	1152.8	1138.0	1142.2	1136.9
10°	1146.4	1139.1	1117.9	1114.7	1108.4
12.5°	1130.6	1121.1	1092.5	1086.2	1074.5
15°	1111.5	1099.9	1063.9	1043.9	1033.3
17.5°	1089.3	1072.4	1027.9	1004.8	987.8
20°	1063.9	1042.7	989.9	963.6	940.2
22.5°	1036.5	1012.1	950.7	914.8	899.0
25°	1009.0	975.1	905.3	862.0	846.0
27.5°	976.2	940.2	863.0	813.3	788.9
30°	941.3	901.1	816.4	762.6	734.0
32.5°	907.4	858.8	772.1	708.6	682.1
35°	869.4	815.4	722.4	655.7	632.4
37.5°	832.4	774.1	675.8	602.8	576.5
40°	793.2	729.8	627.2	552.0	524.6
42.5°	753.0	685.4	578.5	500.2	473.8
45°	710.8	639.8	528.9	453.6	428.3
47.5°	670.5	595.5	481.3	406.0	382.9
50°	626.1	551.0	434.7	361.7	339.5
52.5°	582.7	503.4	390.3	320.5	300.4
55°	540.4	457.9	343.7	280.3	260.2
57.5°	497.1	412.5	302.6	243.3	226.3
60°	452.6	368.1	259.1	205.2	188.3
62.5°	409.3	324.7	222.1	171.4	163.0
65°	364.9	279.2	184.0	148.1	144.9
67.5°	322.6	236.9	148.1	130.1	126.9
70°	278.1	195.7	122.6	112.1	107.8
72.5°	235.8	157.5	102.5	94.2	92.0
75°	194.5	120.6	84.6	77.2	76.2
77.5°	153.4	85.6	66.6	62.4	60.2
80°	115.3	61.4	50.7	46.6	46.6
82.5°	80.3	41.3	34.9	32.8	32.8
85°	45.4	23.2	20.1	20.1	20.1
87.5°	17.0	8.4	8.4	7.4	7.4
90°	0.8	9.7	26.4	24.8	25.6
92.5°	16.7	22.6	23.5	24.2	24.2
95°	39.4	46.9	48.3	48.3	46.9
97.5°	65.5	72.5	75.5	75.5	75.5
100°	95.7	101.9	104.1	104.1	103.3
102.5°	127.5	132.1	135.1	135.9	135.1
105°	162.3	164.5	166.1	167.4	167.4
107.5°	196.8	200.0	200.0	200.6	196.8
110°	230.3	234.6	234.6	234.6	232.4



TEST NUMBER: P902874

CATALOG NUMBER: DFN2DIP-PN2F0-030D030US830-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	266.4	271.0	270.1	268.0	266.4
115°	302.0	306.2	304.9	304.2	302.0
117.5°	337.2	343.2	339.4	337.2	335.1
120°	372.9	378.8	372.9	372.9	370.4
122.5°	405.2	412.7	409.0	406.8	405.2
125°	439.2	445.9	443.7	441.3	440.5
127.5°	472.3	480.7	477.8	474.5	472.3
130°	503.3	513.0	511.7	510.1	507.1
132.5°	538.1	545.6	546.2	542.4	540.3
135°	568.1	576.4	578.1	577.2	575.0
137.5°	601.4	608.2	609.5	609.1	605.8
140°	630.8	637.6	641.4	641.4	638.4
142.5°	661.1	667.8	670.0	670.8	667.8
145°	689.7	695.0	699.4	700.1	697.2
147.5°	715.3	722.0	725.2	726.6	723.6
150°	741.7	746.3	749.2	751.7	749.2
152.5°	765.2	769.7	773.5	776.5	773.5
155°	788.6	790.7	793.1	796.9	794.6
157.5°	808.8	810.4	811.8	817.2	813.4
160°	826.9	828.5	829.3	833.9	830.7
162.5°	843.6	843.6	844.4	849.5	845.7
165°	857.9	857.1	857.1	862.4	858.7
167.5°	870.8	868.4	868.4	873.7	870.0
170°	880.5	878.4	877.6	883.0	878.4
172.5°	887.2	885.1	884.3	889.7	885.1
175°	892.7	890.5	888.9	894.3	889.7
177.5°	895.6	893.4	891.8	896.5	891.8
180°	894.3	894.3	894.3	894.3	894.3

TEST NUMBER: P902874

CATALOG NUMBER: DFN2DIP-PN2F0-030D030US830-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.17	10.99	11.14	11.97	13.26	6.13	6.96	7.11	7.94	9.22
	3H	11.82	12.56	12.80	13.55	14.86	7.30	8.04	8.29	9.03	10.34
	4H	12.42	13.11	13.41	14.11	15.42	7.74	8.44	8.74	9.43	10.75
	6H	12.82	13.46	13.83	14.46	15.79	8.05	8.69	9.06	9.69	11.02
	8H	12.94	13.55	13.95	14.56	15.89	8.13	8.74	9.14	9.75	11.08
	12H	12.99	13.57	14.01	14.58	15.93	8.17	8.75	9.18	9.75	11.10
4H	2H	10.18	10.87	11.18	11.87	13.19	6.72	7.41	7.72	8.41	9.72
	3H	11.98	12.56	12.99	13.58	14.92	8.05	8.62	9.06	9.65	10.98
	4H	12.66	13.19	13.68	14.20	15.56	8.58	9.11	9.60	10.12	11.48
	6H	13.15	13.61	14.18	14.65	16.00	8.98	9.43	10.01	10.47	11.82
	8H	13.32	13.74	14.35	14.77	16.14	9.10	9.52	10.13	10.55	11.92
	12H	13.40	13.78	14.45	14.83	16.20	9.15	9.54	10.20	10.58	11.95
8H	4H	12.62	13.05	13.65	14.08	15.44	8.85	9.27	9.88	10.30	11.67
	6H	13.17	13.52	14.22	14.59	15.95	9.34	9.69	10.40	10.77	12.13
	8H	13.37	13.68	14.43	14.73	16.12	9.52	9.83	10.58	10.89	12.27
	12H	13.49	13.76	14.56	14.82	16.24	9.63	9.90	10.69	10.95	12.37
12H	4H	12.57	12.96	13.62	14.00	15.37	8.85	9.23	9.90	10.28	11.65
	6H	13.14	13.45	14.20	14.51	15.89	9.39	9.69	10.45	10.75	12.13
	8H	13.34	13.62	14.41	14.67	16.09	9.58	9.85	10.65	10.90	12.33

END OF REPORT