

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902886

Luminaire Tested: DFN2DIP-PN2F0-030D060US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902886
REPORT IS A COMBINATION OF REPORTS P899504 AND P896349
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-030D060US830-RLLFLL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7408.4 lumens
Efficiency: N/A
Efficacy: 92.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 80.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902886

CATALOG NUMBER: DFN2DIP-PN2F0-030D060US830-RLLFLL

Luminous Intensity Polar Plot

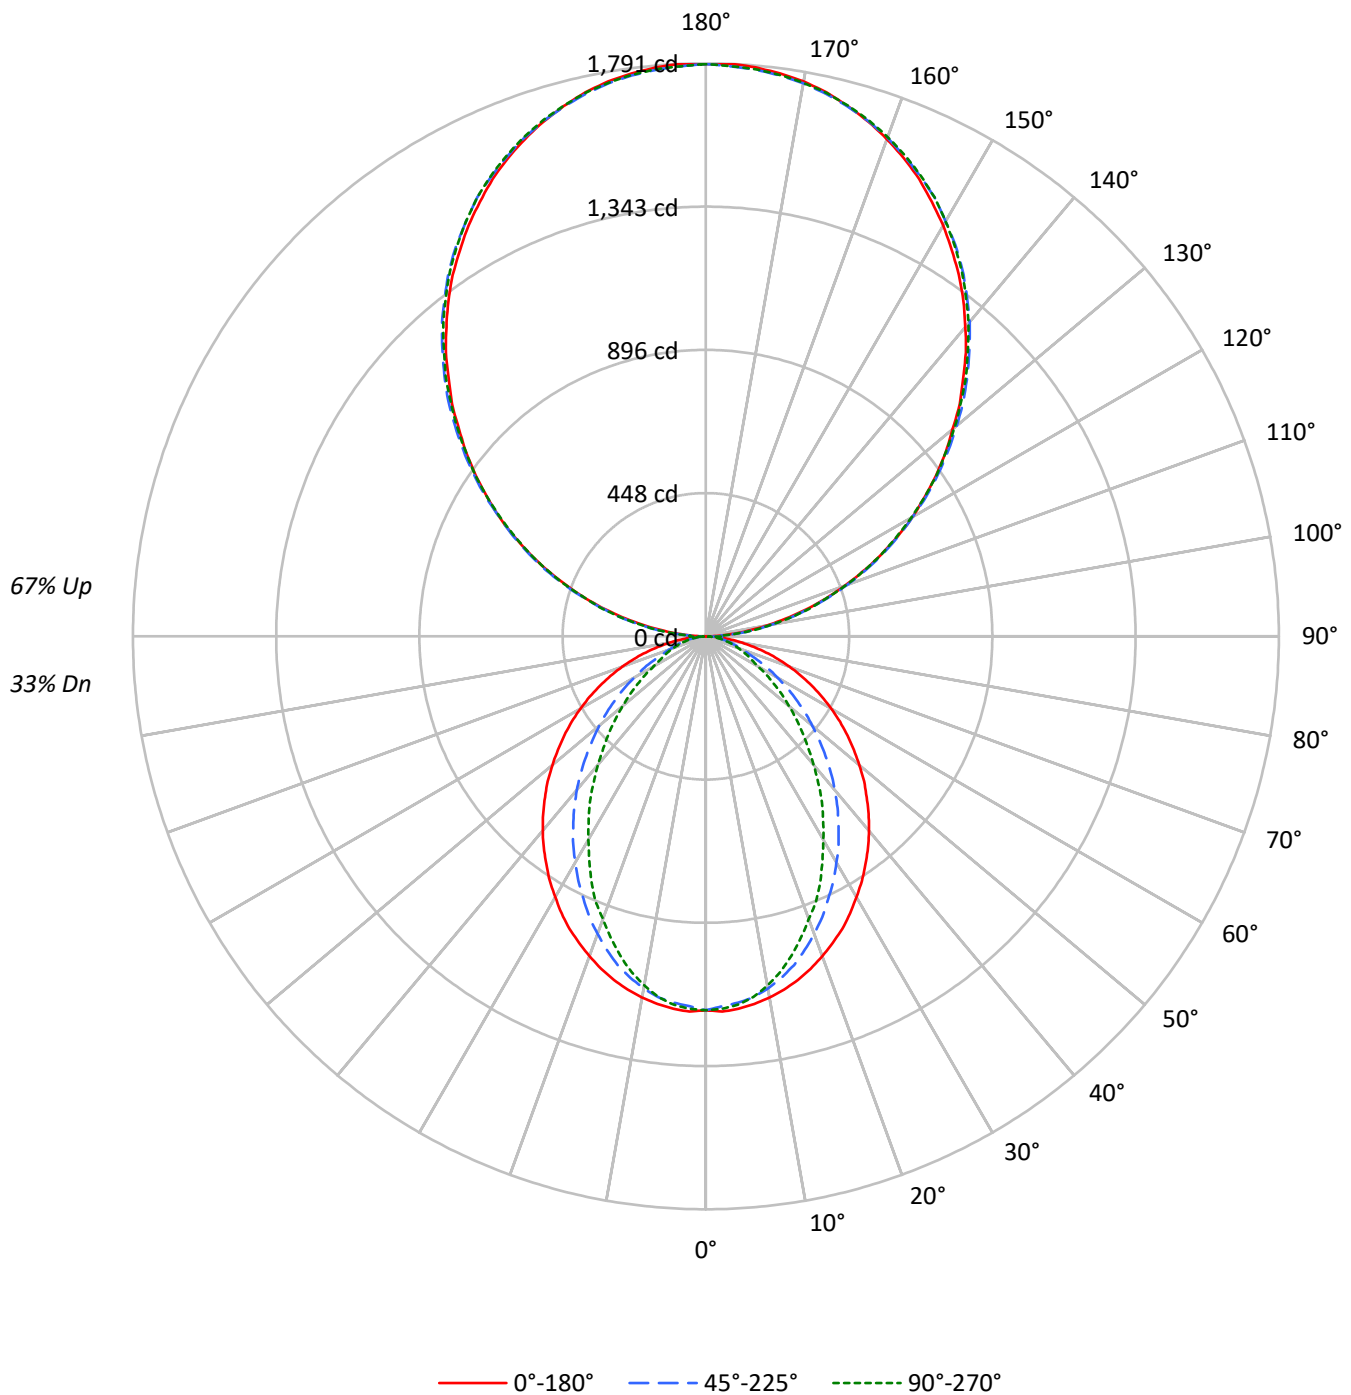

TEST NUMBER: P902886

CATALOG NUMBER: DFN2DIP-PN2F0-030D060US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	79	73	68	77	71	67	62	57	54	51	44	42	40	32	31	29
3	79	70	63	57	71	63	57	52	51	46	43	39	36	34	29	27	25
4	72	62	54	49	65	56	50	45	45	41	37	35	32	29	26	24	22
5	66	55	47	42	59	50	43	38	40	36	32	32	28	26	23	21	19
6	61	49	42	36	55	45	38	33	36	32	28	29	25	23	21	19	17
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	19	17	15
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13
10	45	34	27	22	41	31	25	21	25	21	18	20	17	15	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2531	2531	2531
5°	2531	2486	2503
10°	2502	2431	2418
15°	2463	2346	2289
20°	2414	2230	2131
25°	2363	2101	1979
30°	2296	1970	1788
35°	2230	1829	1620
40°	2163	1684	1428
45°	2086	1523	1254
50°	2005	1362	1084
55°	1921	1190	922
60°	1822	1011	755
65°	1710	830	676
70°	1572	661	606
75°	1399	572	544
80°	1152	465	461
85°	752	290	327

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2411 cd/sqm

TEST NUMBER: P902886

CATALOG NUMBER: DFN2DIP-PN2F0-030D060US830-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	109.5	1.5
10°-20°	300.7	4.1
20°-30°	422.1	5.7
30°-40°	460.2	6.2
40°-50°	422.9	5.7
50°-60°	332.2	4.5
60°-70°	216.2	2.9
70°-80°	111.3	1.5
80°-90°	33.5	0.5
90°-100°	110.7	1.5
100°-110°	351.6	4.7
110°-120°	601.8	8.1
120°-130°	791.4	10.7
130°-140°	888.4	12.0
140°-150°	871.1	11.8
150°-160°	730.8	9.9
160°-170°	484.6	6.5
170°-180°	169.4	2.3
0°-30°	832.3	11.2
0°-40°	1292.5	17.4
0°-60°	2047.6	27.6
0°-90°	2408.6	32.5
90°-120°	1064.1	14.4
90°-150°	3615.0	48.8
90°-180°	5000.0	67.5
0°-180°	7408.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1169	1169	1169	1169	1169	
5°	1169	1163	1150	1159	1156	111
15°	1112	1100	1064	1044	1033	313
25°	1009	975	905	862	846	464
35°	869	815	722	656	632	544
45°	711	640	529	454	428	549
55°	540	458	344	280	260	483
65°	365	279	184	148	145	362
75°	194	121	85	77	76	206
85°	45	23	20	20	20	52
90°	2	19	53	50	51	7
95°	79	94	96	96	94	88
105°	325	329	332	335	335	343
115°	604	613	610	608	604	597
125°	878	892	888	883	881	785
135°	1136	1153	1156	1154	1150	878
145°	1379	1390	1399	1400	1394	862
155°	1577	1582	1586	1594	1589	726
165°	1716	1714	1714	1725	1717	484
175°	1785	1781	1778	1789	1779	170
180°	1789	1789	1789	1789	1789	

TEST NUMBER: P902886

CATALOG NUMBER: DFN2DIP-PN2F0-030D060US830-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1168.7	1168.7	1168.7	1168.7	1168.7
2.5°	1173.9	1168.7	1157.0	1167.6	1165.5
5°	1168.7	1163.4	1149.6	1159.1	1155.9
7.5°	1159.1	1152.8	1138.0	1142.2	1136.9
10°	1146.4	1139.1	1117.9	1114.7	1108.4
12.5°	1130.6	1121.1	1092.5	1086.2	1074.5
15°	1111.5	1099.9	1063.9	1043.9	1033.3
17.5°	1089.3	1072.4	1027.9	1004.8	987.8
20°	1063.9	1042.7	989.9	963.6	940.2
22.5°	1036.5	1012.1	950.7	914.8	899.0
25°	1009.0	975.1	905.3	862.0	846.0
27.5°	976.2	940.2	863.0	813.3	788.9
30°	941.3	901.1	816.4	762.6	734.0
32.5°	907.4	858.8	772.1	708.6	682.1
35°	869.4	815.4	722.4	655.7	632.4
37.5°	832.4	774.1	675.8	602.8	576.5
40°	793.2	729.8	627.2	552.0	524.6
42.5°	753.0	685.4	578.5	500.2	473.8
45°	710.8	639.8	528.9	453.6	428.3
47.5°	670.5	595.5	481.3	406.0	382.9
50°	626.1	551.0	434.7	361.7	339.5
52.5°	582.7	503.4	390.3	320.5	300.4
55°	540.4	457.9	343.7	280.3	260.2
57.5°	497.1	412.5	302.6	243.3	226.3
60°	452.6	368.1	259.1	205.2	188.3
62.5°	409.3	324.7	222.1	171.4	163.0
65°	364.9	279.2	184.0	148.1	144.9
67.5°	322.6	236.9	148.1	130.1	126.9
70°	278.1	195.7	122.6	112.1	107.8
72.5°	235.8	157.5	102.5	94.2	92.0
75°	194.5	120.6	84.6	77.2	76.2
77.5°	153.4	85.6	66.6	62.4	60.2
80°	115.3	61.4	50.7	46.6	46.6
82.5°	80.3	41.3	34.9	32.8	32.8
85°	45.4	23.2	20.1	20.1	20.1
87.5°	17.0	8.4	8.4	7.4	7.4
90°	1.6	19.4	52.9	49.6	51.2
92.5°	33.5	45.3	46.9	48.5	48.5
95°	78.7	93.8	96.5	96.5	93.8
97.5°	131.0	145.1	151.0	151.0	151.0
100°	191.4	203.8	208.1	208.1	206.5
102.5°	255.1	264.2	270.1	271.7	270.1
105°	324.6	328.9	332.2	334.9	334.9
107.5°	393.6	400.1	400.1	401.1	393.6
110°	460.5	469.1	469.1	469.1	464.8

TEST NUMBER: P902886

CATALOG NUMBER: DFN2DIP-PN2F0-030D060US830-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	532.7	541.9	540.3	535.9	532.7
115°	603.9	612.6	609.8	608.2	603.9
117.5°	674.6	686.5	678.8	674.6	670.2
120°	745.7	757.6	745.7	745.7	740.8
122.5°	810.4	825.5	817.9	813.7	810.4
125°	878.4	891.8	887.5	882.7	881.1
127.5°	944.7	961.4	955.5	949.0	944.7
130°	1006.7	1026.1	1023.4	1020.2	1014.3
132.5°	1076.3	1091.4	1092.4	1084.9	1080.5
135°	1136.1	1152.8	1156.0	1154.4	1150.1
137.5°	1203.0	1216.4	1219.2	1218.0	1211.6
140°	1261.8	1275.3	1282.8	1282.8	1276.9
142.5°	1322.1	1335.6	1339.9	1341.5	1335.6
145°	1379.3	1390.1	1398.7	1400.3	1394.4
147.5°	1430.5	1444.0	1450.5	1453.1	1447.2
150°	1483.4	1492.5	1498.5	1503.3	1498.5
152.5°	1530.2	1539.5	1547.0	1552.9	1547.0
155°	1577.2	1581.5	1586.3	1593.9	1589.0
157.5°	1617.6	1620.9	1623.5	1634.4	1626.8
160°	1653.8	1657.0	1658.6	1667.7	1661.3
162.5°	1687.2	1687.2	1688.8	1699.0	1691.5
165°	1715.7	1714.1	1714.1	1724.9	1717.4
167.5°	1741.6	1736.8	1736.8	1747.6	1740.0
170°	1761.0	1756.7	1755.1	1765.9	1756.7
172.5°	1774.5	1770.2	1768.6	1779.3	1770.2
175°	1785.3	1781.0	1777.7	1788.6	1779.3
177.5°	1791.2	1787.0	1783.7	1792.8	1783.7
180°	1788.6	1788.6	1788.6	1788.6	1788.6

TEST NUMBER: P902886

CATALOG NUMBER: DFN2DIP-PN2F0-030D060US830-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.36	9.06	9.46	10.15	11.66	4.32	5.03	5.42	6.12	7.63
	3H	10.00	10.63	11.11	11.74	13.26	5.49	6.12	6.59	7.22	8.74
	4H	10.59	11.19	11.71	12.29	13.82	5.92	6.52	7.04	7.62	9.15
	6H	10.99	11.54	12.12	12.65	14.18	6.22	6.77	7.34	7.87	9.41
	8H	11.10	11.63	12.23	12.75	14.28	6.30	6.82	7.43	7.94	9.47
	12H	11.15	11.65	12.29	12.76	14.32	6.33	6.83	7.46	7.94	9.49
4H	2H	8.35	8.95	9.48	10.05	11.58	4.89	5.49	6.02	6.59	8.12
	3H	10.15	10.65	11.28	11.78	13.31	6.21	6.71	7.34	7.84	9.38
	4H	10.82	11.28	11.95	12.40	13.95	6.74	7.20	7.87	8.32	9.87
	6H	11.31	11.70	12.45	12.84	14.39	7.13	7.53	8.28	8.67	10.22
	8H	11.47	11.84	12.61	12.97	14.53	7.25	7.62	8.39	8.75	10.32
	12H	11.55	11.88	12.70	13.02	14.59	7.30	7.63	8.46	8.78	10.35
8H	4H	10.77	11.14	11.91	12.27	13.84	7.00	7.36	8.14	8.50	10.06
	6H	11.31	11.61	12.47	12.79	14.35	7.49	7.79	8.65	8.97	10.53
	8H	11.52	11.78	12.68	12.93	14.52	7.67	7.93	8.83	9.08	10.67
	12H	11.63	11.87	12.80	13.02	14.63	7.77	8.00	8.94	9.15	10.77
12H	4H	10.72	11.05	11.88	12.19	13.77	6.99	7.33	8.15	8.47	10.04
	6H	11.29	11.55	12.45	12.70	14.29	7.53	7.80	8.70	8.95	10.53
	8H	11.49	11.72	12.66	12.87	14.49	7.72	7.95	8.89	9.11	10.72