

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902908

Luminaire Tested: DFN2DIP-PN2F0-050D020US830-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902908
REPORT IS A COMBINATION OF REPORTS P899467 AND P896349
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-050D020US830-FLLFLL
Description: 2 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6333.9 lumens
Efficiency: N/A
Efficacy: 94.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 67
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9821
Total Harmonic Distortion (THDi): 0.08
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902908

CATALOG NUMBER: DFN2DIP-PN2F0-050D020US830-FLLFLL

Luminous Intensity Polar Plot

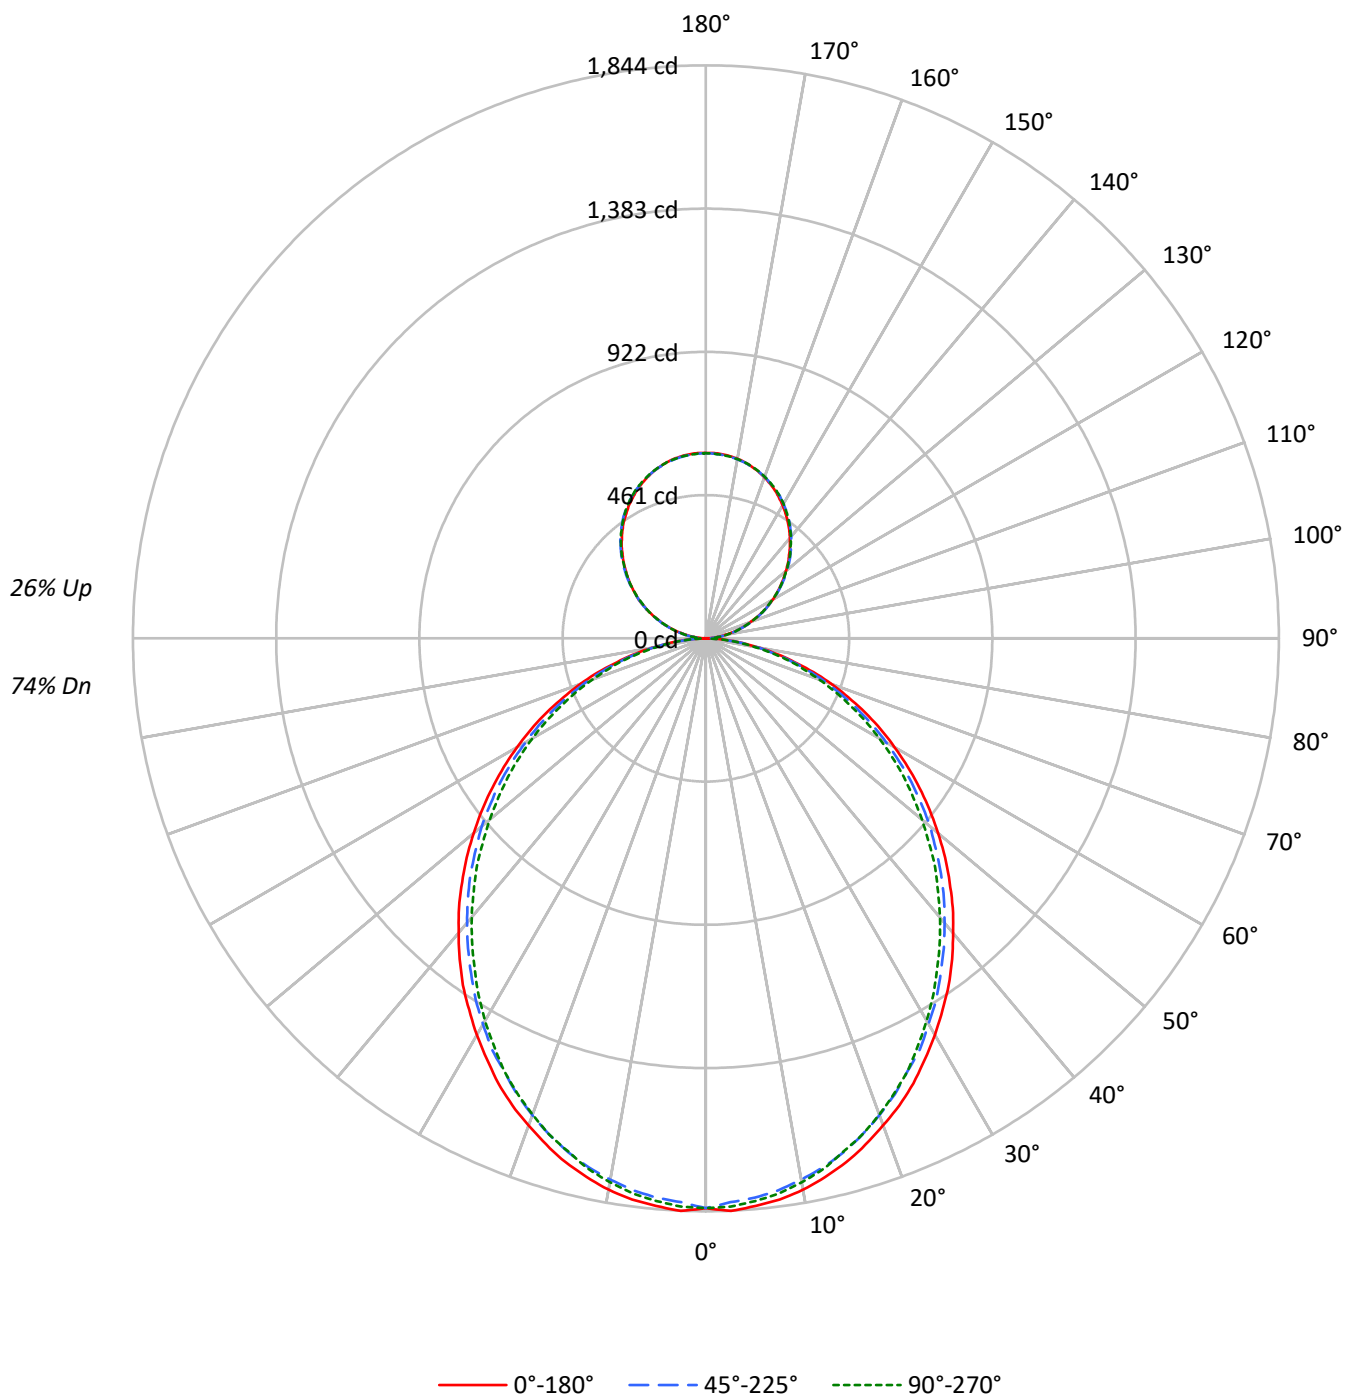

TEST NUMBER: P902908

CATALOG NUMBER: DFN2DIP-PN2F0-050D020US830-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	113	113	113	113	107	107	107	107	96	96	96	87	87	87	78	78	78
1	103	99	95	91	98	94	90	87	85	82	80	77	74	72	69	67	66
2	94	86	80	74	89	82	76	71	74	70	66	67	64	61	61	58	55
3	86	76	68	62	81	72	65	60	66	60	55	59	55	51	54	50	47
4	79	67	59	53	74	64	57	51	58	52	47	53	48	44	48	44	41
5	72	60	52	45	68	57	50	44	52	46	41	48	42	38	43	39	36
6	67	54	46	40	63	52	44	38	47	41	36	43	38	34	39	35	31
7	62	49	41	35	58	47	39	34	43	37	32	39	34	30	36	31	28
8	57	45	37	31	54	43	35	30	39	33	28	36	31	27	33	29	25
9	54	41	33	28	51	39	32	27	36	30	26	33	28	24	31	26	23
10	50	38	30	25	48	36	29	24	33	27	23	31	26	22	28	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3972	3972	3972
5°	3972	3908	3937
10°	3933	3847	3878
15°	3869	3775	3788
20°	3784	3679	3698
25°	3700	3565	3593
30°	3596	3459	3463
35°	3497	3335	3324
40°	3376	3209	3192
45°	3255	3083	3057
50°	3123	2950	2901
55°	2983	2796	2756
60°	2825	2615	2590
65°	2652	2426	2393
70°	2433	2196	2181
75°	2130	1920	1978
80°	1763	1568	1605
85°	1196	991	1005

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3255 cd/sqm

TEST NUMBER: P902908

CATALOG NUMBER: DFN2DIP-PN2F0-050D020US830-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	172.6	2.7
10°-20°	485.6	7.7
20°-30°	713.7	11.3
30°-40°	828.9	13.1
40°-50°	827.8	13.1
50°-60°	721.8	11.4
60°-70°	533.6	8.4
70°-80°	301.9	4.8
80°-90°	81.4	1.3
90°-100°	36.9	0.6
100°-110°	117.2	1.9
110°-120°	200.6	3.2
120°-130°	263.8	4.2
130°-140°	296.1	4.7
140°-150°	290.4	4.6
150°-160°	243.6	3.8
160°-170°	161.5	2.6
170°-180°	56.5	0.9
0°-30°	1371.9	21.7
0°-40°	2200.7	34.7
0°-60°	3750.4	59.2
0°-90°	4667.3	73.7
90°-120°	354.7	5.6
90°-150°	1205.0	19.0
90°-180°	1667.0	26.3
0°-180°	6333.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1834	1834	1834	1834	1834	
5°	1834	1827	1807	1821	1818	174
15°	1746	1735	1712	1719	1710	492
25°	1580	1566	1536	1539	1536	727
35°	1363	1346	1317	1307	1298	851
45°	1109	1097	1070	1051	1044	856
55°	839	829	808	786	778	750
65°	566	555	538	522	513	560
75°	296	293	284	273	277	316
85°	72	70	69	63	62	81
90°	1	6	18	16	17	6
95°	26	31	32	32	31	29
105°	108	110	111	112	112	114
115°	201	204	203	203	201	199
125°	293	297	296	294	294	262
135°	379	384	385	385	383	293
145°	460	463	466	467	465	287
155°	526	527	529	531	530	242
165°	572	571	571	575	572	161
175°	595	594	593	596	593	57
180°	596	596	596	596	596	

TEST NUMBER: P902908

CATALOG NUMBER: DFN2DIP-PN2F0-050D020US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1833.7	1833.7	1833.7	1833.7	1833.7
2.5°	1844.4	1835.6	1816.2	1833.7	1830.4
5°	1833.7	1826.8	1807.3	1821.4	1818.1
7.5°	1821.4	1810.9	1791.5	1805.7	1802.1
10°	1802.1	1789.8	1768.7	1782.6	1777.4
12.5°	1775.6	1765.1	1744.0	1752.8	1749.2
15°	1745.6	1735.1	1712.1	1719.3	1710.4
17.5°	1708.5	1698.1	1675.1	1683.9	1675.1
20°	1668.0	1657.6	1632.9	1638.0	1631.2
22.5°	1627.6	1611.7	1588.7	1588.7	1585.1
25°	1579.9	1565.8	1535.9	1539.3	1535.9
27.5°	1526.9	1514.6	1491.8	1486.5	1477.7
30°	1474.1	1460.0	1433.6	1428.3	1421.3
32.5°	1417.7	1407.2	1378.9	1368.3	1361.2
35°	1363.0	1345.5	1317.2	1306.6	1297.8
37.5°	1301.3	1285.4	1257.2	1244.8	1236.0
40°	1237.9	1223.7	1195.4	1179.7	1172.6
42.5°	1176.2	1162.0	1133.9	1116.1	1105.6
45°	1109.2	1096.8	1070.3	1051.0	1043.9
47.5°	1043.9	1031.5	1003.3	983.8	973.4
50°	975.1	966.3	941.6	916.9	908.0
52.5°	908.0	895.7	872.9	853.5	841.1
55°	839.4	828.8	807.6	786.5	777.7
57.5°	770.5	761.8	738.8	717.7	710.5
60°	701.7	694.8	670.1	650.6	645.5
62.5°	634.8	622.5	604.8	587.2	580.1
65°	566.1	555.4	537.8	522.0	513.1
67.5°	495.6	486.6	470.9	458.5	451.4
70°	430.3	423.2	407.3	394.9	388.0
72.5°	363.4	356.2	347.4	335.1	329.8
75°	296.1	292.8	283.8	273.3	276.9
77.5°	236.3	229.1	225.6	220.4	215.2
80°	176.4	174.6	171.0	165.8	162.2
82.5°	119.9	119.9	118.2	111.1	111.1
85°	72.2	70.5	68.8	63.4	61.7
87.5°	31.8	28.3	24.7	19.4	17.6
90°	0.6	6.5	17.6	16.5	17.1
92.5°	11.1	15.1	15.6	16.2	16.2
95°	26.2	31.3	32.1	32.1	31.3
97.5°	43.6	48.4	50.3	50.3	50.3
100°	63.8	68.0	69.4	69.4	68.8
102.5°	85.0	88.0	90.0	90.6	90.0
105°	108.2	109.6	110.7	111.6	111.6
107.5°	131.2	133.4	133.4	133.7	131.2
110°	153.5	156.4	156.4	156.4	155.0

TEST NUMBER: P902908

CATALOG NUMBER: DFN2DIP-PN2F0-050D020US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	177.6	180.6	180.1	178.6	177.6
115°	201.3	204.2	203.3	202.7	201.3
117.5°	224.9	228.8	226.3	224.9	223.4
120°	248.5	252.5	248.5	248.5	246.9
122.5°	270.1	275.1	272.7	271.3	270.1
125°	292.8	297.3	295.9	294.3	293.7
127.5°	314.9	320.5	318.5	316.3	314.9
130°	335.5	342.0	341.1	340.1	338.1
132.5°	358.7	363.8	364.1	361.7	360.1
135°	378.7	384.3	385.3	384.8	383.3
137.5°	401.0	405.5	406.4	406.0	403.9
140°	420.6	425.1	427.6	427.6	425.7
142.5°	440.7	445.2	446.7	447.1	445.2
145°	459.8	463.4	466.3	466.7	464.8
147.5°	476.8	481.4	483.5	484.4	482.4
150°	494.5	497.5	499.5	501.1	499.5
152.5°	510.1	513.1	515.7	517.6	515.7
155°	525.8	527.2	528.8	531.3	529.7
157.5°	539.2	540.3	541.2	544.8	542.2
160°	551.3	552.3	552.9	555.9	553.7
162.5°	562.4	562.4	562.9	566.4	563.8
165°	571.9	571.4	571.4	575.0	572.5
167.5°	580.5	578.9	578.9	582.5	580.0
170°	587.0	585.6	585.0	588.6	585.6
172.5°	591.5	590.0	589.6	593.1	590.0
175°	595.1	593.7	592.6	596.2	593.1
177.5°	597.1	595.7	594.6	597.6	594.6
180°	596.2	596.2	596.2	596.2	596.2

TEST NUMBER: P902908

CATALOG NUMBER: DFN2DIP-PN2F0-050D020US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.89	15.02	14.62	15.76	16.65	13.46	14.58	14.18	15.33	16.21
	3H	15.55	16.56	16.29	17.32	18.24	15.07	16.08	15.81	16.84	17.76
	4H	16.14	17.09	16.89	17.86	18.79	15.66	16.61	16.41	17.37	18.31
	6H	16.54	17.42	17.31	18.19	19.14	16.05	16.93	16.82	17.70	18.65
	8H	16.64	17.48	17.42	18.27	19.22	16.15	16.99	16.93	17.79	18.73
	12H	16.69	17.49	17.48	18.28	19.25	16.20	17.00	16.98	17.78	18.76
4H	2H	14.38	15.33	15.14	16.09	17.02	14.03	14.98	14.79	15.74	16.67
	3H	16.24	17.04	17.01	17.84	18.79	15.84	16.64	16.61	17.44	18.39
	4H	16.95	17.68	17.74	18.47	19.45	16.54	17.26	17.32	18.06	19.04
	6H	17.46	18.09	18.27	18.91	19.90	17.04	17.67	17.85	18.49	19.48
	8H	17.61	18.19	18.41	19.01	20.01	17.18	17.77	17.99	18.59	19.59
	12H	17.68	18.21	18.51	19.05	20.05	17.25	17.78	18.08	18.62	19.62
8H	4H	17.16	17.74	17.96	18.56	19.56	16.79	17.38	17.60	18.19	19.19
	6H	17.77	18.26	18.61	19.12	20.12	17.40	17.89	18.24	18.75	19.75
	8H	17.98	18.42	18.83	19.28	20.29	17.60	18.04	18.45	18.89	19.91
	12H	18.11	18.50	18.96	19.34	20.41	17.72	18.10	18.57	18.95	20.02
12H	4H	17.15	17.68	17.98	18.52	19.52	16.79	17.32	17.62	18.16	19.16
	6H	17.80	18.24	18.65	19.09	20.11	17.44	17.87	18.29	18.73	19.74
	8H	18.04	18.42	18.89	19.27	20.34	17.67	18.05	18.52	18.90	19.97