

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905590

Luminaire Tested: DFN2DIP-PN2F0-020D050US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905590
REPORT IS A COMBINATION OF REPORTS P899492 AND P896349
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-020D050US835-RLLFLL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6125.0 lumens
Efficiency: N/A
Efficacy: 106.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 57.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905590

CATALOG NUMBER: DFN2DIP-PN2F0-020D050US835-RLLFLL

Luminous Intensity Polar Plot

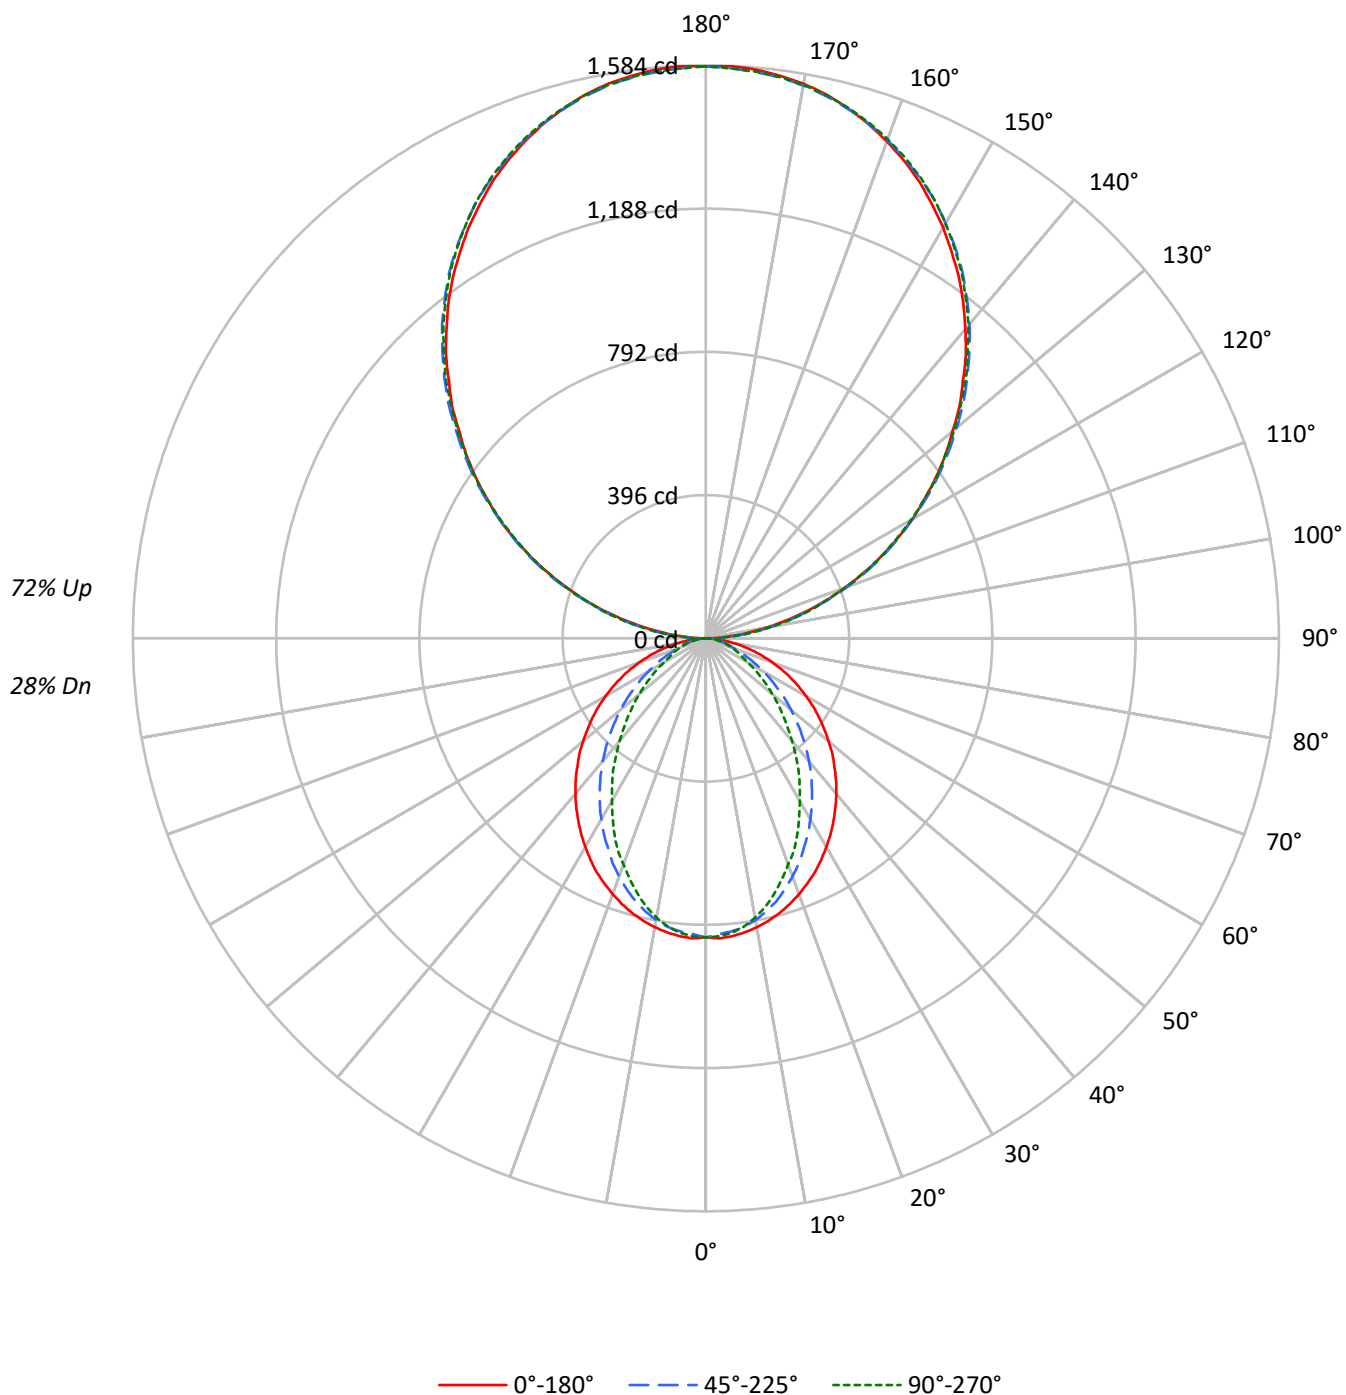

TEST NUMBER: P905590

CATALOG NUMBER: DFN2DIP-PN2F0-020D050US835-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36
1	93	89	85	82	83	80	77	74	62	60	59	47	45	44	32	31	31
2	85	78	72	67	76	70	65	61	55	52	49	41	39	37	28	27	26
3	78	69	62	56	69	62	56	51	49	45	41	37	34	32	25	24	23
4	71	61	53	48	63	55	48	44	43	39	35	33	30	27	23	21	20
5	65	54	47	41	58	49	42	37	39	34	31	29	26	24	21	19	17
6	60	49	41	35	54	44	37	32	35	30	27	27	23	21	19	17	15
7	55	44	36	31	50	40	33	28	32	27	23	24	21	19	17	15	14
8	51	40	32	27	46	36	30	25	29	24	21	22	19	16	16	14	12
9	48	36	29	24	43	33	27	22	26	22	19	20	17	15	15	13	11
10	45	33	26	22	40	30	24	20	24	20	17	19	16	13	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1790	1790	1790
5°	1790	1758	1770
10°	1770	1720	1710
15°	1742	1659	1619
20°	1707	1577	1508
25°	1671	1486	1400
30°	1624	1393	1265
35°	1577	1294	1146
40°	1530	1191	1010
45°	1475	1077	887
50°	1418	963	767
55°	1358	842	652
60°	1289	715	534
65°	1209	587	478
70°	1112	468	429
75°	990	405	385
80°	814	329	325
85°	532	205	231

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2133 cd/sqm

TEST NUMBER: P905590

CATALOG NUMBER: DFN2DIP-PN2F0-020D050US835-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.5	1.3
10°-20°	212.7	3.5
20°-30°	298.6	4.9
30°-40°	325.5	5.3
40°-50°	299.1	4.9
50°-60°	234.9	3.8
60°-70°	152.9	2.5
70°-80°	78.7	1.3
80°-90°	24.6	0.4
90°-100°	97.8	1.6
100°-110°	310.9	5.1
110°-120°	532.1	8.7
120°-130°	699.7	11.4
130°-140°	785.4	12.8
140°-150°	770.2	12.6
150°-160°	646.1	10.5
160°-170°	428.5	7.0
170°-180°	149.8	2.4
0°-30°	588.7	9.6
0°-40°	914.2	14.9
0°-60°	1448.3	23.6
0°-90°	1704.5	27.8
90°-120°	940.8	15.4
90°-150°	3196.2	52.2
90°-180°	4421.0	72.2
0°-180°	6125.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	827	827	827	827	827	
5°	827	823	813	820	818	78
15°	786	778	752	738	731	222
25°	714	690	640	610	598	328
35°	615	577	511	464	447	385
45°	503	452	374	321	303	388
55°	382	324	243	198	184	342
65°	258	198	130	105	102	256
75°	138	85	60	55	54	146
85°	32	16	14	14	14	37
90°	1	17	47	44	45	6
95°	70	83	85	85	83	77
105°	287	291	294	296	296	303
115°	534	542	539	538	534	528
125°	777	788	785	780	779	694
135°	1004	1019	1022	1021	1017	776
145°	1220	1229	1237	1238	1233	762
155°	1394	1398	1402	1409	1405	642
165°	1517	1516	1516	1525	1518	428
175°	1578	1575	1572	1581	1573	150
180°	1581	1581	1581	1581	1581	

TEST NUMBER: P905590

CATALOG NUMBER: DFN2DIP-PN2F0-020D050US835-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	826.6	826.6	826.6	826.6	826.6
2.5°	830.3	826.6	818.3	825.9	824.4
5°	826.6	822.9	813.1	819.9	817.6
7.5°	819.9	815.4	804.9	807.9	804.1
10°	810.9	805.6	790.7	788.4	784.0
12.5°	799.7	792.9	772.7	768.3	760.0
15°	786.2	777.9	752.5	738.3	730.9
17.5°	770.5	758.5	727.1	710.6	698.7
20°	752.5	737.5	700.2	681.5	665.0
22.5°	733.1	715.9	672.5	647.1	635.9
25°	713.7	689.7	640.3	609.7	598.4
27.5°	690.5	665.0	610.4	575.2	558.0
30°	665.8	637.3	577.5	539.4	519.1
32.5°	641.8	607.4	546.1	501.2	482.5
35°	614.9	576.8	511.0	463.8	447.3
37.5°	588.7	547.5	478.0	426.4	407.7
40°	561.0	516.2	443.6	390.5	371.0
42.5°	532.6	484.8	409.2	353.8	335.2
45°	502.7	452.5	374.1	320.9	302.9
47.5°	474.3	421.2	340.4	287.2	270.8
50°	442.9	389.8	307.5	255.8	240.2
52.5°	412.1	356.0	276.0	226.7	212.5
55°	382.2	323.9	243.1	198.3	184.0
57.5°	351.6	291.7	214.0	172.1	160.1
60°	320.2	260.3	183.3	145.2	133.2
62.5°	289.5	229.7	157.1	121.2	115.2
65°	258.1	197.5	130.2	104.8	102.5
67.5°	228.2	167.5	104.8	92.0	89.8
70°	196.7	138.4	86.7	79.3	76.3
72.5°	166.8	111.4	72.5	66.6	65.1
75°	137.6	85.2	59.8	54.6	53.9
77.5°	108.5	60.6	47.1	44.1	42.6
80°	81.5	43.4	35.9	32.9	32.9
82.5°	56.8	29.2	24.7	23.2	23.2
85°	32.1	16.4	14.2	14.2	14.2
87.5°	12.0	6.0	6.0	5.2	5.2
90°	1.4	17.2	46.7	43.9	45.3
92.5°	29.6	40.0	41.5	42.9	42.9
95°	69.6	83.0	85.3	85.3	83.0
97.5°	115.8	128.2	133.5	133.5	133.5
100°	169.2	180.2	184.0	184.0	182.6
102.5°	225.5	233.6	238.8	240.3	238.8
105°	287.0	290.8	293.7	296.0	296.0
107.5°	348.0	353.7	353.7	354.7	348.0
110°	407.1	414.8	414.8	414.8	410.9

TEST NUMBER: P905590

CATALOG NUMBER: DFN2DIP-PN2F0-020D050US835-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	471.0	479.1	477.7	473.9	471.0
115°	533.9	541.6	539.2	537.8	533.9
117.5°	596.4	606.9	600.2	596.4	592.6
120°	659.3	669.8	659.3	659.3	655.0
122.5°	716.5	729.9	723.2	719.4	716.5
125°	776.6	788.5	784.7	780.4	779.0
127.5°	835.2	850.0	844.8	839.0	835.2
130°	890.1	907.2	904.8	902.0	896.7
132.5°	951.6	964.9	965.9	959.2	955.4
135°	1004.5	1019.2	1022.1	1020.7	1016.9
137.5°	1063.6	1075.5	1077.9	1076.9	1071.2
140°	1115.5	1127.5	1134.1	1134.1	1128.9
142.5°	1168.9	1180.9	1184.7	1186.1	1180.9
145°	1219.5	1229.0	1236.6	1238.1	1232.8
147.5°	1264.8	1276.7	1282.4	1284.8	1279.5
150°	1311.5	1319.6	1324.8	1329.1	1324.8
152.5°	1353.0	1361.1	1367.7	1373.0	1367.7
155°	1394.4	1398.2	1402.5	1409.2	1404.9
157.5°	1430.2	1433.0	1435.4	1445.0	1438.3
160°	1462.1	1465.0	1466.4	1474.5	1468.8
162.5°	1491.7	1491.7	1493.1	1502.2	1495.5
165°	1517.0	1515.5	1515.5	1525.1	1518.4
167.5°	1539.8	1535.5	1535.5	1545.1	1538.4
170°	1557.0	1553.2	1551.8	1561.3	1553.2
172.5°	1568.9	1565.1	1563.7	1573.2	1565.1
175°	1578.5	1574.6	1571.8	1581.3	1573.2
177.5°	1583.7	1579.9	1577.0	1585.1	1577.0
180°	1581.3	1581.3	1581.3	1581.3	1581.3

TEST NUMBER: P905590

CATALOG NUMBER: DFN2DIP-PN2F0-020D050US835-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.51	7.19	7.64	8.31	9.86	2.48	3.16	3.61	4.28	5.83
	3H	8.16	8.76	9.29	9.89	11.46	3.64	4.25	4.78	5.37	6.95
	4H	8.74	9.32	9.89	10.45	12.02	4.07	4.65	5.22	5.77	7.35
	6H	9.14	9.67	10.30	10.80	12.39	4.37	4.90	5.52	6.03	7.62
	8H	9.25	9.76	10.41	10.90	12.48	4.45	4.95	5.61	6.10	7.68
	12H	9.30	9.78	10.46	10.92	12.52	4.48	4.95	5.64	6.09	7.70
4H	2H	6.50	7.08	7.66	8.21	9.79	3.05	3.62	4.20	4.75	6.33
	3H	8.30	8.77	9.46	9.93	11.52	4.36	4.84	5.52	5.99	7.59
	4H	8.97	9.41	10.13	10.55	12.16	4.89	5.33	6.05	6.47	8.08
	6H	9.45	9.83	10.62	11.00	12.60	5.28	5.66	6.45	6.82	8.42
	8H	9.61	9.97	10.78	11.12	12.74	5.40	5.75	6.56	6.90	8.52
	12H	9.69	10.01	10.87	11.18	12.80	5.44	5.76	6.63	6.93	8.55
8H	4H	8.92	9.27	10.09	10.43	12.04	5.14	5.50	6.31	6.65	8.27
	6H	9.46	9.75	10.64	10.95	12.56	5.63	5.92	6.82	7.12	8.74
	8H	9.66	9.91	10.85	11.09	12.72	5.81	6.06	7.00	7.24	8.87
	12H	9.78	10.00	10.97	11.17	12.84	5.91	6.13	7.10	7.31	8.97
12H	4H	8.86	9.18	10.05	10.35	11.97	5.14	5.46	6.32	6.63	8.25
	6H	9.43	9.68	10.62	10.86	12.49	5.68	5.93	6.87	7.11	8.74
	8H	9.63	9.85	10.82	11.03	12.69	5.87	6.09	7.06	7.26	8.93

END OF REPORT