

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905619

Luminaire Tested: DFN2DIP-PN2F0-040D020US835-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905619
REPORT IS A COMBINATION OF REPORTS P900986 AND P897905
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-040D020US835-RLLONL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5380.0 lumens
Efficiency: N/A
Efficacy: 97.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 55.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905619

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US835-RLLONL

Luminous Intensity Polar Plot

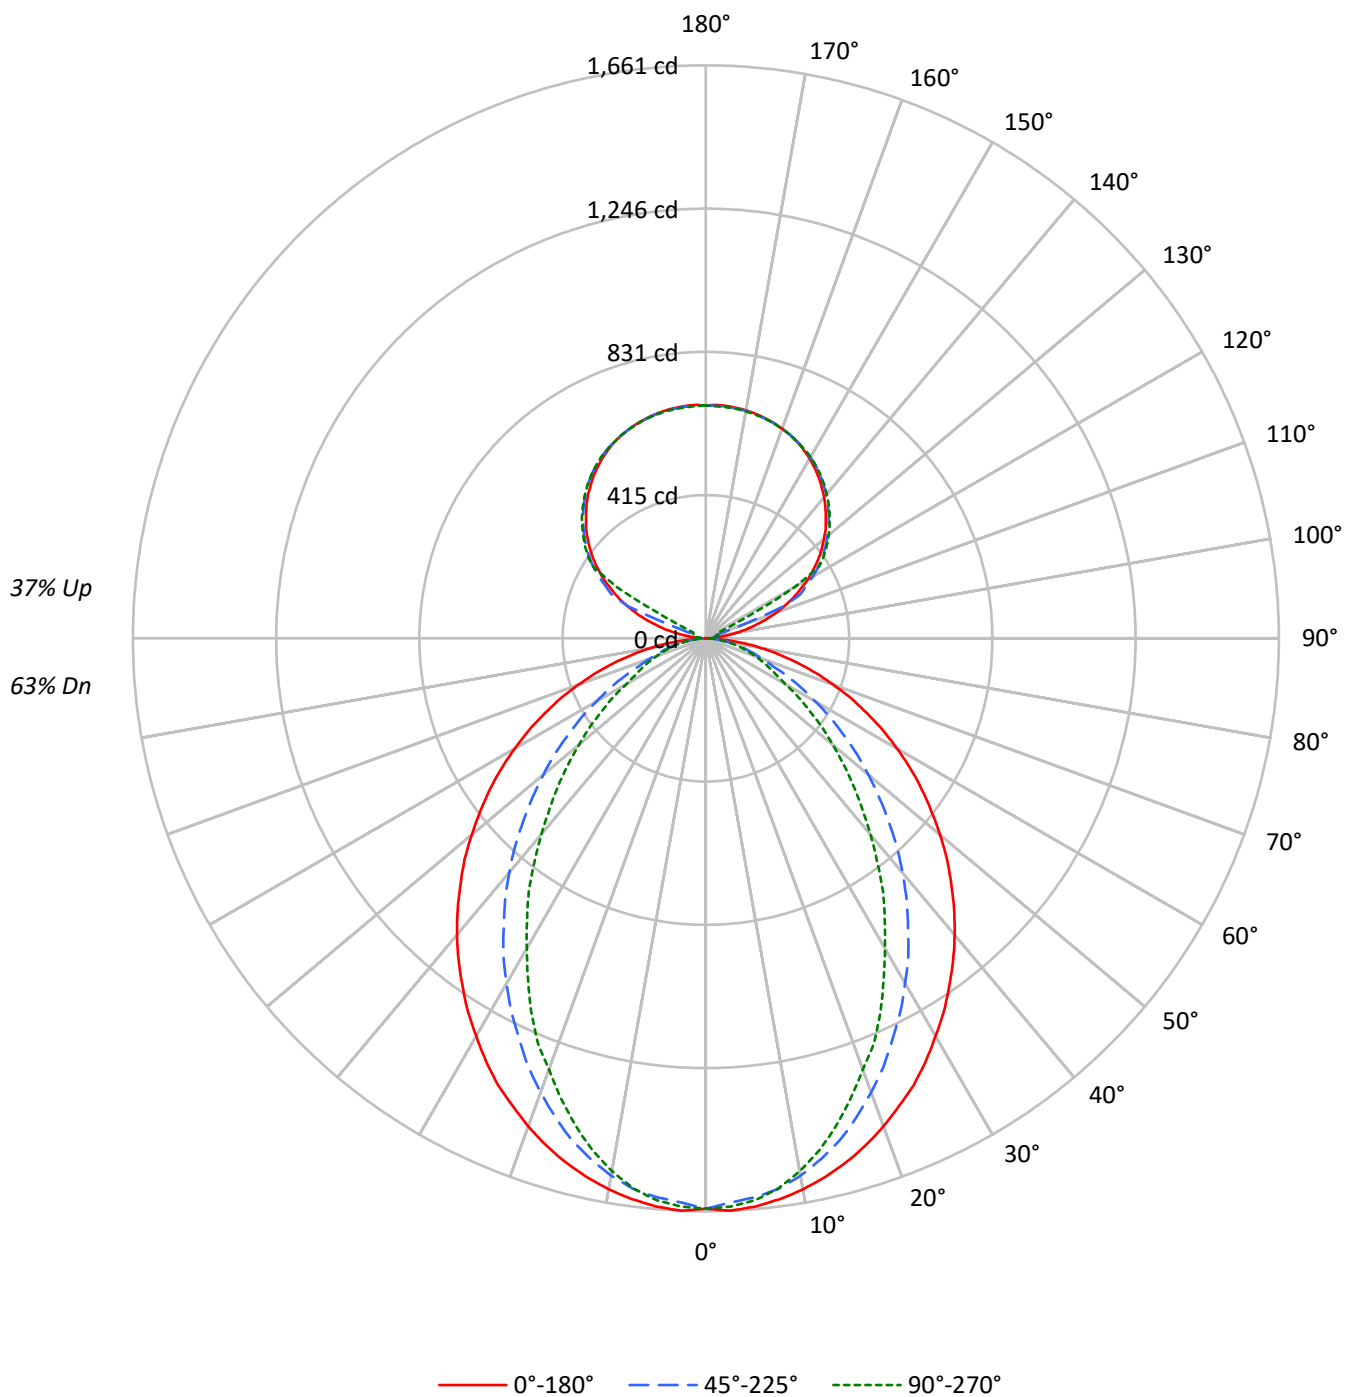

TEST NUMBER: P905619

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US835-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	110	110	110	110	103	103	103	103	91	91	91		79	79	79		68
1	101	97	93	90	95	91	88	85	80	78	76		71	69	67		61
2	93	86	80	75	87	81	75	71	71	67	64		63	60	57		55
3	85	76	69	63	80	72	65	60	63	58	54		56	52	49		49
4	78	68	60	54	73	64	57	52	57	51	47		50	46	43		44
5	72	61	53	47	67	57	50	45	51	45	41		46	41	37		40
6	67	55	47	41	62	52	45	39	46	41	36		41	37	33		37
7	62	50	42	36	58	47	40	35	42	36	32		38	33	30		34
8	58	45	38	32	54	43	36	31	39	33	29		35	30	27		31
9	54	42	34	29	51	40	33	28	36	30	26		32	27	24		29
10	50	38	31	26	47	37	30	25	33	28	24		30	25	22		27

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3581	3581	3581
5°	3581	3516	3541
10°	3539	3439	3421
15°	3485	3318	3238
20°	3415	3155	3015
25°	3343	2972	2800
30°	3248	2786	2530
35°	3155	2587	2292
40°	3060	2382	2020
45°	2950	2155	1774
50°	2836	1926	1534
55°	2717	1683	1304
60°	2578	1430	1069
65°	2419	1174	956
70°	2224	936	857
75°	1980	810	770
80°	1629	658	652
85°	1065	409	463

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2950 cd/sqm

TEST NUMBER: P905619

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US835-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.9	2.9
10°-20°	425.3	7.9
20°-30°	597.2	11.1
30°-40°	650.9	12.1
40°-50°	598.3	11.1
50°-60°	469.9	8.7
60°-70°	305.8	5.7
70°-80°	157.4	2.9
80°-90°	41.4	0.8
90°-100°	22.3	0.4
100°-110°	83.0	1.5
110°-120°	220.1	4.1
120°-130°	365.0	6.8
130°-140°	387.7	7.2
140°-150°	360.3	6.7
150°-160°	289.7	5.4
160°-170°	186.7	3.5
170°-180°	64.2	1.2
0°-30°	1177.4	21.9
0°-40°	1828.4	34.0
0°-60°	2896.5	53.8
0°-90°	3401.2	63.2
90°-120°	325.3	6.0
90°-150°	1438.2	26.7
90°-180°	1979.0	36.8
0°-180°	5380.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1653	1653	1653	1653	1653	
5°	1653	1646	1626	1640	1635	157
15°	1572	1556	1505	1477	1462	443
25°	1427	1379	1281	1219	1197	656
35°	1230	1154	1022	928	895	770
45°	1005	905	748	642	606	776
55°	764	648	486	396	368	683
65°	516	395	260	210	205	512
75°	275	170	120	109	108	291
85°	64	33	28	28	28	74
90°	0	6	10	12	13	5
95°	32	16	19	22	21	38
105°	148	163	30	35	37	159
115°	281	289	301	75	40	276
125°	397	403	413	416	418	354
135°	491	499	504	508	508	380
145°	570	570	578	581	579	356
155°	628	623	629	632	628	289
165°	661	658	660	663	660	187
175°	676	673	674	677	672	64
180°	675	675	675	675	675	

TEST NUMBER: P905619

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US835-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1653.2	1653.2	1653.2	1653.2	1653.2
2.5°	1660.7	1653.2	1636.7	1651.8	1648.7
5°	1653.2	1645.7	1626.2	1639.7	1635.3
7.5°	1639.7	1630.8	1609.9	1615.7	1608.3
10°	1621.8	1611.3	1581.4	1576.8	1568.0
12.5°	1599.4	1585.9	1545.4	1536.5	1520.0
15°	1572.4	1555.9	1505.1	1476.7	1461.8
17.5°	1541.0	1517.0	1454.1	1421.3	1397.3
20°	1505.1	1475.1	1400.3	1363.0	1330.0
22.5°	1466.2	1431.8	1344.9	1294.1	1271.8
25°	1427.3	1379.4	1280.6	1219.4	1196.8
27.5°	1381.0	1330.0	1220.8	1150.5	1116.0
30°	1331.6	1274.6	1154.9	1078.7	1038.3
32.5°	1283.7	1214.8	1092.2	1002.4	964.9
35°	1229.9	1153.5	1021.9	927.6	894.6
37.5°	1177.5	1095.1	956.0	852.7	815.4
40°	1122.1	1032.4	887.2	781.0	742.1
42.5°	1065.2	969.5	818.4	707.6	670.3
45°	1005.4	905.1	748.1	641.8	605.9
47.5°	948.6	842.4	680.8	574.5	541.6
50°	885.7	779.5	614.9	511.6	480.3
52.5°	824.3	712.1	552.1	453.3	424.9
55°	764.5	647.8	486.2	396.5	368.1
57.5°	703.2	583.5	427.9	344.1	320.2
60°	640.3	520.6	366.5	290.3	266.4
62.5°	579.1	459.4	314.1	242.4	230.5
65°	516.2	394.9	260.3	209.5	204.9
67.5°	456.4	335.1	209.5	184.0	179.5
70°	393.5	276.8	173.5	158.6	152.5
72.5°	333.7	222.9	145.1	133.2	130.2
75°	275.2	170.5	119.7	109.2	107.8
77.5°	217.0	121.1	94.3	88.3	85.2
80°	163.0	86.8	71.7	65.9	65.9
82.5°	113.7	58.4	49.4	46.3	46.3
85°	64.3	32.9	28.4	28.4	28.4
87.5°	24.0	11.9	11.9	10.5	10.5
90°	0.5	5.9	9.7	12.2	13.2
92.5°	12.2	10.3	11.7	12.7	13.2
95°	31.7	15.6	19.0	21.5	21.0
97.5°	57.1	17.1	24.9	26.4	26.9
100°	86.5	19.5	27.8	31.7	32.7
102.5°	118.7	117.7	28.8	34.2	35.7
105°	148.5	163.1	29.8	35.1	37.1
107.5°	183.2	195.3	30.8	36.1	38.1
110°	216.4	226.6	85.5	36.7	38.6



TEST NUMBER: P905619

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US835-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	247.6	256.4	248.1	37.6	39.1
115°	280.8	289.1	301.4	75.2	40.1
117.5°	309.6	319.4	327.7	257.9	129.9
120°	341.9	349.2	358.0	363.9	297.9
122.5°	369.2	377.0	386.8	389.7	390.3
125°	397.1	403.4	412.7	416.1	417.6
127.5°	422.5	429.3	436.7	441.5	442.0
130°	446.4	454.2	459.6	465.0	464.5
132.5°	470.8	477.2	482.5	486.9	486.5
135°	491.4	499.2	503.5	508.5	507.5
137.5°	512.8	518.7	523.6	528.5	527.0
140°	533.8	537.8	543.1	547.5	545.1
142.5°	551.4	554.9	561.2	565.1	562.6
145°	570.0	569.5	577.8	581.2	578.8
147.5°	586.1	584.6	592.9	595.3	593.4
150°	601.7	598.3	606.1	609.0	606.6
152.5°	614.9	611.0	618.3	621.3	617.8
155°	627.6	623.2	629.1	632.0	628.1
157.5°	637.9	634.0	638.4	641.8	637.9
160°	646.7	643.7	646.7	649.6	646.2
162.5°	654.4	651.5	654.0	657.4	653.0
165°	661.3	658.4	659.8	663.3	659.8
167.5°	666.7	663.7	665.2	668.7	664.2
170°	671.1	668.1	669.1	672.5	668.1
172.5°	674.0	671.1	672.1	675.5	671.1
175°	676.4	673.0	674.0	677.4	672.5
177.5°	677.4	674.0	674.5	677.9	673.5
180°	675.0	675.0	675.0	675.0	675.0

TEST NUMBER: P905619

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US835-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.61	13.57	13.46	14.42	15.50	8.58	9.53	9.42	10.39	11.46
	3H	14.28	15.13	15.14	16.00	17.10	9.76	10.61	10.62	11.48	12.58
	4H	14.88	15.68	15.75	16.56	17.67	10.21	11.01	11.08	11.88	12.99
	6H	15.29	16.03	16.18	16.91	18.04	10.52	11.26	11.40	12.14	13.26
	8H	15.41	16.12	16.30	17.02	18.14	10.61	11.31	11.50	12.21	13.33
	12H	15.47	16.14	16.37	17.03	18.18	10.64	11.31	11.54	12.21	13.35
4H	2H	12.64	13.45	13.52	14.32	15.43	9.18	9.98	10.06	10.86	11.97
	3H	14.46	15.13	15.35	16.03	17.16	10.52	11.19	11.41	12.10	13.22
	4H	15.14	15.75	16.04	16.65	17.80	11.06	11.67	11.96	12.57	13.72
	6H	15.64	16.17	16.56	17.09	18.25	11.47	11.99	12.38	12.92	14.07
	8H	15.81	16.30	16.72	17.22	18.39	11.59	12.08	12.51	13.00	14.17
	12H	15.90	16.34	16.83	17.28	18.45	11.65	12.09	12.58	13.03	14.20
8H	4H	15.11	15.60	16.03	16.52	17.69	11.34	11.83	12.25	12.75	13.91
	6H	15.66	16.06	16.60	17.03	18.19	11.84	12.24	12.78	13.20	14.37
	8H	15.86	16.22	16.82	17.18	18.36	12.02	12.37	12.97	13.33	14.51
	12H	15.99	16.31	16.95	17.26	18.49	12.13	12.44	13.08	13.39	14.62
12H	4H	15.07	15.51	16.00	16.45	17.62	11.34	11.78	12.28	12.72	13.90
	6H	15.64	15.99	16.59	16.95	18.13	11.88	12.24	12.83	13.19	14.38
	8H	15.85	16.16	16.80	17.11	18.34	12.08	12.40	13.04	13.34	14.58

END OF REPORT