

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911073

Luminaire Tested: DFN2DIP-PN2F0-040D020US850-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911073
REPORT IS A COMBINATION OF REPORTS P900985 AND P897905
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-040D020US850-FLLONL
Description: 2 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6587.5 lumens
Efficiency: N/A
Efficacy: 119.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 55.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911073

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US850-FLLONL

Luminous Intensity Polar Plot

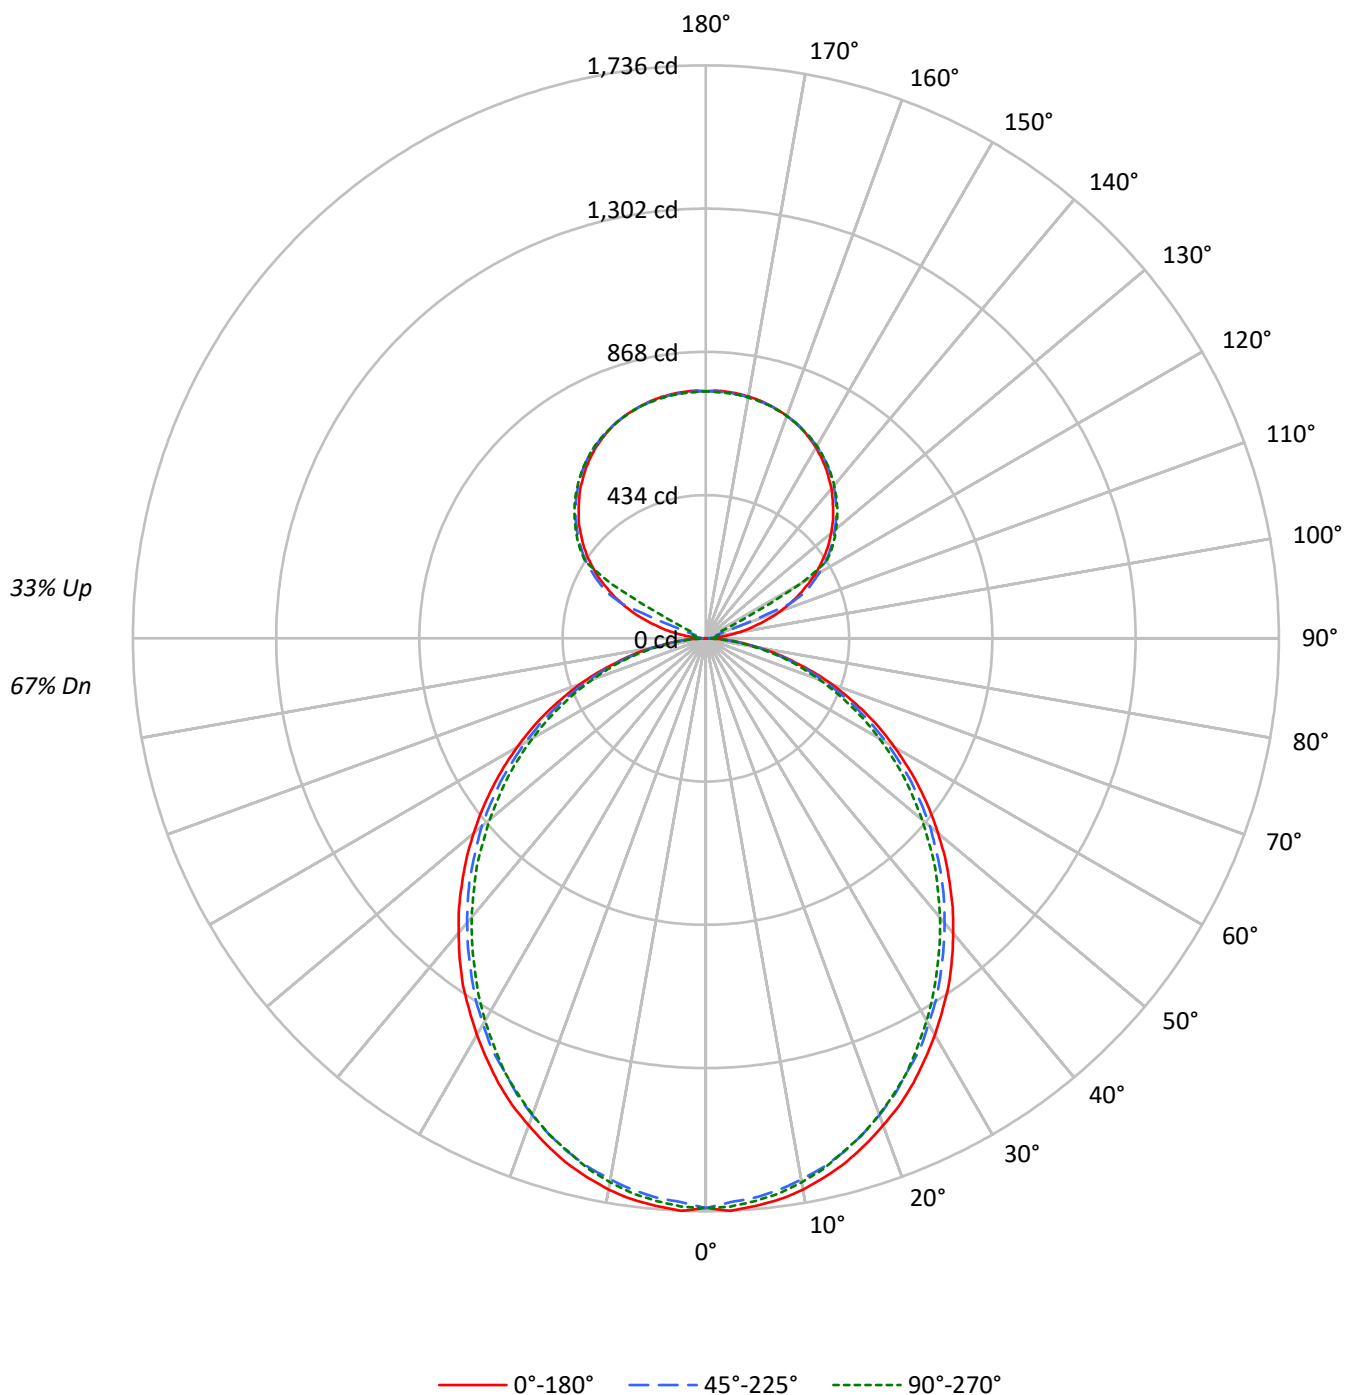

TEST NUMBER: P911073

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	71	71	71
1	102	97	93	90	95	92	88	85	81	79	76	72	70	68	63	62	60
2	92	85	79	73	87	80	75	70	71	67	63	63	60	57	56	53	51
3	84	75	67	61	79	71	64	58	63	58	53	56	52	48	49	46	43
4	77	66	58	52	72	63	55	50	56	50	45	50	45	41	44	40	37
5	71	59	51	44	67	56	48	43	50	44	39	45	40	36	40	36	33
6	66	53	45	39	62	50	43	37	45	39	34	41	35	32	36	32	29
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	26
8	56	44	36	30	53	42	34	29	38	31	27	34	29	25	30	26	23
9	53	40	32	27	50	38	31	26	35	29	24	31	26	23	28	24	21
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3738	3738	3738
5°	3738	3678	3706
10°	3702	3621	3650
15°	3642	3553	3566
20°	3562	3463	3481
25°	3483	3356	3382
30°	3385	3255	3259
35°	3291	3139	3129
40°	3178	3020	3005
45°	3064	2902	2877
50°	2939	2776	2730
55°	2808	2632	2594
60°	2660	2462	2437
65°	2497	2284	2254
70°	2290	2067	2053
75°	2006	1808	1861
80°	1659	1476	1511
85°	1127	933	946

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3064 cd/sqm

TEST NUMBER: P911073

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US850-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.5	2.5
10°-20°	457.1	6.9
20°-30°	671.7	10.2
30°-40°	780.2	11.8
40°-50°	779.2	11.8
50°-60°	679.5	10.3
60°-70°	502.3	7.6
70°-80°	284.2	4.3
80°-90°	76.3	1.2
90°-100°	24.7	0.4
100°-110°	92.0	1.4
110°-120°	244.0	3.7
120°-130°	404.8	6.1
130°-140°	429.9	6.5
140°-150°	399.6	6.1
150°-160°	321.3	4.9
160°-170°	207.0	3.1
170°-180°	71.2	1.1
0°-30°	1291.3	19.6
0°-40°	2071.5	31.4
0°-60°	3530.2	53.6
0°-90°	4393.0	66.7
90°-120°	360.7	5.5
90°-150°	1595.0	24.2
90°-180°	2194.0	33.3
0°-180°	6587.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1726	1726	1726	1726	1726	
5°	1726	1720	1701	1714	1711	164
15°	1643	1633	1612	1618	1610	463
25°	1487	1474	1446	1449	1446	684
35°	1283	1266	1240	1230	1222	801
45°	1044	1032	1007	989	983	806
55°	790	780	760	740	732	706
65°	533	523	506	491	483	527
75°	279	276	267	257	261	298
85°	68	66	65	60	58	76
90°	1	6	11	14	15	6
95°	35	17	21	24	23	42
105°	165	181	33	39	41	176
115°	311	321	334	83	44	307
125°	440	447	458	462	463	393
135°	545	554	558	564	563	421
145°	632	632	641	645	642	395
155°	696	691	698	701	697	321
165°	733	730	732	736	732	207
175°	750	746	748	751	746	71
180°	749	749	749	749	749	

TEST NUMBER: P911073

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1726.0	1726.0	1726.0	1726.0	1726.0
2.5°	1736.1	1727.8	1709.5	1726.0	1722.9
5°	1726.0	1719.5	1701.2	1714.4	1711.3
7.5°	1714.4	1704.5	1686.2	1699.7	1696.3
10°	1696.3	1684.7	1664.8	1678.0	1673.0
12.5°	1671.3	1661.4	1641.5	1649.9	1646.4
15°	1643.1	1633.2	1611.6	1618.3	1610.0
17.5°	1608.3	1598.4	1576.8	1585.0	1576.8
20°	1570.0	1560.1	1537.0	1541.8	1535.4
22.5°	1532.0	1517.0	1495.4	1495.4	1492.0
25°	1487.1	1473.9	1445.7	1448.9	1445.7
27.5°	1437.3	1425.6	1404.2	1399.2	1391.0
30°	1387.6	1374.3	1349.4	1344.4	1337.8
32.5°	1334.5	1324.6	1298.0	1288.0	1281.2
35°	1283.0	1266.5	1239.9	1229.9	1221.6
37.5°	1224.9	1209.9	1183.3	1171.8	1163.5
40°	1165.2	1151.8	1125.2	1110.4	1103.8
42.5°	1107.1	1093.7	1067.3	1050.6	1040.7
45°	1044.0	1032.5	1007.4	989.3	982.6
47.5°	982.6	970.9	944.4	926.1	916.3
50°	917.8	909.5	886.3	863.0	854.7
52.5°	854.7	843.2	821.7	803.4	791.7
55°	790.2	780.1	760.2	740.3	732.1
57.5°	725.3	717.1	695.3	675.5	668.8
60°	660.5	654.0	630.8	612.5	607.5
62.5°	597.5	585.9	569.4	552.7	546.1
65°	532.9	522.8	506.3	491.3	483.1
67.5°	466.4	458.0	443.3	431.6	425.0
70°	405.0	398.4	383.4	371.7	365.2
72.5°	342.0	335.3	327.0	315.4	310.4
75°	278.8	275.6	267.2	257.3	260.6
77.5°	222.4	215.7	212.4	207.4	202.5
80°	166.0	164.2	160.9	156.0	152.7
82.5°	112.9	112.9	111.3	104.6	104.6
85°	68.0	66.4	64.8	59.7	58.1
87.5°	29.9	26.6	23.3	18.3	16.5
90°	0.6	6.5	10.8	13.5	14.6
92.5°	13.5	11.4	13.0	14.1	14.6
95°	35.2	17.3	21.1	23.8	23.3
97.5°	63.3	19.0	27.6	29.3	29.8
100°	95.9	21.6	30.8	35.2	36.3
102.5°	131.6	130.5	31.9	37.9	39.6
105°	164.7	180.9	33.0	38.9	41.1
107.5°	203.2	216.6	34.2	40.0	42.3
110°	240.0	251.3	94.8	40.7	42.8

TEST NUMBER: P911073

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	274.6	284.3	275.1	41.7	43.4
115°	311.4	320.6	334.3	83.4	44.5
117.5°	343.3	354.2	363.4	286.0	144.1
120°	379.2	387.3	397.0	403.6	330.4
122.5°	409.4	418.1	429.0	432.2	432.8
125°	440.4	447.4	457.7	461.5	463.1
127.5°	468.6	476.1	484.3	489.6	490.2
130°	495.1	503.7	509.7	515.7	515.1
132.5°	522.1	529.2	535.1	540.0	539.5
135°	545.0	553.6	558.4	563.9	562.8
137.5°	568.7	575.2	580.7	586.1	584.4
140°	592.0	596.4	602.3	607.2	604.5
142.5°	611.5	615.4	622.4	626.7	623.9
145°	632.1	631.6	640.8	644.6	641.9
147.5°	650.0	648.3	657.5	660.2	658.1
150°	667.3	663.5	672.2	675.4	672.7
152.5°	681.9	677.6	685.7	689.0	685.1
155°	696.0	691.1	697.7	700.9	696.6
157.5°	707.4	703.1	708.0	711.8	707.4
160°	717.2	713.9	717.2	720.4	716.6
162.5°	725.7	722.5	725.3	729.1	724.2
165°	733.4	730.2	731.7	735.6	731.7
167.5°	739.4	736.0	737.7	741.6	736.6
170°	744.2	740.9	742.0	745.8	740.9
172.5°	747.5	744.2	745.4	749.1	744.2
175°	750.1	746.4	747.5	751.2	745.8
177.5°	751.2	747.5	748.0	751.8	746.9
180°	748.6	748.6	748.6	748.6	748.6

TEST NUMBER: P911073

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US850-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.15	14.18	13.95	15.01	16.02	12.71	13.75	13.51	14.57	15.58
	3H	14.80	15.73	15.62	16.56	17.60	14.32	15.25	15.13	16.08	17.12
	4H	15.38	16.26	16.21	17.10	18.15	14.90	15.78	15.73	16.62	17.67
	6H	15.78	16.59	16.62	17.43	18.50	15.29	16.10	16.13	16.95	18.01
	8H	15.88	16.65	16.73	17.52	18.58	15.39	16.16	16.24	17.03	18.09
	12H	15.93	16.66	16.78	17.52	18.61	15.43	16.17	16.29	17.03	18.12
4H	2H	13.62	14.50	14.46	15.34	16.39	13.27	14.15	14.11	14.99	16.04
	3H	15.48	16.21	16.32	17.08	18.15	15.08	15.81	15.92	16.68	17.75
	4H	16.18	16.85	17.04	17.72	18.82	15.77	16.44	16.63	17.31	18.40
	6H	16.69	17.27	17.56	18.16	19.26	16.27	16.85	17.14	17.74	18.84
	8H	16.83	17.37	17.71	18.26	19.37	16.41	16.95	17.29	17.84	18.95
	12H	16.91	17.39	17.80	18.30	19.42	16.47	16.96	17.37	17.87	18.98
8H	4H	16.38	16.92	17.26	17.81	18.92	16.02	16.55	16.89	17.44	18.55
	6H	17.00	17.44	17.90	18.38	19.49	16.62	17.07	17.53	18.00	19.11
	8H	17.21	17.60	18.12	18.53	19.65	16.83	17.22	17.74	18.15	19.27
	12H	17.33	17.68	18.25	18.60	19.78	16.94	17.29	17.85	18.20	19.38
12H	4H	16.38	16.86	17.27	17.77	18.89	16.01	16.50	16.91	17.41	18.52
	6H	17.02	17.42	17.94	18.34	19.47	16.66	17.06	17.58	17.98	19.11
	8H	17.26	17.61	18.18	18.52	19.70	16.89	17.24	17.81	18.15	19.33