

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911130

Luminaire Tested: DFN2DIP-PN2F0-060D060US850-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911130
REPORT IS A COMBINATION OF REPORTS P899510 AND P896349
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-060D060US850-RLLFLL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11544.7 lumens
Efficiency: N/A
Efficacy: 98.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 117.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.946
Total Harmonic Distortion (THDi): 0.132
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911130

CATALOG NUMBER: DFN2DIP-PN2F0-060D060US850-RLLFLL

Luminous Intensity Polar Plot

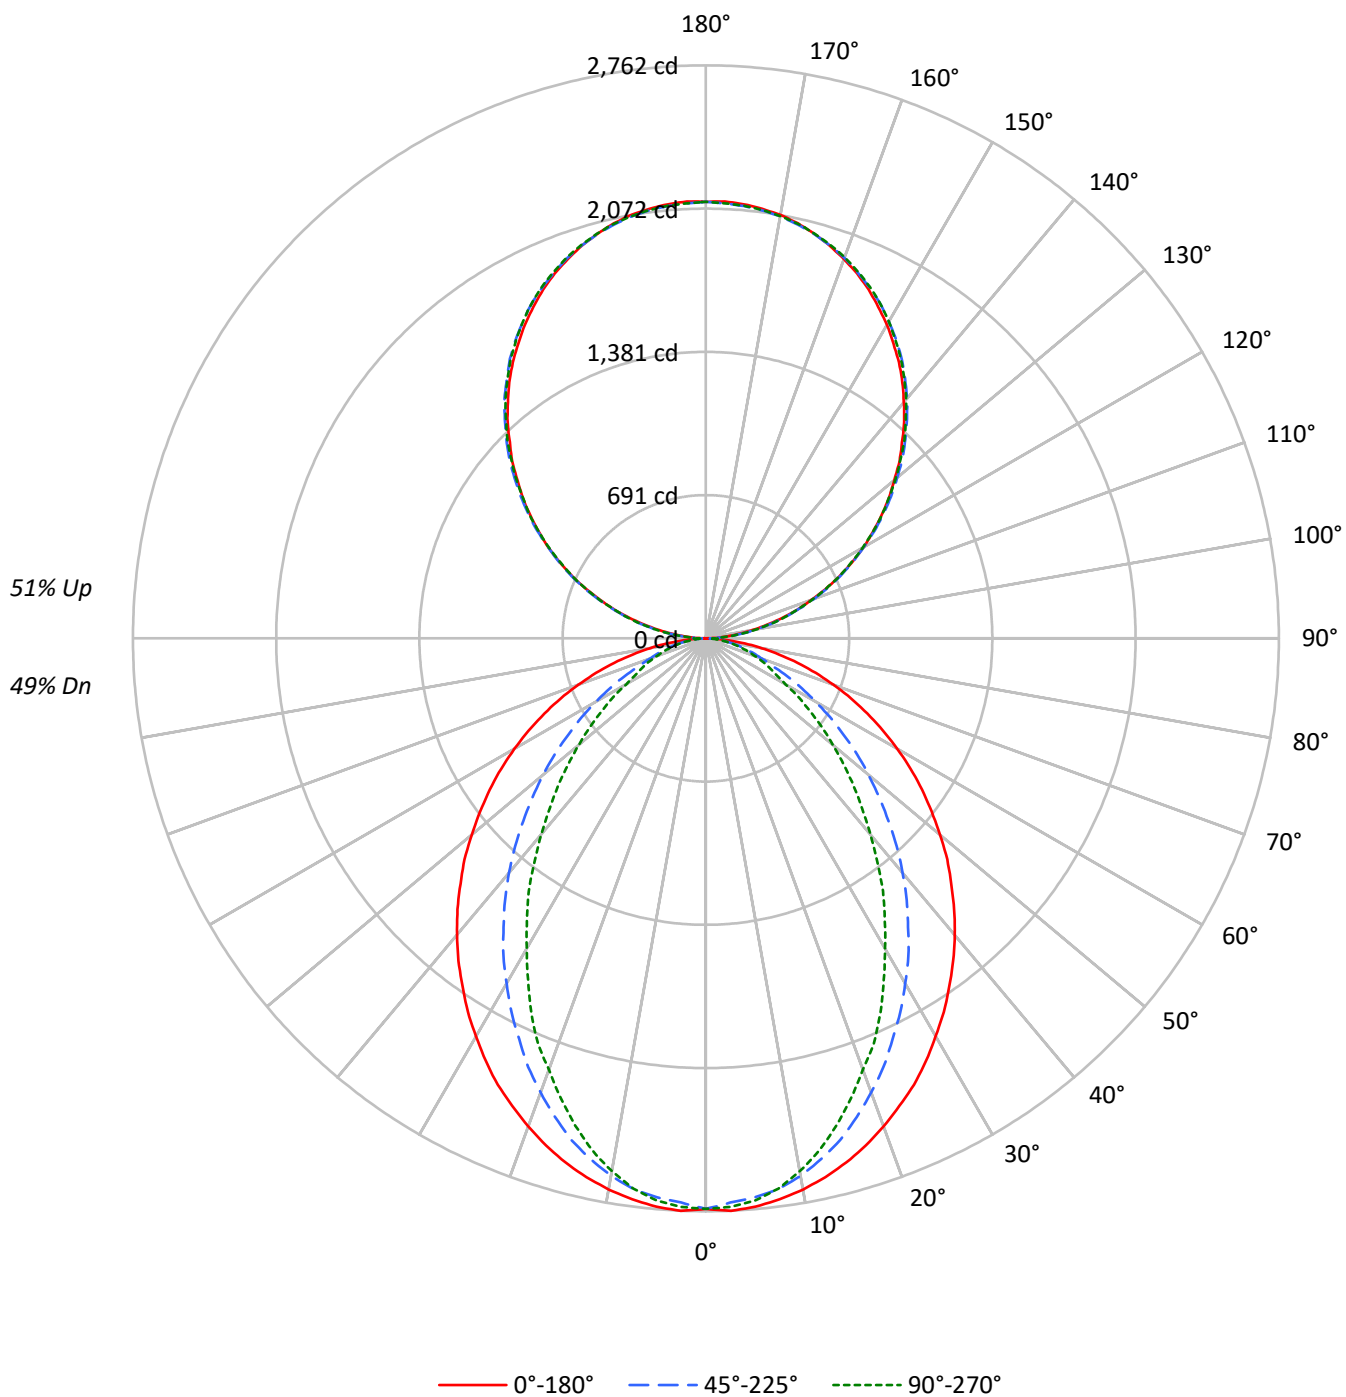

TEST NUMBER: P911130

CATALOG NUMBER: DFN2DIP-PN2F0-060D060US850-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5956	5956	5956
5°	5956	5849	5891
10°	5888	5722	5690
15°	5797	5520	5386
20°	5680	5248	5016
25°	5561	4945	4658
30°	5403	4635	4208
35°	5249	4304	3812
40°	5091	3961	3360
45°	4908	3584	2951
50°	4719	3204	2552
55°	4520	2800	2170
60°	4289	2380	1777
65°	4023	1954	1590
70°	3700	1556	1426
75°	3294	1347	1281
80°	2710	1094	1084
85°	1771	680	769

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4908 cd/sqm

TEST NUMBER: P911130

CATALOG NUMBER: DFN2DIP-PN2F0-060D060US850-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	257.7	2.2
10°-20°	707.6	6.1
20°-30°	993.4	8.6
30°-40°	1082.8	9.4
40°-50°	995.2	8.6
50°-60°	781.6	6.8
60°-70°	508.8	4.4
70°-80°	261.9	2.3
80°-90°	72.8	0.6
90°-100°	130.2	1.1
100°-110°	413.7	3.6
110°-120°	708.0	6.1
120°-130°	931.2	8.1
130°-140°	1045.3	9.1
140°-150°	1025.0	8.9
150°-160°	859.8	7.4
160°-170°	570.2	4.9
170°-180°	199.3	1.7
0°-30°	1958.7	17.0
0°-40°	3041.5	26.3
0°-60°	4818.4	41.7
0°-90°	5661.9	49.0
90°-120°	1252.0	10.8
90°-150°	4253.5	36.8
90°-180°	5883.0	51.0
0°-180°	11544.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2750	2750	2750	2750	2750	
5°	2750	2738	2705	2728	2720	261
15°	2616	2588	2504	2456	2432	737
25°	2374	2295	2130	2028	1991	1092
35°	2046	1919	1700	1543	1488	1281
45°	1672	1506	1244	1068	1008	1292
55°	1272	1078	809	660	612	1136
65°	859	657	433	349	341	851
75°	458	284	199	182	179	484
85°	107	55	47	47	47	123
90°	2	23	62	58	60	11
95°	93	110	114	114	110	103
105°	382	387	391	394	394	403
115°	710	721	718	716	710	703
125°	1034	1049	1044	1039	1037	924
135°	1337	1356	1360	1358	1353	1033
145°	1623	1636	1646	1648	1641	1014
155°	1856	1861	1866	1875	1870	854
165°	2019	2017	2017	2030	2021	569
175°	2101	2096	2092	2104	2094	200
180°	2104	2104	2104	2104	2104	

TEST NUMBER: P911130

CATALOG NUMBER: DFN2DIP-PN2F0-060D060US850-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2750.1	2750.1	2750.1	2750.1	2750.1
2.5°	2762.5	2750.1	2722.6	2747.7	2742.7
5°	2750.1	2737.7	2705.2	2727.7	2720.3
7.5°	2727.7	2712.8	2678.0	2687.8	2675.4
10°	2697.8	2680.3	2630.8	2623.1	2608.3
12.5°	2660.6	2638.1	2570.8	2556.0	2528.5
15°	2615.7	2588.2	2503.7	2456.4	2431.6
17.5°	2563.5	2523.5	2419.0	2364.3	2324.5
20°	2503.7	2453.8	2329.5	2267.4	2212.5
22.5°	2439.0	2381.7	2237.3	2152.8	2115.5
25°	2374.4	2294.6	2130.4	2028.5	1991.0
27.5°	2297.3	2212.5	2030.8	1913.8	1856.6
30°	2215.1	2120.3	1921.2	1794.5	1727.2
32.5°	2135.4	2020.8	1817.0	1667.5	1605.2
35°	2045.9	1918.9	1700.0	1543.1	1488.2
37.5°	1958.7	1821.6	1590.4	1418.5	1356.4
40°	1866.6	1717.4	1475.7	1299.1	1234.4
42.5°	1772.1	1612.8	1361.4	1177.1	1115.1
45°	1672.5	1505.6	1244.5	1067.5	1007.9
47.5°	1578.0	1401.3	1132.5	955.6	901.0
50°	1473.4	1296.8	1022.9	851.0	799.0
52.5°	1371.2	1184.5	918.4	754.1	706.9
55°	1271.7	1077.6	808.8	659.6	612.3
57.5°	1169.8	970.6	711.9	572.5	532.5
60°	1065.2	866.1	609.7	483.0	443.0
62.5°	963.3	764.2	522.6	403.2	383.4
65°	858.7	657.0	433.1	348.6	340.9
67.5°	759.1	557.4	348.6	306.1	298.7
70°	654.5	460.5	288.6	263.8	253.7
72.5°	555.1	370.7	241.3	221.6	216.5
75°	457.9	283.6	199.1	181.7	179.3
77.5°	361.0	201.5	156.8	146.8	141.8
80°	271.2	144.4	119.3	109.6	109.6
82.5°	189.1	97.1	82.1	77.1	77.1
85°	106.9	54.7	47.2	47.2	47.2
87.5°	39.9	19.9	19.9	17.4	17.4
90°	1.9	22.8	62.2	58.3	60.2
92.5°	39.4	53.3	55.2	57.1	57.1
95°	92.6	110.3	113.6	113.6	110.3
97.5°	154.2	170.7	177.7	177.7	177.7
100°	225.2	239.8	244.9	244.9	243.0
102.5°	300.1	310.9	317.8	319.7	317.8
105°	381.9	387.0	390.8	394.0	394.0
107.5°	463.1	470.8	470.8	472.0	463.1
110°	541.9	551.9	551.9	551.9	546.8

TEST NUMBER: P911130

CATALOG NUMBER: DFN2DIP-PN2F0-060D060US850-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	626.8	637.6	635.7	630.6	626.8
115°	710.5	720.7	717.5	715.6	710.5
117.5°	793.7	807.7	798.7	793.7	788.6
120°	877.4	891.4	877.4	877.4	871.7
122.5°	953.5	971.3	962.4	957.4	953.5
125°	1033.5	1049.3	1044.2	1038.6	1036.7
127.5°	1111.6	1131.2	1124.2	1116.7	1111.6
130°	1184.5	1207.4	1204.2	1200.4	1193.4
132.5°	1266.4	1284.1	1285.3	1276.5	1271.4
135°	1336.8	1356.4	1360.2	1358.3	1353.2
137.5°	1415.4	1431.3	1434.5	1433.2	1425.6
140°	1484.6	1500.5	1509.3	1509.3	1502.4
142.5°	1555.6	1571.5	1576.6	1578.4	1571.5
145°	1622.9	1635.6	1645.8	1647.6	1640.7
147.5°	1683.1	1699.0	1706.6	1709.7	1702.8
150°	1745.3	1756.1	1763.1	1768.7	1763.1
152.5°	1800.5	1811.3	1820.2	1827.2	1820.2
155°	1855.7	1860.8	1866.4	1875.4	1869.7
157.5°	1903.3	1907.1	1910.3	1923.0	1914.1
160°	1945.9	1949.6	1951.5	1962.3	1954.7
162.5°	1985.1	1985.1	1987.0	1999.1	1990.2
165°	2018.7	2016.8	2016.8	2029.6	2020.7
167.5°	2049.2	2043.6	2043.6	2056.2	2047.3
170°	2072.1	2067.0	2065.1	2077.7	2067.0
172.5°	2087.9	2082.8	2080.9	2093.6	2082.8
175°	2100.6	2095.6	2091.7	2104.4	2093.6
177.5°	2107.5	2102.6	2098.7	2109.4	2098.7
180°	2104.4	2104.4	2104.4	2104.4	2104.4

TEST NUMBER: P911130

CATALOG NUMBER: DFN2DIP-PN2F0-060D060US850-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.14	13.96	14.11	14.94	16.23	9.11	9.93	10.08	10.91	12.20
	3H	14.79	15.53	15.78	16.52	17.83	10.28	11.01	11.26	12.00	13.31
	4H	15.39	16.08	16.39	17.08	18.40	10.72	11.41	11.71	12.41	13.72
	6H	15.79	16.43	16.80	17.43	18.76	11.02	11.66	12.03	12.66	13.99
	8H	15.91	16.52	16.92	17.54	18.86	11.10	11.71	12.12	12.73	14.05
	12H	15.96	16.54	16.98	17.55	18.90	11.14	11.72	12.16	12.73	14.08
4H	2H	13.15	13.85	14.15	14.84	16.16	9.69	10.39	10.69	11.38	12.70
	3H	14.96	15.53	15.97	16.56	17.89	11.02	11.60	12.03	12.62	13.95
	4H	15.63	16.16	16.65	17.18	18.53	11.55	12.08	12.57	13.10	14.45
	6H	16.13	16.58	17.16	17.62	18.97	11.95	12.41	12.98	13.45	14.80
	8H	16.29	16.71	17.32	17.75	19.11	12.07	12.50	13.10	13.53	14.89
	12H	16.37	16.76	17.42	17.80	19.17	12.13	12.51	13.18	13.56	14.93
8H	4H	15.60	16.02	16.63	17.05	18.42	11.82	12.24	12.85	13.28	14.64
	6H	16.14	16.49	17.19	17.56	18.93	12.32	12.66	13.37	13.74	15.10
	8H	16.34	16.65	17.40	17.71	19.09	12.49	12.80	13.55	13.86	15.24
	12H	16.47	16.74	17.53	17.79	19.21	12.60	12.87	13.66	13.92	15.35
12H	4H	15.55	15.93	16.59	16.98	18.35	11.82	12.20	12.87	13.25	14.62
	6H	16.11	16.42	17.17	17.48	18.86	12.36	12.67	13.42	13.73	15.11
	8H	16.32	16.59	17.38	17.64	19.07	12.55	12.82	13.62	13.88	15.30