

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913771

Luminaire Tested: DFN2DIP-PN2F0-020D040US927-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913771
REPORT IS A COMBINATION OF REPORTS P901002 AND P897905
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-020D040US927-RLONL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4483.7 lumens
Efficiency: N/A
Efficacy: 94.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 47.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913771
CATALOG NUMBER: DFN2DIP-PN2F0-020D040US927-RLLONL

Luminous Intensity Polar Plot

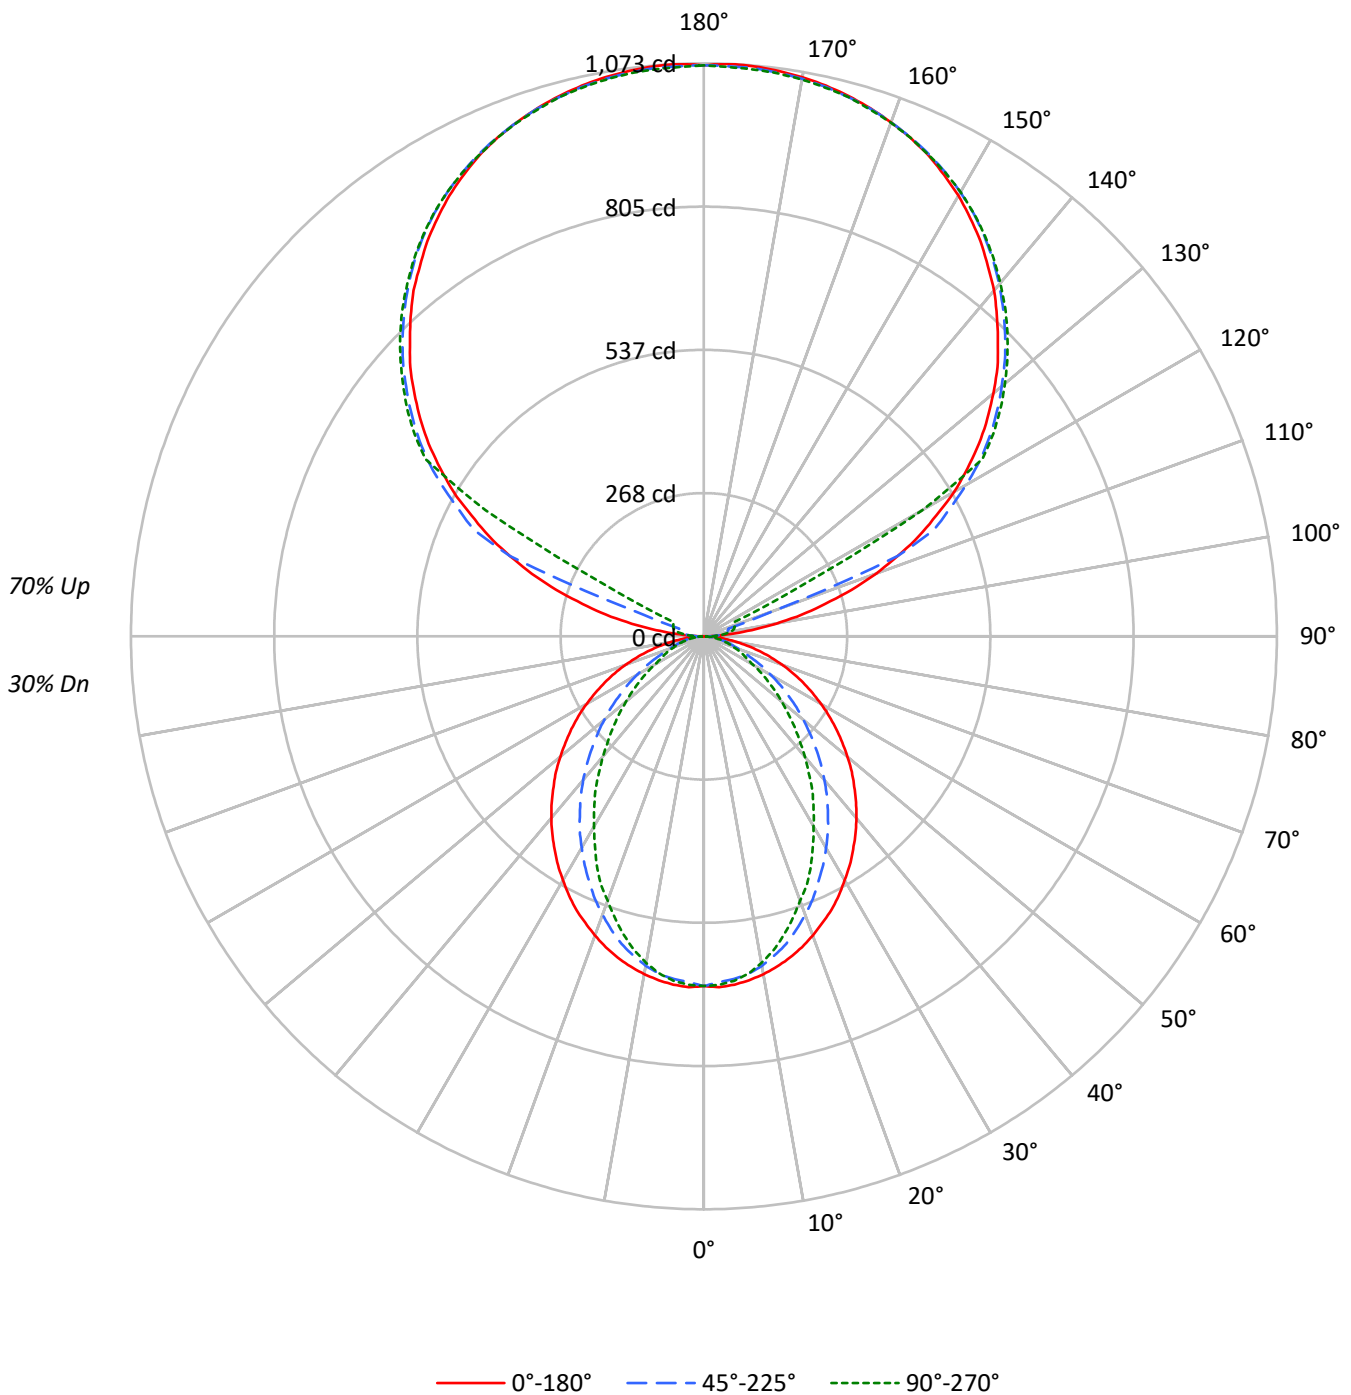



TEST NUMBER: P913771
 CATALOG NUMBER: DFN2DIP-PN2F0-020D040US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38	38	38	38	30
1	94	90	86	83	84	81	77	75	64	62	60	48	47	46	34	33	32	34	33	32	26
2	85	78	73	68	76	71	66	62	56	53	50	43	40	39	30	29	28	30	29	28	22
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24	27	25	24	19
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21	24	22	21	17
5	66	55	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18	22	20	18	15
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16	20	18	16	13
7	56	44	37	31	50	40	34	29	32	28	24	25	22	19	18	16	15	18	16	15	12
8	52	40	33	28	46	36	30	25	29	25	21	23	20	17	17	15	13	17	15	13	11
9	48	37	29	25	43	33	27	23	27	22	19	21	18	15	16	13	12	16	13	12	10
10	45	33	27	22	40	30	24	20	25	20	17	20	16	14	14	12	11	14	12	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1418	1418	1418
5°	1418	1393	1403
10°	1402	1362	1355
15°	1380	1314	1282
20°	1352	1250	1194
25°	1324	1177	1109
30°	1286	1104	1002
35°	1250	1025	908
40°	1212	943	800
45°	1169	854	703
50°	1124	763	608
55°	1076	667	517
60°	1022	567	423
65°	958	465	379
70°	881	370	340
75°	784	321	305
80°	646	260	258
85°	421	161	182

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1169 cd/sqm



TEST NUMBER: P913771

CATALOG NUMBER: DFN2DIP-PN2F0-020D040US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.4	1.4
10°-20°	168.5	3.8
20°-30°	236.5	5.3
30°-40°	257.8	5.8
40°-50°	237.0	5.3
50°-60°	186.1	4.2
60°-70°	121.2	2.7
70°-80°	62.3	1.4
80°-90°	17.8	0.4
90°-100°	35.2	0.8
100°-110°	131.5	2.9
110°-120°	348.6	7.8
120°-130°	578.2	12.9
130°-140°	614.2	13.7
140°-150°	570.9	12.7
150°-160°	458.9	10.2
160°-170°	295.7	6.6
170°-180°	101.8	2.3
0°-30°	466.4	10.4
0°-40°	724.2	16.2
0°-60°	1147.3	25.6
0°-90°	1348.6	30.1
90°-120°	515.3	11.5
90°-150°	2278.7	50.8
90°-180°	3135.0	69.9
0°-180°	4483.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	655	655	655	655	655	
5°	655	652	644	650	648	62
15°	623	616	596	585	579	176
25°	565	546	507	483	474	260
35°	487	457	405	367	354	305
45°	398	358	296	254	240	308
55°	303	257	193	157	146	271
65°	204	156	103	83	81	203
75°	109	68	47	43	43	115
85°	25	13	11	11	11	29
90°	1	9	15	19	21	4
95°	50	25	30	34	33	60
105°	235	258	47	56	59	251
115°	445	458	477	119	64	438
125°	629	639	654	659	662	561
135°	778	791	798	806	804	601
145°	903	902	915	921	917	565
155°	994	988	997	1001	995	458
165°	1048	1043	1045	1051	1045	296
175°	1072	1066	1068	1073	1066	102
180°	1069	1069	1069	1069	1069	



TEST NUMBER: P913771

CATALOG NUMBER: DFN2DIP-PN2F0-020D040US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	654.8	654.8	654.8	654.8	654.8
2.5°	657.7	654.8	648.2	654.3	653.1
5°	654.8	651.9	644.1	649.5	647.7
7.5°	649.5	645.9	637.6	640.0	637.0
10°	642.4	638.2	626.4	624.6	621.1
12.5°	633.5	628.1	612.1	608.6	602.1
15°	622.8	616.2	596.1	584.9	579.0
17.5°	610.4	600.9	576.0	562.9	553.5
20°	596.1	584.2	554.7	539.9	526.8
22.5°	580.7	567.1	532.7	512.6	503.7
25°	565.4	546.4	507.2	483.0	474.0
27.5°	547.0	526.8	483.5	455.7	442.0
30°	527.4	504.9	457.5	427.3	411.2
32.5°	508.4	481.2	432.6	397.0	382.2
35°	487.1	456.9	404.8	367.4	354.3
37.5°	466.4	433.7	378.7	337.8	323.0
40°	444.4	408.9	351.4	309.3	293.9
42.5°	421.9	384.0	324.2	280.3	265.5
45°	398.2	358.5	296.4	254.2	240.0
47.5°	375.7	333.7	269.7	227.5	214.5
50°	350.9	308.8	243.6	202.6	190.3
52.5°	326.5	282.0	218.6	179.6	168.3
55°	302.8	256.6	192.6	157.1	145.8
57.5°	278.5	231.1	169.5	136.3	126.8
60°	253.7	206.2	145.2	115.0	105.5
62.5°	229.3	182.0	124.5	96.0	91.3
65°	204.5	156.5	103.1	83.0	81.2
67.5°	180.8	132.7	83.0	72.9	71.1
70°	155.8	109.6	68.7	62.8	60.4
72.5°	132.1	88.2	57.4	52.8	51.6
75°	109.0	67.5	47.4	43.3	42.7
77.5°	86.0	48.0	37.3	34.9	33.7
80°	64.6	34.4	28.4	26.1	26.1
82.5°	45.0	23.1	19.6	18.4	18.4
85°	25.4	13.0	11.2	11.2	11.2
87.5°	9.5	4.8	4.8	4.1	4.1
90°	0.7	9.3	15.4	19.4	20.8
92.5°	19.4	16.2	18.5	20.1	20.8
95°	50.2	24.7	30.1	34.1	33.3
97.5°	90.5	27.1	39.5	41.8	42.5
100°	137.0	31.0	44.1	50.2	51.8
102.5°	188.0	186.6	45.6	54.1	56.5
105°	235.2	258.5	47.2	55.7	58.8
107.5°	290.2	309.5	48.8	57.3	60.4
110°	342.9	359.0	135.5	58.1	61.1



TEST NUMBER: P913771

CATALOG NUMBER: DFN2DIP-PN2F0-020D040US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	392.4	406.2	393.1	59.6	61.9
115°	444.9	458.0	477.4	119.1	63.5
117.5°	490.6	506.0	519.3	408.5	205.8
120°	541.7	553.3	567.2	576.5	472.1
122.5°	584.9	597.4	612.9	617.5	618.3
125°	629.1	639.2	653.9	659.3	661.6
127.5°	669.3	680.2	691.8	699.6	700.3
130°	707.3	719.7	728.1	736.6	735.9
132.5°	745.9	756.1	764.5	771.5	770.8
135°	778.5	790.9	797.8	805.6	804.1
137.5°	812.5	821.7	829.6	837.3	835.0
140°	845.7	852.0	860.5	867.4	863.6
142.5°	873.7	879.1	889.1	895.2	891.4
145°	903.1	902.3	915.4	920.8	916.9
147.5°	928.5	926.2	939.4	943.3	940.2
150°	953.3	947.9	960.4	965.0	961.1
152.5°	974.2	968.0	979.6	984.3	978.9
155°	994.3	987.5	996.7	1001.3	995.1
157.5°	1010.6	1004.4	1011.5	1016.8	1010.6
160°	1024.5	1019.9	1024.5	1029.1	1023.7
162.5°	1036.9	1032.3	1036.2	1041.6	1034.6
165°	1047.7	1043.1	1045.4	1050.8	1045.4
167.5°	1056.3	1051.5	1054.0	1059.4	1052.4
170°	1063.3	1058.6	1060.1	1065.6	1058.6
172.5°	1067.9	1063.3	1064.8	1070.2	1063.3
175°	1071.7	1066.3	1067.9	1073.2	1065.6
177.5°	1073.2	1067.9	1068.7	1074.1	1067.1
180°	1069.4	1069.4	1069.4	1069.4	1069.4



TEST NUMBER: P913771
 CATALOG NUMBER: DFN2DIP-PN2F0-020D040US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.02	6.71	7.14	7.82	9.35	1.99	2.68	3.11	3.79	5.32
	3H	7.67	8.29	8.79	9.40	10.95	3.15	3.77	4.28	4.88	6.43
	4H	8.26	8.84	9.39	9.96	11.51	3.58	4.17	4.72	5.29	6.84
	6H	8.66	9.19	9.80	10.31	11.88	3.88	4.42	5.02	5.54	7.10
	8H	8.77	9.28	9.91	10.41	11.97	3.96	4.47	5.11	5.61	7.17
	12H	8.82	9.30	9.97	10.43	12.01	3.99	4.48	5.14	5.61	7.19
4H	2H	6.02	6.60	7.16	7.72	9.27	2.56	3.14	3.70	4.26	5.81
	3H	7.81	8.30	8.96	9.44	11.01	3.88	4.36	5.02	5.51	7.07
	4H	8.48	8.93	9.63	10.06	11.65	4.40	4.85	5.55	5.98	7.57
	6H	8.97	9.35	10.13	10.51	12.08	4.80	5.18	5.95	6.33	7.91
	8H	9.13	9.49	10.29	10.64	12.23	4.91	5.27	6.07	6.42	8.01
	12H	9.21	9.53	10.38	10.69	12.29	4.96	5.29	6.13	6.44	8.04
8H	4H	8.44	8.79	9.59	9.94	11.53	4.66	5.02	5.82	6.16	7.76
	6H	8.97	9.27	10.15	10.46	12.05	5.15	5.45	6.33	6.63	8.22
	8H	9.18	9.43	10.36	10.60	12.21	5.33	5.59	6.51	6.75	8.36
	12H	9.29	9.52	10.48	10.68	12.33	5.43	5.65	6.61	6.82	8.46
12H	4H	8.38	8.70	9.55	9.86	11.46	4.66	4.98	5.83	6.14	7.74
	6H	8.95	9.21	10.13	10.37	11.98	5.19	5.45	6.37	6.62	8.23
	8H	9.15	9.37	10.33	10.54	12.18	5.38	5.61	6.57	6.77	8.42