

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913812

Luminaire Tested: DFN2DIP-PN2F0-040D050US927-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913812
REPORT IS A COMBINATION OF REPORTS P899495 AND P896349
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-040D050US927-FLLFLL
Description: 2 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6642.5 lumens
Efficiency: N/A
Efficacy: 82.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 80.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913812

CATALOG NUMBER: DFN2DIP-PN2F0-040D050US927-FLLFLL

Luminous Intensity Polar Plot

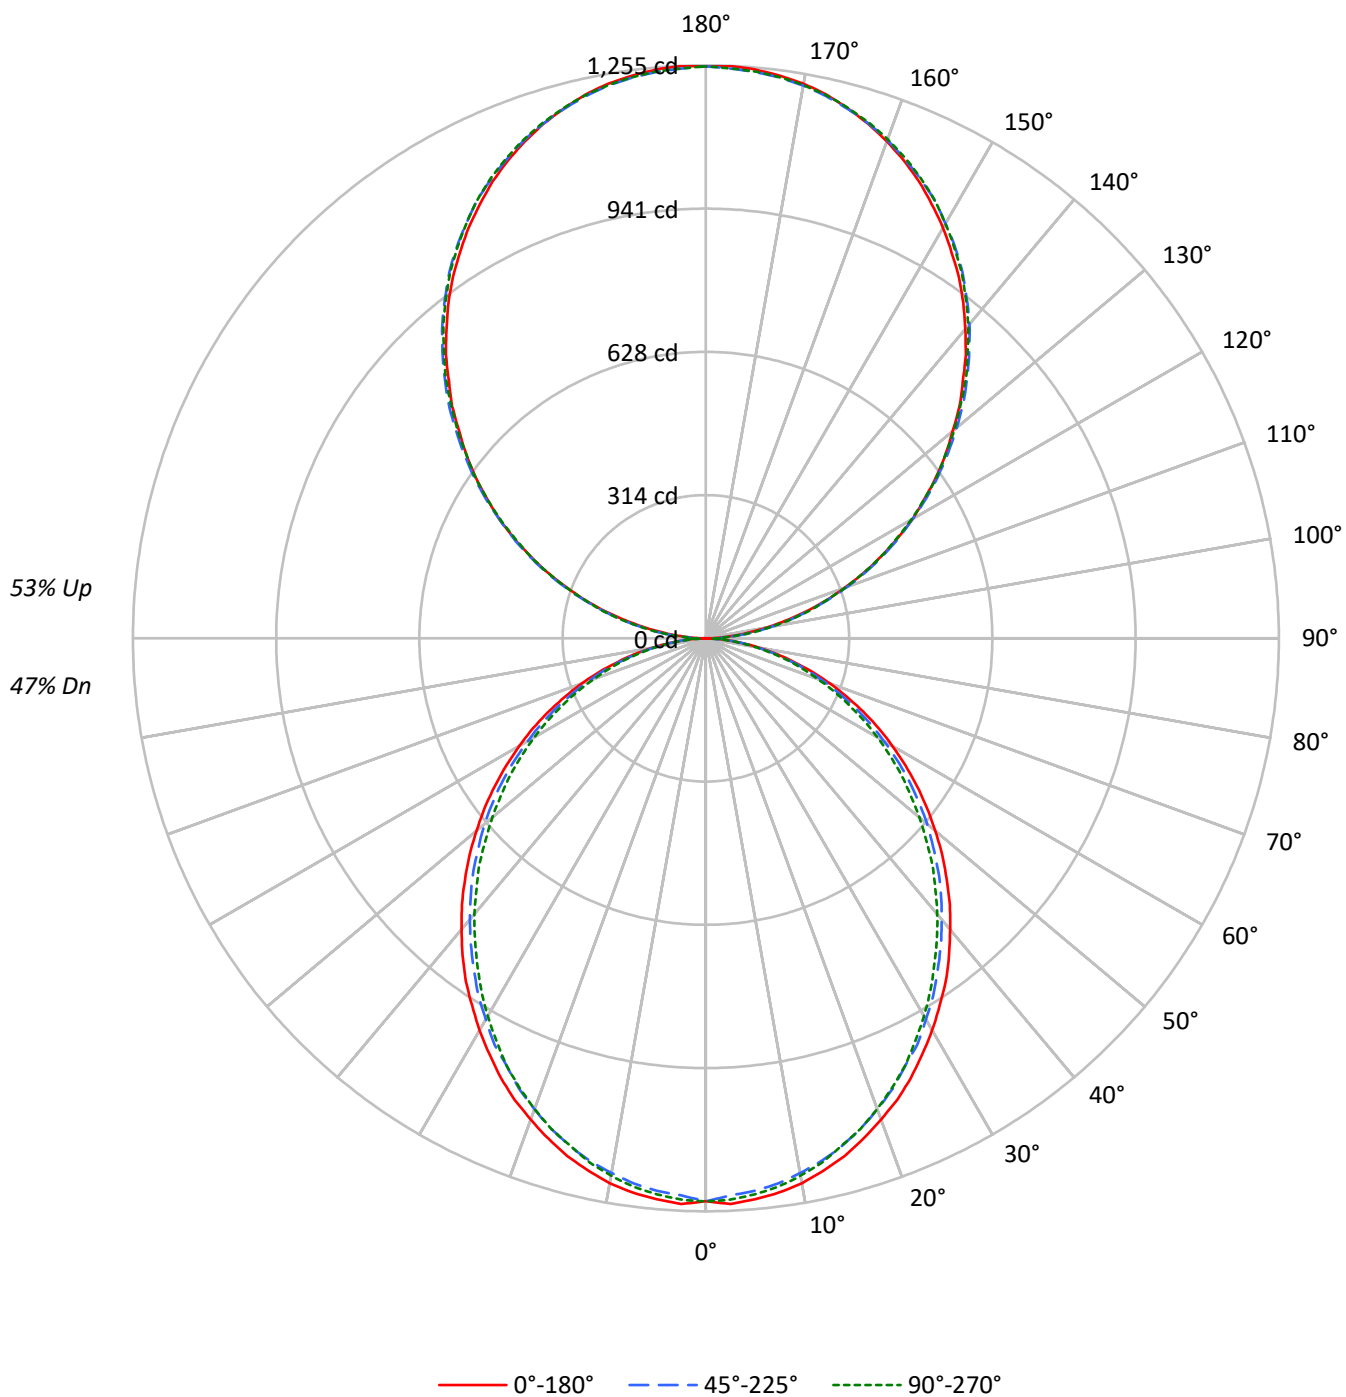

TEST NUMBER: P913812

CATALOG NUMBER: DFN2DIP-PN2F0-040D050US927-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	54	54	54
1	97	93	89	85	89	85	82	79	72	69	67	59	57	56	47	46	45
2	88	81	75	70	81	75	69	65	63	59	56	52	49	47	42	40	38
3	81	71	64	58	74	66	59	54	55	51	47	46	42	39	37	35	32
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28
5	68	56	48	42	62	52	45	39	44	39	34	37	33	29	30	27	24
6	62	50	42	37	57	47	40	34	40	34	30	33	29	26	27	24	21
7	58	45	38	32	53	42	35	30	36	30	26	30	26	23	25	21	19
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	19	17
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15
10	47	35	27	23	43	32	26	21	28	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2671	2671	2671
5°	2671	2627	2647
10°	2644	2586	2607
15°	2601	2538	2547
20°	2544	2473	2486
25°	2488	2397	2416
30°	2418	2325	2328
35°	2351	2242	2235
40°	2270	2157	2147
45°	2189	2073	2055
50°	2100	1983	1950
55°	2006	1880	1853
60°	1900	1759	1741
65°	1783	1631	1610
70°	1635	1477	1467
75°	1433	1291	1330
80°	1185	1054	1079
85°	805	667	676

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2189 cd/sqm

TEST NUMBER: P913812

CATALOG NUMBER: DFN2DIP-PN2F0-040D050US927-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.0	1.7
10°-20°	326.5	4.9
20°-30°	479.8	7.2
30°-40°	557.3	8.4
40°-50°	556.6	8.4
50°-60°	485.3	7.3
60°-70°	358.8	5.4
70°-80°	203.0	3.1
80°-90°	57.1	0.9
90°-100°	77.5	1.2
100°-110°	246.3	3.7
110°-120°	421.5	6.3
120°-130°	554.3	8.3
130°-140°	622.2	9.4
140°-150°	610.1	9.2
150°-160°	511.8	7.7
160°-170°	339.4	5.1
170°-180°	118.6	1.8
0°-30°	922.4	13.9
0°-40°	1479.7	22.3
0°-60°	2521.7	38.0
0°-90°	3140.6	47.3
90°-120°	745.3	11.2
90°-150°	2532.0	38.1
90°-180°	3502.0	52.7
0°-180°	6642.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1233	1233	1233	1233	1233	
5°	1233	1228	1215	1225	1222	117
15°	1174	1167	1151	1156	1150	331
25°	1062	1053	1033	1035	1033	489
35°	916	905	886	878	873	572
45°	746	738	720	707	702	576
55°	564	557	543	529	523	505
65°	381	373	362	351	345	376
75°	199	197	191	184	186	213
85°	49	48	46	43	42	54
90°	1	14	37	35	36	6
95°	55	66	68	68	66	61
105°	227	230	233	234	234	240
115°	423	429	427	426	423	418
125°	615	625	622	618	617	550
135°	796	807	810	809	806	615
145°	966	974	980	981	977	604
155°	1105	1108	1111	1116	1113	508
165°	1202	1201	1201	1208	1203	339
175°	1250	1247	1245	1253	1246	119
180°	1253	1253	1253	1253	1253	

TEST NUMBER: P913812

CATALOG NUMBER: DFN2DIP-PN2F0-040D050US927-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1233.0	1233.0	1233.0	1233.0	1233.0
2.5°	1240.2	1234.2	1221.1	1233.0	1230.7
5°	1233.0	1228.3	1215.2	1224.6	1222.4
7.5°	1224.6	1217.6	1204.5	1214.1	1211.7
10°	1211.7	1203.4	1189.2	1198.6	1195.1
12.5°	1193.8	1186.8	1172.6	1178.5	1176.1
15°	1173.7	1166.6	1151.2	1156.0	1150.1
17.5°	1148.8	1141.8	1126.3	1132.2	1126.3
20°	1121.5	1114.4	1097.9	1101.4	1096.8
22.5°	1094.3	1083.6	1068.2	1068.2	1065.8
25°	1062.2	1052.8	1032.7	1035.0	1032.7
27.5°	1026.7	1018.3	1003.1	999.5	993.6
30°	991.2	981.7	963.9	960.4	955.6
32.5°	953.2	946.2	927.2	920.0	915.2
35°	916.5	904.7	885.7	878.5	872.6
37.5°	875.0	864.3	845.3	837.0	831.1
40°	832.3	822.8	803.7	793.2	788.5
42.5°	790.8	781.2	762.4	750.4	743.4
45°	745.8	737.5	719.6	706.7	701.9
47.5°	701.9	693.6	674.6	661.6	654.5
50°	655.6	649.7	633.1	616.5	610.5
52.5°	610.5	602.3	586.9	573.9	565.5
55°	564.4	557.2	543.0	528.8	522.9
57.5°	518.1	512.2	496.7	482.5	477.8
60°	471.8	467.1	450.6	437.5	434.0
62.5°	426.8	418.5	406.7	394.8	390.1
65°	380.6	373.4	361.6	350.9	345.1
67.5°	333.2	327.2	316.6	308.3	303.6
70°	289.3	284.6	273.9	265.5	260.9
72.5°	244.3	239.5	233.6	225.3	221.7
75°	199.2	196.9	190.8	183.8	186.2
77.5°	158.8	154.1	151.7	148.1	144.7
80°	118.6	117.3	114.9	111.5	109.1
82.5°	80.6	80.6	79.5	74.7	74.7
85°	48.6	47.5	46.3	42.6	41.5
87.5°	21.4	19.0	16.6	13.1	11.8
90°	1.1	13.6	37.0	34.8	35.9
92.5°	23.4	31.7	32.9	34.0	34.0
95°	55.1	65.8	67.6	67.6	65.8
97.5°	91.7	101.6	105.8	105.8	105.8
100°	134.0	142.8	145.8	145.8	144.7
102.5°	178.6	185.1	189.2	190.4	189.2
105°	227.4	230.4	232.7	234.5	234.5
107.5°	275.7	280.2	280.2	281.0	275.7
110°	322.5	328.6	328.6	328.6	325.5

TEST NUMBER: P913812

CATALOG NUMBER: DFN2DIP-PN2F0-040D050US927-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	373.1	379.5	378.4	375.4	373.1
115°	422.9	429.0	427.1	426.0	422.9
117.5°	472.5	480.8	475.5	472.5	469.4
120°	522.3	530.6	522.3	522.3	518.9
122.5°	567.6	578.2	572.9	569.9	567.6
125°	615.2	624.6	621.6	618.2	617.1
127.5°	661.6	673.4	669.2	664.6	661.6
130°	705.1	718.7	716.8	714.5	710.3
132.5°	753.8	764.4	765.2	759.9	756.8
135°	795.7	807.4	809.7	808.6	805.6
137.5°	842.6	852.0	853.9	853.1	848.6
140°	883.7	893.2	898.4	898.4	894.3
142.5°	926.0	935.5	938.5	939.6	935.5
145°	966.1	973.6	979.6	980.8	976.6
147.5°	1002.0	1011.4	1015.9	1017.8	1013.6
150°	1038.9	1045.4	1049.5	1052.9	1049.5
152.5°	1071.8	1078.2	1083.5	1087.7	1083.5
155°	1104.6	1107.6	1111.0	1116.3	1112.9
157.5°	1133.0	1135.2	1137.1	1144.7	1139.4
160°	1158.2	1160.5	1161.7	1168.1	1163.6
162.5°	1181.7	1181.7	1182.8	1190.0	1184.7
165°	1201.7	1200.6	1200.6	1208.2	1202.8
167.5°	1219.8	1216.4	1216.4	1224.0	1218.7
170°	1233.4	1230.4	1229.3	1236.8	1230.4
172.5°	1242.9	1239.8	1238.7	1246.3	1239.8
175°	1250.5	1247.4	1245.2	1252.7	1246.3
177.5°	1254.6	1251.6	1249.3	1255.7	1249.3
180°	1252.7	1252.7	1252.7	1252.7	1252.7

TEST NUMBER: P913812

CATALOG NUMBER: DFN2DIP-PN2F0-040D050US927-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.31	11.15	11.29	12.14	13.45	9.87	10.71	10.85	11.70	13.01
	3H	11.95	12.70	12.94	13.70	15.03	11.47	12.22	12.46	13.22	14.55
	4H	12.52	13.23	13.52	14.24	15.58	12.04	12.75	13.04	13.76	15.09
	6H	12.90	13.56	13.92	14.57	15.92	12.42	13.07	13.43	14.08	15.43
	8H	13.00	13.62	14.02	14.65	16.00	12.51	13.14	13.53	14.16	15.51
	12H	13.04	13.63	14.07	14.65	16.03	12.55	13.14	13.57	14.16	15.53
4H	2H	10.76	11.47	11.77	12.47	13.81	10.41	11.12	11.42	12.12	13.46
	3H	12.60	13.19	13.62	14.23	15.58	12.20	12.79	13.22	13.83	15.18
	4H	13.29	13.84	14.32	14.86	16.24	12.88	13.42	13.91	14.45	15.83
	6H	13.79	14.26	14.83	15.31	16.68	13.37	13.84	14.41	14.89	16.26
	8H	13.93	14.36	14.97	15.41	16.79	13.50	13.94	14.54	14.98	16.37
	12H	13.99	14.39	15.05	15.44	16.84	13.56	13.95	14.61	15.01	16.40
8H	4H	13.48	13.92	14.52	14.96	16.34	13.11	13.55	14.15	14.59	15.98
	6H	14.08	14.45	15.15	15.53	16.91	13.71	14.07	14.77	15.16	16.54
	8H	14.29	14.61	15.36	15.68	17.08	13.91	14.23	14.98	15.30	16.70
	12H	14.41	14.69	15.48	15.75	17.20	14.01	14.29	15.08	15.35	16.80
12H	4H	13.46	13.86	14.52	14.91	16.31	13.10	13.49	14.16	14.55	15.94
	6H	14.11	14.43	15.18	15.50	16.90	13.75	14.06	14.82	15.13	16.54
	8H	14.33	14.61	15.41	15.68	17.12	13.96	14.24	15.04	15.31	16.75