

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916501

Luminaire Tested: DFN2DIP-PN2F0-020D050US930-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916501
REPORT IS A COMBINATION OF REPORTS P901011 AND P897905
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-020D050US930-FLLONL
Description: 2 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5650.1 lumens
Efficiency: N/A
Efficacy: 98.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 57.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916501

CATALOG NUMBER: DFN2DIP-PN2F0-020D050US930-FLLONL

Luminous Intensity Polar Plot

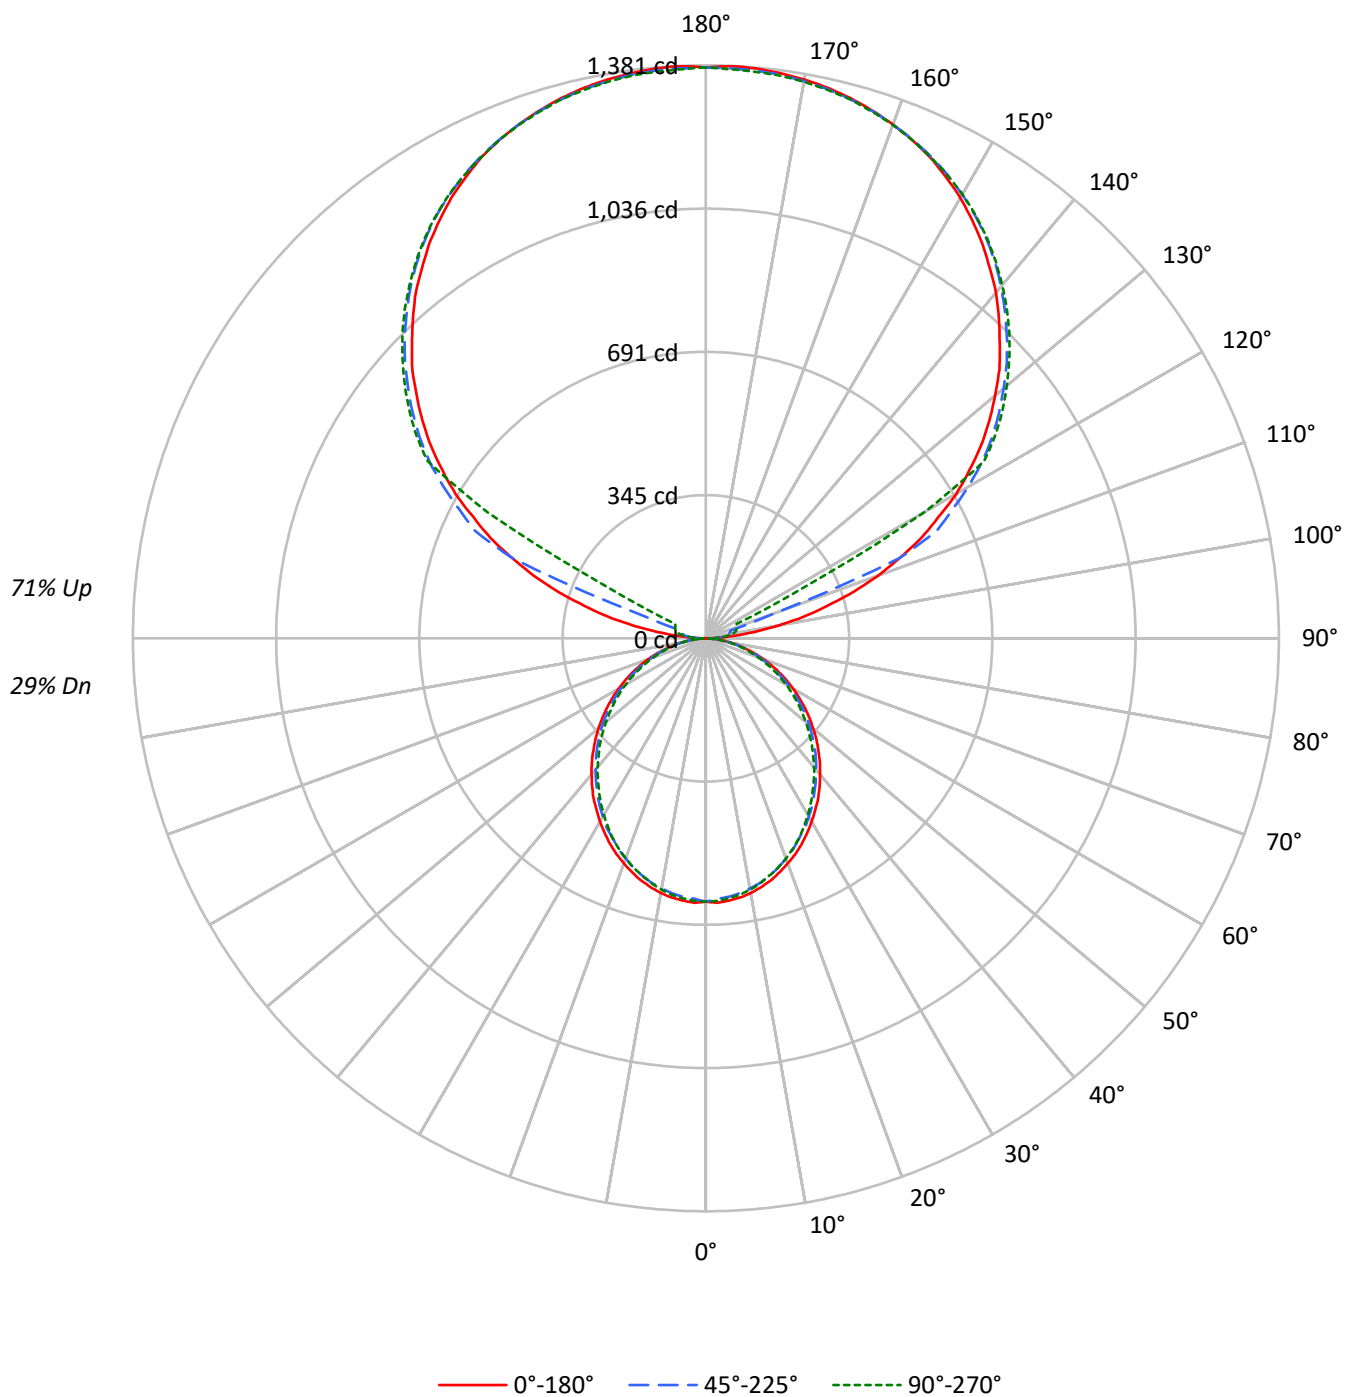

TEST NUMBER: P916501

CATALOG NUMBER: DFN2DIP-PN2F0-020D050US930-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36
1	93	89	85	82	83	80	77	74	62	60	58	47	45	44	32	31	31
2	85	77	72	67	76	70	65	60	55	51	48	41	39	37	28	27	26
3	77	68	61	55	69	61	55	50	48	44	41	36	33	31	25	23	22
4	71	60	53	47	63	54	48	43	43	38	34	32	29	27	22	21	19
5	65	53	46	40	58	48	41	36	38	33	30	29	26	23	20	18	16
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	14
7	55	43	35	30	49	39	32	27	31	26	23	24	20	18	17	14	13
8	51	39	31	26	45	35	29	24	28	23	20	22	18	16	15	13	11
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10
10	44	32	25	21	39	29	23	19	24	19	16	18	15	13	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1374	1374	1374
5°	1374	1352	1362
10°	1361	1331	1342
15°	1339	1306	1311
20°	1309	1273	1279
25°	1280	1233	1243
30°	1244	1197	1198
35°	1210	1154	1150
40°	1168	1110	1104
45°	1126	1067	1058
50°	1081	1021	1004
55°	1032	967	953
60°	978	905	896
65°	917	839	828
70°	842	760	755
75°	737	664	684
80°	611	543	555
85°	413	343	349

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1262 cd/sqm

TEST NUMBER: P916501

CATALOG NUMBER: DFN2DIP-PN2F0-020D050US930-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.7	1.1
10°-20°	168.0	3.0
20°-30°	246.9	4.4
30°-40°	286.8	5.1
40°-50°	286.4	5.1
50°-60°	249.7	4.4
60°-70°	184.6	3.3
70°-80°	104.5	1.8
80°-90°	30.0	0.5
90°-100°	45.4	0.8
100°-110°	169.1	3.0
110°-120°	448.5	7.9
120°-130°	743.9	13.2
130°-140°	790.2	14.0
140°-150°	734.4	13.0
150°-160°	590.4	10.5
160°-170°	380.5	6.7
170°-180°	130.9	2.3
0°-30°	474.7	8.4
0°-40°	761.5	13.5
0°-60°	1297.6	23.0
0°-90°	1616.7	28.6
90°-120°	663.0	11.7
90°-150°	2931.5	51.9
90°-180°	4033.0	71.4
0°-180°	5650.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	634	634	634	634	634	
5°	634	632	625	630	629	60
15°	604	600	592	595	592	170
25°	547	542	531	533	531	252
35°	472	466	456	452	449	295
45°	384	380	370	364	361	296
55°	290	287	279	272	269	260
65°	196	192	186	181	178	194
75°	102	101	98	95	96	109
85°	25	24	24	22	21	28
90°	1	12	20	25	27	5
95°	65	32	39	44	43	77
105°	303	333	61	72	76	323
115°	572	589	614	153	82	564
125°	809	822	841	848	851	722
135°	1002	1018	1026	1036	1034	774
145°	1162	1161	1178	1185	1180	727
155°	1279	1270	1282	1288	1280	589
165°	1348	1342	1345	1352	1345	381
175°	1379	1372	1374	1381	1371	131
180°	1376	1376	1376	1376	1376	

TEST NUMBER: P916501

CATALOG NUMBER: DFN2DIP-PN2F0-020D050US930-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	634.5	634.5	634.5	634.5	634.5
2.5°	638.1	635.1	628.4	634.5	633.3
5°	634.5	632.1	625.3	630.2	629.0
7.5°	630.2	626.6	619.9	624.8	623.5
10°	623.5	619.3	612.0	616.8	615.0
12.5°	614.3	610.7	603.4	606.4	605.2
15°	604.0	600.4	592.4	594.8	591.8
17.5°	591.2	587.6	579.6	582.6	579.6
20°	577.1	573.5	564.9	566.8	564.3
22.5°	563.1	557.7	549.7	549.7	548.5
25°	546.7	541.8	531.4	532.6	531.4
27.5°	528.3	524.1	516.2	514.4	511.3
30°	510.1	505.2	496.0	494.2	491.7
32.5°	490.5	486.9	477.1	473.4	471.0
35°	471.7	465.5	455.8	452.1	449.0
37.5°	450.3	444.7	435.0	430.7	427.6
40°	428.3	423.4	413.6	408.2	405.7
42.5°	406.9	402.0	392.3	386.2	382.5
45°	383.8	379.5	370.3	363.6	361.2
47.5°	361.2	356.9	347.2	340.4	336.8
50°	337.4	334.4	325.8	317.2	314.2
52.5°	314.2	309.9	302.0	295.3	291.1
55°	290.4	286.7	279.4	272.1	269.0
57.5°	266.6	263.6	255.6	248.3	245.8
60°	242.8	240.4	231.9	225.1	223.3
62.5°	219.6	215.3	209.3	203.2	200.7
65°	195.8	192.2	186.1	180.6	177.6
67.5°	171.5	168.4	162.9	158.7	156.2
70°	148.9	146.4	140.9	136.6	134.3
72.5°	125.7	123.3	120.2	115.9	114.1
75°	102.5	101.3	98.2	94.6	95.8
77.5°	81.8	79.3	78.0	76.2	74.4
80°	61.1	60.4	59.2	57.3	56.1
82.5°	41.5	41.5	40.9	38.5	38.5
85°	24.9	24.4	23.8	21.9	21.4
87.5°	11.0	9.8	8.6	6.8	6.1
90°	1.0	11.9	19.9	24.9	26.8
92.5°	24.9	21.0	23.9	25.9	26.8
95°	64.7	31.8	38.8	43.9	42.8
97.5°	116.4	34.9	50.7	53.8	54.7
100°	176.3	39.9	56.7	64.7	66.7
102.5°	241.9	239.9	58.8	69.6	72.7
105°	302.6	332.6	60.7	71.7	75.7
107.5°	373.3	398.1	62.8	73.6	77.7
110°	441.1	461.9	174.2	74.7	78.6

TEST NUMBER: P916501

CATALOG NUMBER: DFN2DIP-PN2F0-020D050US930-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	504.8	522.6	505.7	76.6	79.7
115°	572.4	589.3	614.2	153.4	81.7
117.5°	631.1	651.0	668.1	525.5	264.8
120°	696.8	711.8	729.7	741.7	607.2
122.5°	752.5	768.5	788.5	794.4	795.5
125°	809.3	822.3	841.2	848.2	851.2
127.5°	861.0	875.0	890.1	899.9	900.9
130°	909.9	925.9	936.7	947.7	946.8
132.5°	959.7	972.7	983.5	992.5	991.6
135°	1001.5	1017.5	1026.3	1036.4	1034.4
137.5°	1045.2	1057.2	1067.2	1077.2	1074.2
140°	1088.0	1096.1	1106.9	1115.9	1111.0
142.5°	1124.0	1131.0	1143.9	1151.8	1146.8
145°	1161.8	1160.7	1177.6	1184.6	1179.7
147.5°	1194.6	1191.6	1208.5	1213.5	1209.6
150°	1226.5	1219.5	1235.4	1241.4	1236.4
152.5°	1253.3	1245.4	1260.3	1266.3	1259.3
155°	1279.2	1270.3	1282.2	1288.2	1280.3
157.5°	1300.1	1292.2	1301.1	1308.1	1300.1
160°	1318.1	1312.1	1318.1	1324.0	1317.0
162.5°	1333.9	1328.0	1332.9	1339.9	1331.0
165°	1347.9	1342.0	1344.9	1351.8	1344.9
167.5°	1358.9	1352.8	1355.9	1362.9	1353.9
170°	1367.8	1361.8	1363.8	1370.8	1361.8
172.5°	1373.8	1367.8	1369.9	1376.8	1367.8
175°	1378.8	1371.7	1373.8	1380.7	1370.8
177.5°	1380.7	1373.8	1374.8	1381.8	1372.8
180°	1375.7	1375.7	1375.7	1375.7	1375.7

TEST NUMBER: P916501

CATALOG NUMBER: DFN2DIP-PN2F0-020D050US930-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.85	6.55	6.98	7.67	9.21	5.42	6.11	6.54	7.23	8.77
	3H	7.48	8.11	8.61	9.23	10.79	7.00	7.62	8.13	8.75	10.31
	4H	8.05	8.64	9.19	9.76	11.33	7.56	8.16	8.70	9.28	10.85
	6H	8.42	8.97	9.57	10.10	11.68	7.94	8.48	9.08	9.61	11.19
	8H	8.52	9.03	9.67	10.18	11.75	8.03	8.55	9.18	9.69	11.26
	12H	8.55	9.04	9.71	10.18	11.77	8.06	8.55	9.21	9.68	11.28
4H	2H	6.28	6.88	7.43	8.00	9.57	5.93	6.53	7.08	7.65	9.22
	3H	8.11	8.61	9.26	9.76	11.34	7.71	8.21	8.86	9.36	10.94
	4H	8.80	9.26	9.96	10.40	12.00	8.39	8.84	9.54	9.98	11.58
	6H	9.29	9.68	10.45	10.84	12.43	8.87	9.26	10.03	10.42	12.01
	8H	9.43	9.79	10.59	10.94	12.55	9.00	9.36	10.16	10.52	12.12
	12H	9.48	9.81	10.66	10.97	12.59	9.05	9.38	10.22	10.54	12.15
8H	4H	8.98	9.34	10.13	10.49	12.10	8.61	8.97	9.77	10.12	11.73
	6H	9.58	9.88	10.75	11.07	12.67	9.20	9.50	10.38	10.70	12.30
	8H	9.78	10.04	10.97	11.22	12.84	9.40	9.66	10.58	10.83	12.46
	12H	9.89	10.12	11.08	11.29	12.95	9.49	9.72	10.68	10.89	12.55
12H	4H	8.95	9.28	10.13	10.44	12.06	8.59	8.92	9.76	10.08	11.70
	6H	9.60	9.86	10.78	11.03	12.66	9.23	9.50	10.42	10.67	12.29
	8H	9.82	10.05	11.01	11.22	12.88	9.45	9.68	10.64	10.85	12.50