

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P919244

Luminaire Tested: DFN2DIP-PN2F0-030D040US935-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P919244
REPORT IS A COMBINATION OF REPORTS P899483 AND P896349
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-030D040US935-FLLFLL
Description: 2 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5605.1 lumens
Efficiency: N/A
Efficacy: 95.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 58.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P919244

CATALOG NUMBER: DFN2DIP-PN2F0-030D040US935-FLLFLL

Luminous Intensity Polar Plot

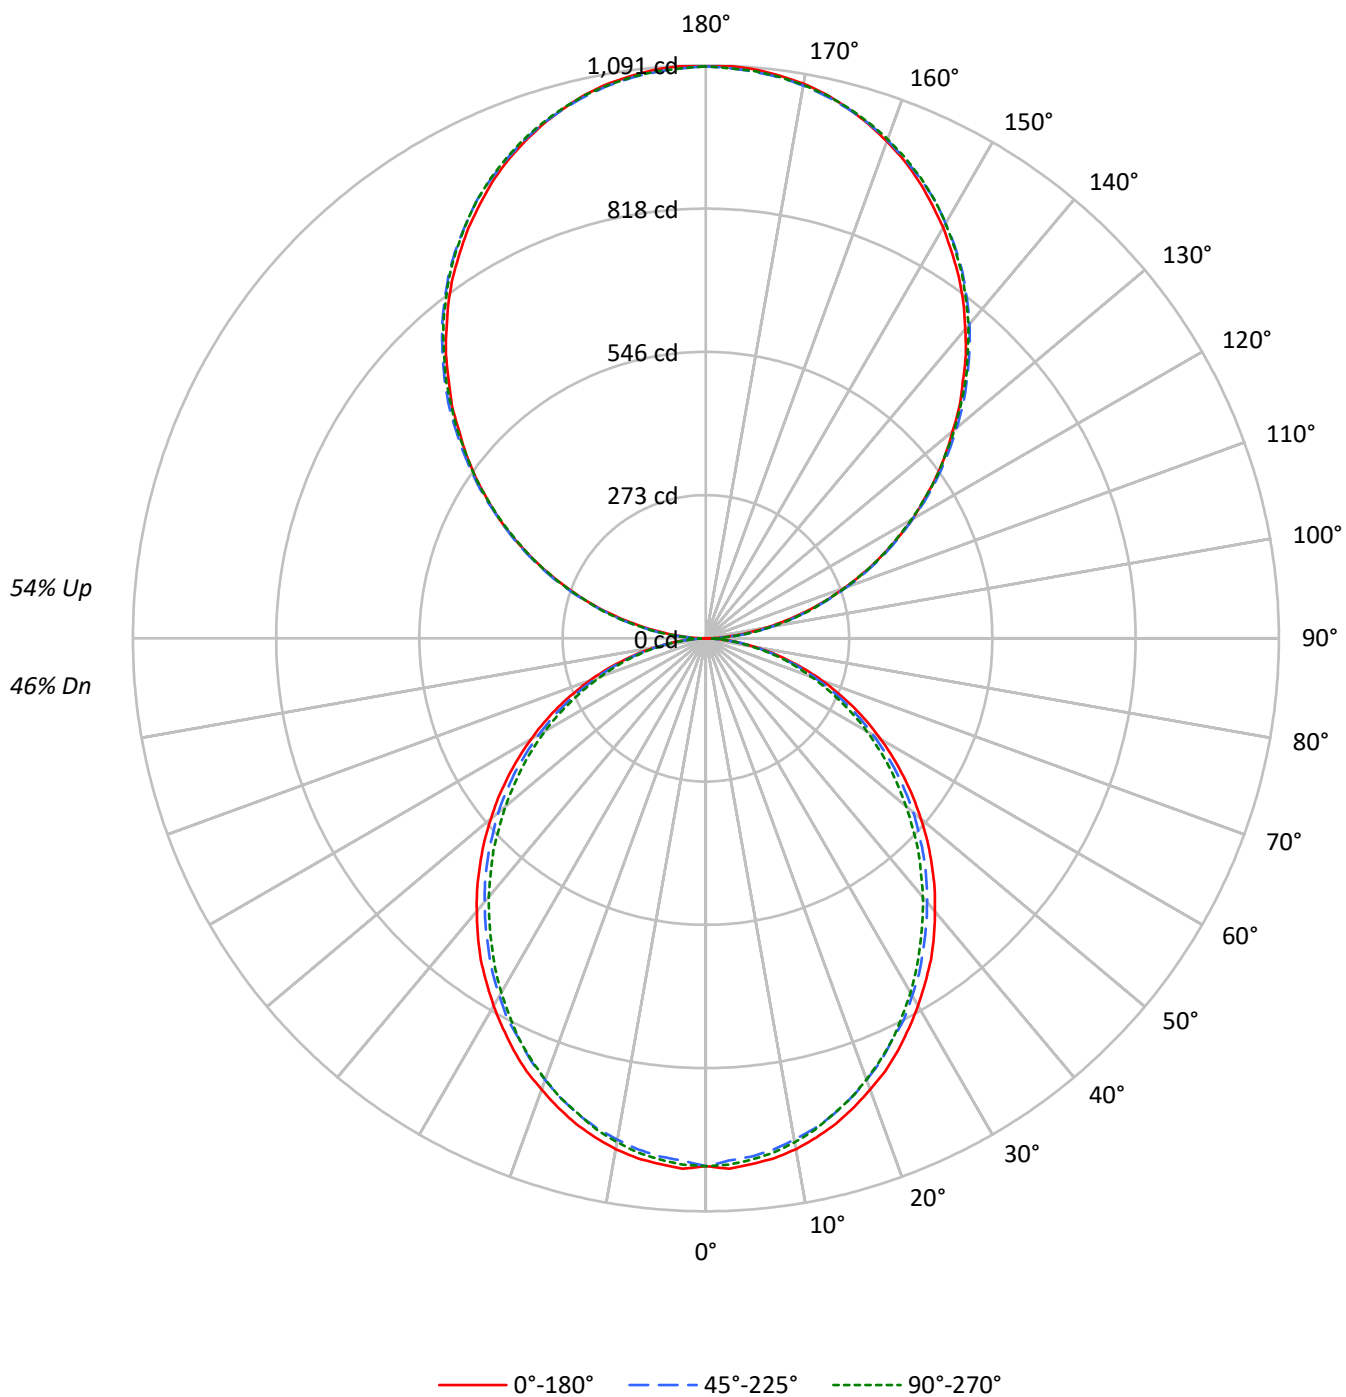

TEST NUMBER: P919244

CATALOG NUMBER: DFN2DIP-PN2F0-030D040US935-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52
1	97	93	89	85	89	85	82	79	71	69	66	58	56	55	46	45	44
2	88	81	75	70	81	74	69	65	62	58	55	51	48	46	41	39	37
3	80	71	64	58	73	65	59	54	55	50	46	45	42	39	36	34	32
4	74	63	55	49	67	58	51	46	49	43	39	40	36	33	32	29	27
5	67	56	48	42	62	52	45	39	44	38	34	36	32	29	29	26	24
6	62	50	42	36	57	46	39	34	39	34	30	33	28	25	26	23	21
7	57	45	37	32	53	42	35	30	36	30	26	30	25	22	24	21	19
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	17
9	50	37	30	25	45	35	28	24	30	24	21	25	21	18	20	17	15
10	46	34	27	22	42	32	25	21	27	22	19	23	19	16	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2177	2177	2177
5°	2177	2142	2158
10°	2156	2108	2125
15°	2120	2069	2077
20°	2074	2016	2027
25°	2028	1954	1969
30°	1971	1896	1898
35°	1917	1828	1822
40°	1850	1759	1750
45°	1784	1690	1675
50°	1711	1617	1590
55°	1635	1532	1511
60°	1549	1433	1419
65°	1454	1330	1312
70°	1333	1204	1196
75°	1168	1053	1084
80°	966	859	879
85°	656	543	551

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1784 cd/sqm

TEST NUMBER: P919244

CATALOG NUMBER: DFN2DIP-PN2F0-030D040US935-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.6	1.7
10°-20°	266.2	4.7
20°-30°	391.1	7.0
30°-40°	454.3	8.1
40°-50°	453.7	8.1
50°-60°	395.6	7.1
60°-70°	292.5	5.2
70°-80°	165.5	3.0
80°-90°	46.8	0.8
90°-100°	67.4	1.2
100°-110°	214.2	3.8
110°-120°	366.5	6.5
120°-130°	482.0	8.6
130°-140°	541.0	9.7
140°-150°	530.5	9.5
150°-160°	445.0	7.9
160°-170°	295.1	5.3
170°-180°	103.2	1.8
0°-30°	751.9	13.4
0°-40°	1206.2	21.5
0°-60°	2055.6	36.7
0°-90°	2560.3	45.7
90°-120°	648.0	11.6
90°-150°	2201.5	39.3
90°-180°	3045.0	54.3
0°-180°	5605.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1005	1005	1005	1005	1005	
5°	1005	1001	991	998	996	95
15°	957	951	938	942	938	269
25°	866	858	842	844	842	398
35°	747	737	722	716	711	467
45°	608	601	587	576	572	469
55°	460	454	443	431	426	411
65°	310	304	295	286	281	307
75°	162	160	156	150	152	173
85°	40	39	38	35	34	44
90°	1	12	32	30	31	5
95°	48	57	59	59	57	53
105°	198	200	202	204	204	209
115°	368	373	371	370	368	364
125°	535	543	540	538	537	478
135°	692	702	704	703	700	535
145°	840	846	852	853	849	525
155°	960	963	966	971	968	442
165°	1045	1044	1044	1050	1046	295
175°	1087	1085	1083	1089	1084	103
180°	1089	1089	1089	1089	1089	

TEST NUMBER: P919244

CATALOG NUMBER: DFN2DIP-PN2F0-030D040US935-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1005.0	1005.0	1005.0	1005.0	1005.0
2.5°	1010.9	1006.1	995.4	1005.0	1003.2
5°	1005.0	1001.3	990.6	998.3	996.4
7.5°	998.3	992.6	981.9	989.7	987.7
10°	987.7	980.9	969.4	977.1	974.2
12.5°	973.2	967.4	955.9	960.6	958.7
15°	956.7	951.1	938.4	942.3	937.5
17.5°	936.4	930.7	918.1	922.9	918.1
20°	914.2	908.4	894.9	897.8	894.0
22.5°	892.1	883.4	870.7	870.7	868.7
25°	865.9	858.2	841.8	843.7	841.8
27.5°	836.9	830.1	817.6	814.8	809.9
30°	808.0	800.2	785.7	782.8	778.9
32.5°	777.1	771.3	755.8	749.9	746.1
35°	747.1	737.4	721.9	716.1	711.3
37.5°	713.3	704.6	689.1	682.3	677.4
40°	678.5	670.7	655.2	646.6	642.7
42.5°	644.6	636.9	621.5	611.7	606.0
45°	608.0	601.1	586.6	576.0	572.1
47.5°	572.1	565.4	549.9	539.2	533.5
50°	534.4	529.6	516.1	502.6	497.7
52.5°	497.7	490.9	478.5	467.8	461.0
55°	460.1	454.3	442.6	431.1	426.3
57.5°	422.3	417.5	404.9	393.3	389.4
60°	384.6	380.8	367.3	356.6	353.8
62.5°	347.9	341.1	331.5	321.8	318.0
65°	310.3	304.4	294.8	286.1	281.3
67.5°	271.6	266.7	258.0	251.3	247.5
70°	235.8	232.0	223.3	216.5	212.7
72.5°	199.1	195.2	190.4	183.7	180.8
75°	162.3	160.5	155.6	149.8	151.8
77.5°	129.5	125.6	123.6	120.8	118.0
80°	96.7	95.7	93.7	90.8	88.9
82.5°	65.7	65.7	64.8	60.9	60.9
85°	39.6	38.7	37.7	34.8	33.8
87.5°	17.4	15.5	13.5	10.7	9.6
90°	0.9	11.8	32.2	30.2	31.2
92.5°	20.3	27.6	28.6	29.5	29.5
95°	48.0	57.2	58.8	58.8	57.2
97.5°	79.8	88.3	92.0	92.0	92.0
100°	116.6	124.2	126.7	126.7	125.8
102.5°	155.3	160.9	164.5	165.5	164.5
105°	197.7	200.3	202.2	203.9	203.9
107.5°	239.7	243.7	243.7	244.3	239.7
110°	280.4	285.7	285.7	285.7	283.1

TEST NUMBER: P919244

CATALOG NUMBER: DFN2DIP-PN2F0-030D040US935-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	324.4	330.0	329.0	326.4	324.4
115°	367.7	373.1	371.3	370.4	367.7
117.5°	410.8	418.0	413.5	410.8	408.2
120°	454.2	461.3	454.2	454.2	451.2
122.5°	493.5	502.7	498.2	495.5	493.5
125°	534.9	543.1	540.5	537.5	536.6
127.5°	575.3	585.5	581.9	577.9	575.3
130°	613.0	624.9	623.3	621.3	617.7
132.5°	655.4	664.6	665.3	660.6	658.1
135°	691.9	702.1	704.0	703.0	700.4
137.5°	732.6	740.8	742.4	741.7	737.9
140°	768.4	776.6	781.2	781.2	777.6
142.5°	805.2	813.4	816.0	817.0	813.4
145°	840.0	846.5	851.8	852.8	849.2
147.5°	871.2	879.3	883.3	884.9	881.3
150°	903.4	909.0	912.6	915.5	912.6
152.5°	931.9	937.5	942.1	945.7	942.1
155°	960.4	963.1	966.0	970.7	967.7
157.5°	985.2	987.0	988.7	995.3	990.7
160°	1007.1	1009.1	1010.0	1015.6	1011.7
162.5°	1027.4	1027.4	1028.5	1034.7	1030.1
165°	1044.9	1043.9	1043.9	1050.4	1045.9
167.5°	1060.7	1057.6	1057.6	1064.3	1059.6
170°	1072.5	1069.8	1068.8	1075.4	1069.8
172.5°	1080.6	1078.1	1077.0	1083.7	1078.1
175°	1087.3	1084.6	1082.6	1089.2	1083.7
177.5°	1090.9	1088.2	1086.2	1091.8	1086.2
180°	1089.2	1089.2	1089.2	1089.2	1089.2

TEST NUMBER: P919244

CATALOG NUMBER: DFN2DIP-PN2F0-030D040US935-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.44	10.27	10.44	11.27	12.60	9.00	9.83	10.00	10.83	12.17
	3H	11.08	11.82	12.08	12.83	14.18	10.60	11.34	11.60	12.35	13.71
	4H	11.65	12.35	12.67	13.37	14.73	11.17	11.87	12.19	12.89	14.25
	6H	12.03	12.68	13.06	13.70	15.07	11.55	12.19	12.58	13.21	14.59
	8H	12.13	12.74	13.16	13.78	15.15	11.64	12.26	12.68	13.30	14.66
	12H	12.17	12.75	13.21	13.78	15.18	11.68	12.26	12.72	13.29	14.69
4H	2H	9.89	10.59	10.91	11.61	12.97	9.54	10.24	10.56	11.26	12.62
	3H	11.73	12.31	12.76	13.36	14.73	11.33	11.91	12.36	12.96	14.33
	4H	12.42	12.96	13.46	14.00	15.39	12.01	12.55	13.05	13.58	14.98
	6H	12.92	13.38	13.97	14.44	15.83	12.50	12.96	13.55	14.02	15.41
	8H	13.06	13.49	14.11	14.54	15.95	12.63	13.06	13.68	14.12	15.52
	12H	13.12	13.51	14.19	14.58	15.99	12.69	13.07	13.75	14.14	15.55
8H	4H	12.61	13.04	13.66	14.09	15.50	12.24	12.67	13.29	13.72	15.13
	6H	13.21	13.57	14.29	14.66	16.07	12.84	13.19	13.91	14.29	15.69
	8H	13.42	13.73	14.50	14.81	16.23	13.04	13.35	14.12	14.43	15.85
	12H	13.54	13.81	14.62	14.88	16.35	13.14	13.41	14.22	14.49	15.95
12H	4H	12.59	12.98	13.66	14.04	15.46	12.23	12.62	13.30	13.68	15.10
	6H	13.24	13.55	14.32	14.63	16.05	12.87	13.19	13.96	14.27	15.69
	8H	13.46	13.74	14.55	14.81	16.28	13.09	13.37	14.18	14.44	15.91