

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P919251

Luminaire Tested: DFN2DIP-PN2F0-030D050US935-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P919251
REPORT IS A COMBINATION OF REPORTS P901014 AND P897905
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-030D050US935-RLLONL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6457.5 lumens
Efficiency: N/A
Efficacy: 93.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 69
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P919251

CATALOG NUMBER: DFN2DIP-PN2F0-030D050US935-RLLONL

Luminous Intensity Polar Plot

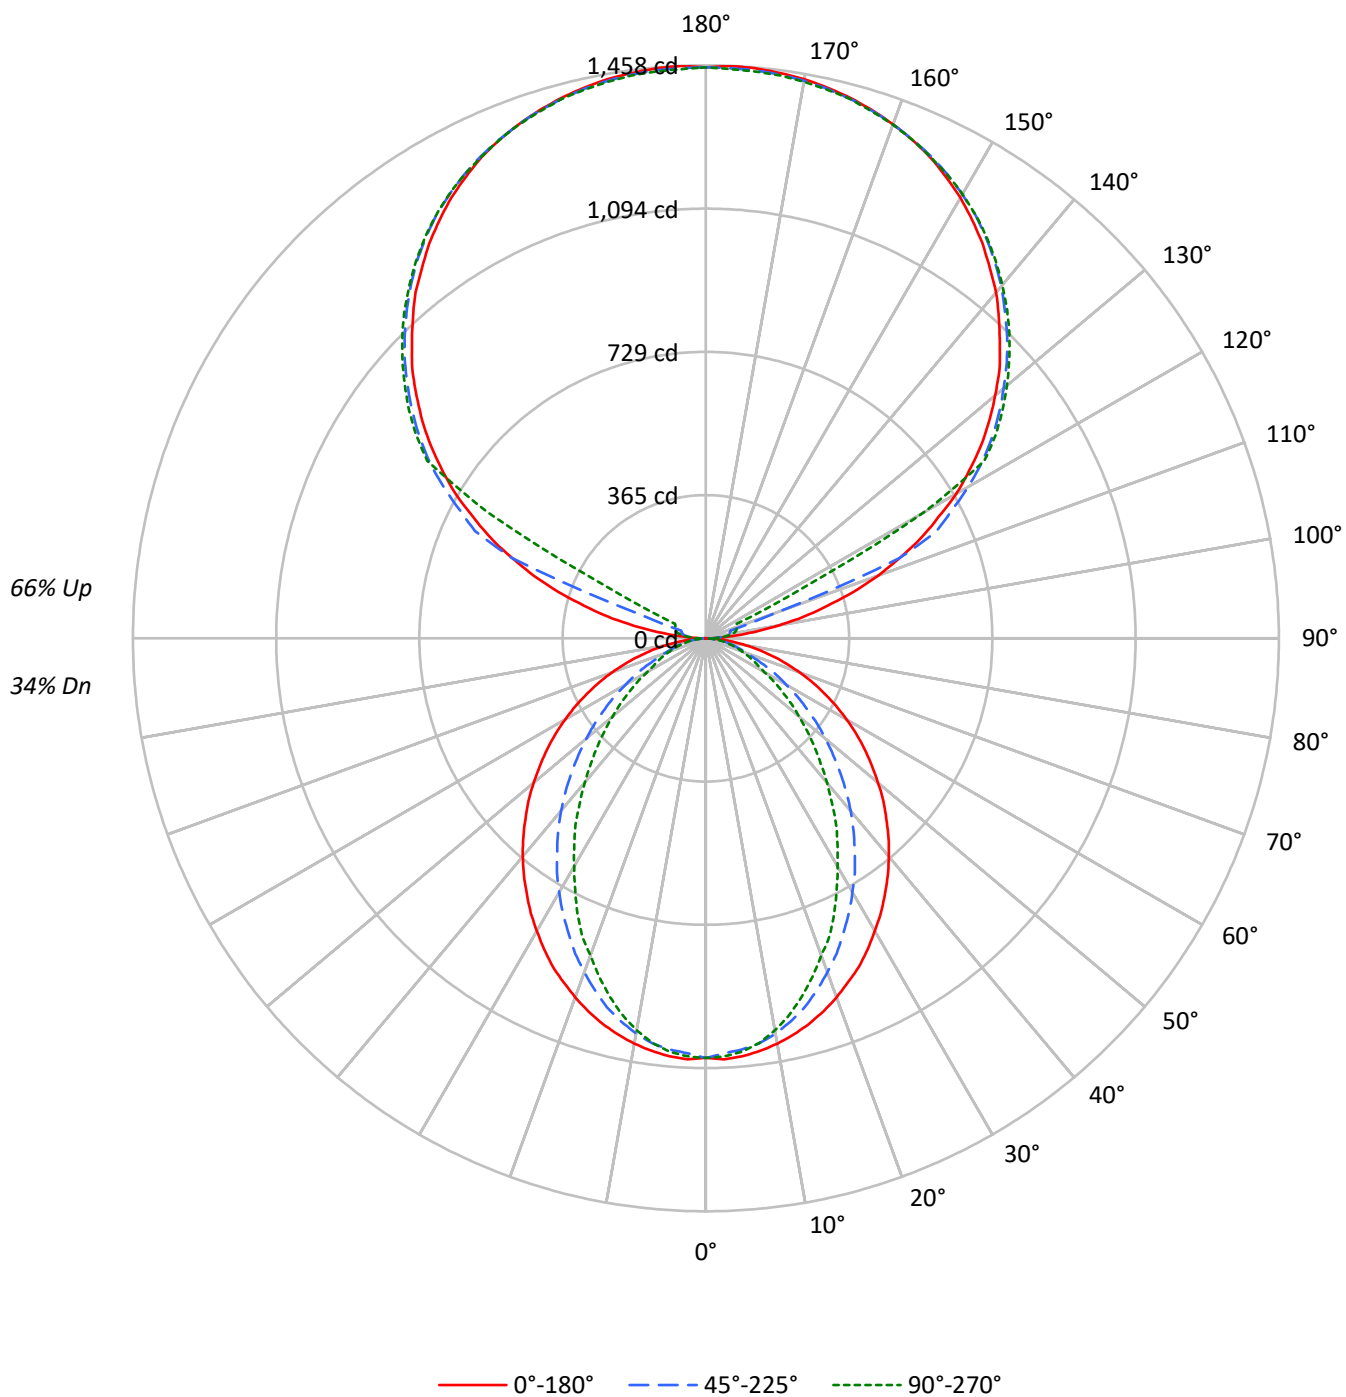

TEST NUMBER: P919251

CATALOG NUMBER: DFN2DIP-PN2F0-030D050US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41
1	95	90	87	83	85	82	79	76	66	64	62	51	49	48	37	36	36
2	86	79	74	69	78	72	67	63	58	54	52	45	43	41	33	32	30
3	79	70	63	58	71	63	58	53	51	47	44	40	37	35	30	28	26
4	72	62	55	49	65	56	50	45	46	41	37	36	33	30	27	25	23
5	66	55	48	42	60	50	44	39	41	36	32	32	29	26	24	22	20
6	61	50	42	36	55	45	39	34	37	32	28	29	26	23	22	20	18
7	57	45	37	32	51	41	34	30	34	29	25	27	23	20	20	18	16
8	52	41	33	28	47	37	31	26	31	26	22	24	21	18	19	16	14
9	49	37	30	25	44	34	28	23	28	23	20	22	19	16	17	15	13
10	46	34	27	22	41	31	25	21	26	21	18	21	17	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2312	2312	2312
5°	2312	2271	2286
10°	2285	2221	2209
15°	2250	2143	2091
20°	2205	2037	1947
25°	2159	1920	1808
30°	2098	1799	1633
35°	2037	1671	1480
40°	1976	1538	1305
45°	1905	1391	1146
50°	1832	1244	991
55°	1754	1087	842
60°	1665	924	690
65°	1562	758	617
70°	1436	604	554
75°	1278	523	497
80°	1052	425	420
85°	688	264	298

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1905 cd/sqm

TEST NUMBER: P919251

CATALOG NUMBER: DFN2DIP-PN2F0-030D050US935-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.1	1.5
10°-20°	274.7	4.3
20°-30°	385.6	6.0
30°-40°	420.3	6.5
40°-50°	386.3	6.0
50°-60°	303.4	4.7
60°-70°	197.5	3.1
70°-80°	101.7	1.6
80°-90°	28.5	0.4
90°-100°	47.9	0.7
100°-110°	178.6	2.8
110°-120°	473.7	7.3
120°-130°	785.6	12.2
130°-140°	834.5	12.9
140°-150°	775.6	12.0
150°-160°	623.5	9.7
160°-170°	401.8	6.2
170°-180°	138.3	2.1
0°-30°	760.3	11.8
0°-40°	1180.7	18.3
0°-60°	1870.4	29.0
0°-90°	2198.1	34.0
90°-120°	700.2	10.8
90°-150°	3095.8	47.9
90°-180°	4259.0	66.0
0°-180°	6457.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1068	1068	1068	1068	1068	
5°	1068	1063	1050	1059	1056	101
15°	1015	1005	972	954	944	286
25°	922	891	827	787	773	424
35°	794	745	660	599	578	497
45°	649	584	483	414	391	501
55°	494	418	314	256	238	441
65°	333	255	168	135	132	330
75°	178	110	77	70	70	188
85°	42	21	18	18	18	48
90°	1	13	21	26	28	6
95°	68	34	41	46	45	81
105°	320	351	64	76	80	342
115°	604	622	649	162	86	595
125°	855	868	888	896	899	762
135°	1058	1074	1084	1094	1092	817
145°	1227	1226	1244	1251	1246	767
155°	1351	1342	1354	1360	1352	622
165°	1423	1417	1420	1428	1420	402
175°	1456	1449	1451	1458	1448	139
180°	1453	1453	1453	1453	1453	

TEST NUMBER: P919251

CATALOG NUMBER: DFN2DIP-PN2F0-030D050US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1067.6	1067.6	1067.6	1067.6	1067.6
2.5°	1072.4	1067.6	1056.9	1066.6	1064.7
5°	1067.6	1062.7	1050.2	1058.9	1055.9
7.5°	1058.9	1053.1	1039.6	1043.4	1038.5
10°	1047.2	1040.5	1021.2	1018.2	1012.5
12.5°	1032.8	1024.1	998.0	992.2	981.5
15°	1015.4	1004.7	971.9	953.6	943.9
17.5°	995.1	979.6	939.0	917.8	902.3
20°	971.9	952.5	904.2	880.2	858.8
22.5°	946.8	924.5	868.5	835.7	821.2
25°	921.7	890.7	827.0	787.4	772.8
27.5°	891.7	858.8	788.3	743.0	720.7
30°	859.9	823.1	745.8	696.6	670.5
32.5°	828.9	784.5	705.3	647.3	623.1
35°	794.2	744.8	659.9	599.0	577.7
37.5°	760.3	707.1	617.3	550.6	526.6
40°	724.6	666.7	572.9	504.3	479.2
42.5°	687.9	626.1	528.5	456.9	432.8
45°	649.3	584.4	483.1	414.4	391.2
47.5°	612.5	544.0	439.6	370.9	349.7
50°	572.0	503.3	397.1	330.4	310.1
52.5°	532.3	459.9	356.5	292.7	274.4
55°	493.6	418.3	313.9	256.1	237.7
57.5°	454.1	376.8	276.4	222.2	206.7
60°	413.5	336.2	236.7	187.4	172.0
62.5°	373.9	296.6	202.9	156.5	148.9
65°	333.3	255.0	168.1	135.3	132.3
67.5°	294.7	216.4	135.3	118.8	115.9
70°	254.1	178.7	112.0	102.4	98.5
72.5°	215.4	143.9	93.7	86.0	84.0
75°	177.7	110.1	77.3	70.5	69.6
77.5°	140.1	78.2	60.9	57.0	55.0
80°	105.3	56.1	46.3	42.5	42.5
82.5°	73.4	37.7	31.9	30.0	30.0
85°	41.5	21.2	18.3	18.3	18.3
87.5°	15.5	7.7	7.7	6.8	6.8
90°	1.0	12.6	21.0	26.3	28.3
92.5°	26.3	22.1	25.2	27.4	28.3
95°	68.3	33.6	41.0	46.3	45.2
97.5°	123.0	36.9	53.6	56.8	57.8
100°	186.1	42.1	59.9	68.3	70.4
102.5°	255.5	253.4	62.1	73.5	76.8
105°	319.6	351.2	64.1	75.7	79.9
107.5°	394.3	420.4	66.3	77.7	82.1
110°	465.8	487.8	184.0	78.9	83.0

TEST NUMBER: P919251

CATALOG NUMBER: DFN2DIP-PN2F0-030D050US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	533.0	551.9	534.1	80.9	84.1
115°	604.5	622.3	648.7	162.0	86.3
117.5°	666.5	687.5	705.5	555.0	279.7
120°	735.9	751.7	770.6	783.2	641.3
122.5°	794.7	811.6	832.7	839.0	840.1
125°	854.6	868.4	888.4	895.7	898.9
127.5°	909.3	924.0	940.0	950.4	951.4
130°	960.9	977.7	989.2	1000.8	999.9
132.5°	1013.5	1027.2	1038.6	1048.2	1047.1
135°	1057.6	1074.5	1083.8	1094.5	1092.3
137.5°	1103.8	1116.5	1127.0	1137.6	1134.5
140°	1149.0	1157.5	1169.0	1178.4	1173.3
142.5°	1187.0	1194.4	1208.0	1216.3	1211.1
145°	1226.9	1225.8	1243.6	1251.0	1245.8
147.5°	1261.5	1258.3	1276.3	1281.5	1277.4
150°	1295.2	1287.9	1304.7	1311.0	1305.7
152.5°	1323.5	1315.2	1330.9	1337.3	1329.9
155°	1350.9	1341.5	1354.1	1360.4	1352.0
157.5°	1372.9	1364.6	1374.1	1381.5	1372.9
160°	1392.0	1385.6	1392.0	1398.2	1390.9
162.5°	1408.7	1402.5	1407.6	1415.0	1405.6
165°	1423.4	1417.2	1420.3	1427.6	1420.3
167.5°	1435.0	1428.7	1431.9	1439.2	1429.8
170°	1444.5	1438.1	1440.3	1447.6	1438.1
172.5°	1450.8	1444.5	1446.6	1454.0	1444.5
175°	1456.0	1448.6	1450.8	1458.1	1447.6
177.5°	1458.1	1450.8	1451.9	1459.2	1449.7
180°	1452.8	1452.8	1452.8	1452.8	1452.8

TEST NUMBER: P919251

CATALOG NUMBER: DFN2DIP-PN2F0-030D050US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.24	8.95	9.33	10.04	11.52	4.20	4.92	5.29	6.00	7.49
	3H	9.89	10.52	10.98	11.62	13.12	5.37	6.01	6.46	7.10	8.60
	4H	10.47	11.08	11.58	12.17	13.68	5.80	6.41	6.91	7.50	9.01
	6H	10.87	11.43	11.99	12.53	14.05	6.10	6.66	7.22	7.75	9.27
	8H	10.99	11.52	12.11	12.63	14.14	6.18	6.71	7.30	7.82	9.33
	12H	11.04	11.54	12.16	12.65	14.18	6.21	6.71	7.34	7.82	9.36
4H	2H	8.24	8.84	9.35	9.94	11.44	4.77	5.38	5.89	6.47	7.98
	3H	10.03	10.54	11.15	11.66	13.18	6.09	6.60	7.22	7.72	9.24
	4H	10.70	11.17	11.83	12.28	13.82	6.62	7.09	7.75	8.20	9.74
	6H	11.19	11.59	12.32	12.72	14.26	7.02	7.41	8.15	8.55	10.08
	8H	11.35	11.72	12.49	12.85	14.40	7.14	7.50	8.27	8.63	10.18
	12H	11.43	11.77	12.58	12.90	14.46	7.19	7.52	8.33	8.66	10.21
8H	4H	10.66	11.03	11.79	12.15	13.70	6.88	7.25	8.01	8.38	9.93
	6H	11.20	11.50	12.35	12.67	14.22	7.37	7.68	8.53	8.85	10.39
	8H	11.40	11.67	12.56	12.81	14.38	7.55	7.82	8.71	8.96	10.53
	12H	11.52	11.75	12.68	12.90	14.50	7.65	7.89	8.81	9.03	10.63
12H	4H	10.60	10.94	11.75	12.08	13.63	6.88	7.21	8.03	8.35	9.90
	6H	11.17	11.44	12.33	12.59	14.15	7.42	7.68	8.57	8.83	10.40
	8H	11.37	11.61	12.53	12.75	14.35	7.61	7.84	8.77	8.99	10.59