

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P919307

Luminaire Tested: DFN2DIP-PN2F0-060D040US935-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P919307
REPORT IS A COMBINATION OF REPORTS P901010 AND P897905
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-060D040US935-RLLONL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7800.6 lumens
Efficiency: N/A
Efficacy: 81.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 95.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.946
Total Harmonic Distortion (THDi): 0.132
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P919307

CATALOG NUMBER: DFN2DIP-PN2F0-060D040US935-RLLONL

Luminous Intensity Polar Plot

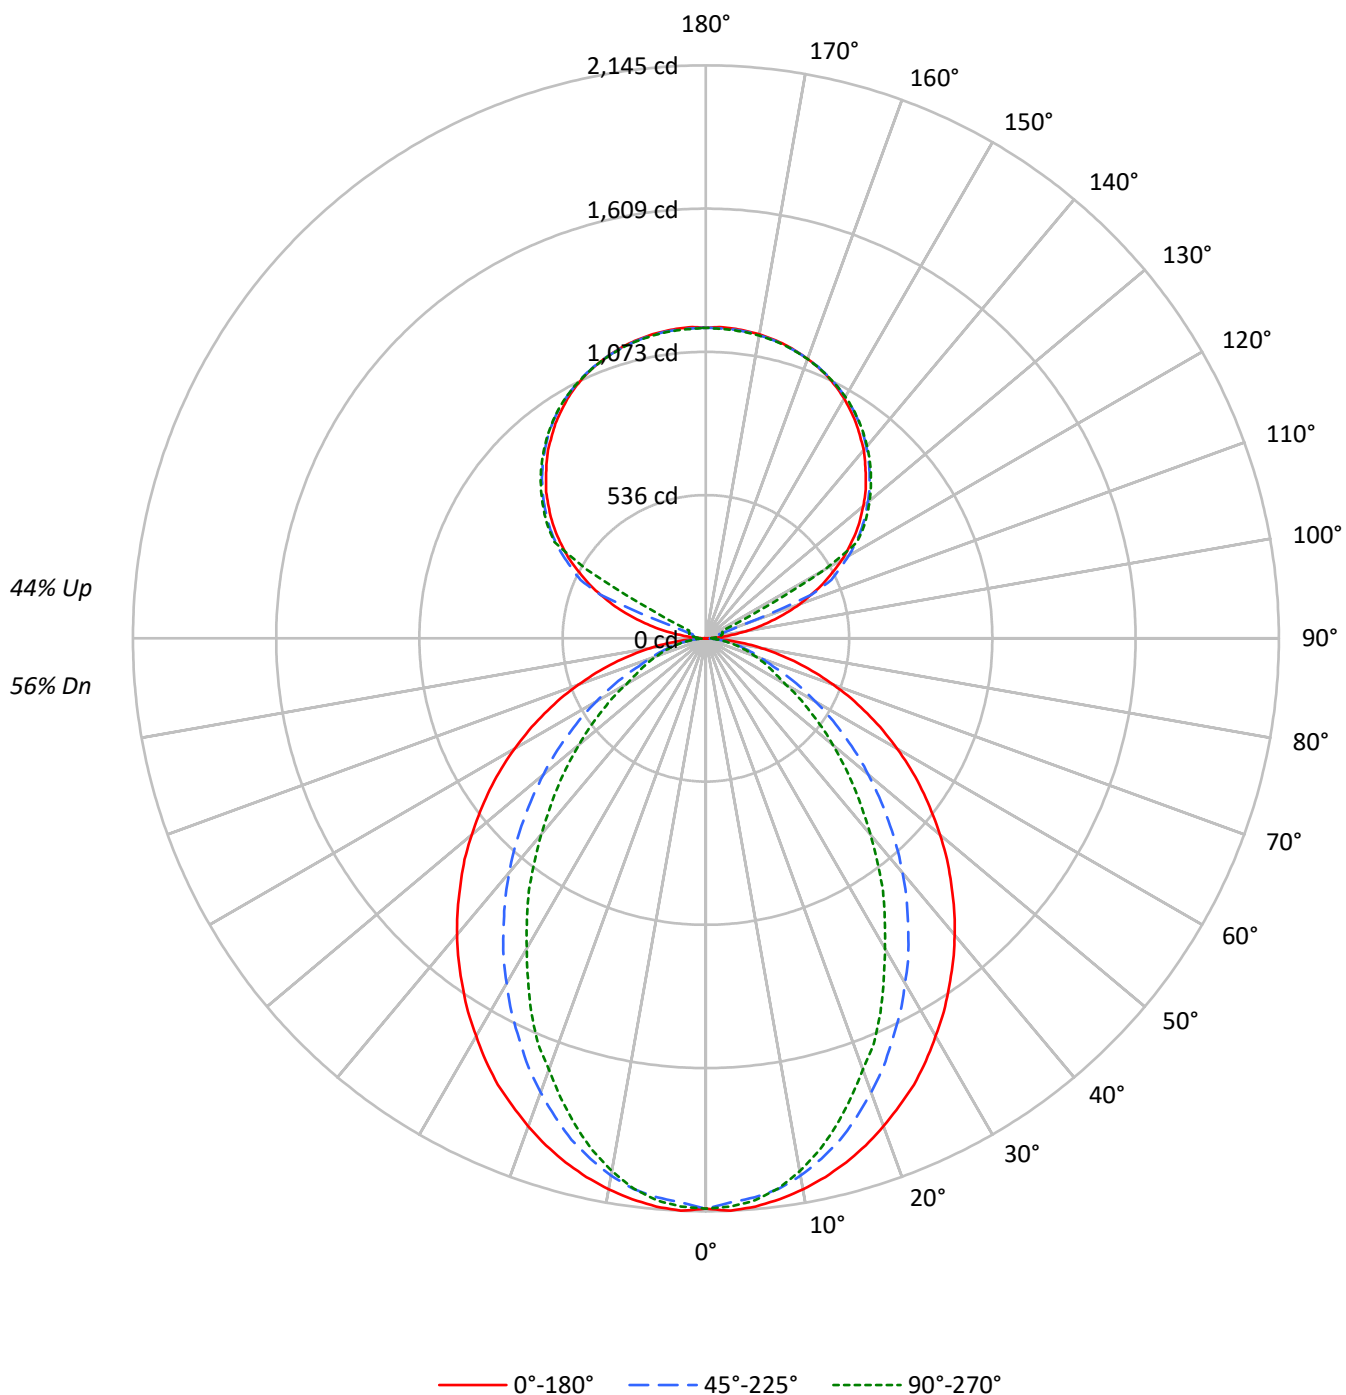

TEST NUMBER: P919307

CATALOG NUMBER: DFN2DIP-PN2F0-060D040US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62
1	100	96	92	88	93	89	86	83	77	75	72	66	64	63	56	54	53
2	91	84	78	73	85	79	73	69	68	64	61	58	56	53	50	48	46
3	84	74	67	62	78	70	63	58	61	56	52	52	49	46	44	42	40
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35
5	71	59	51	46	66	56	49	43	49	43	39	42	38	35	36	33	31
6	65	54	46	40	61	50	43	38	44	39	34	39	34	31	33	30	27
7	61	49	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24
8	56	44	37	31	52	42	35	30	37	31	27	32	28	25	28	25	22
9	53	41	33	28	49	38	32	27	34	28	25	30	25	22	26	23	20
10	49	37	30	25	46	35	29	24	31	26	22	28	23	20	24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4624	4624	4624
5°	4624	4541	4573
10°	4571	4442	4418
15°	4501	4286	4181
20°	4410	4074	3894
25°	4317	3839	3616
30°	4195	3599	3267
35°	4075	3341	2960
40°	3952	3076	2609
45°	3811	2783	2291
50°	3663	2488	1981
55°	3509	2174	1685
60°	3330	1848	1380
65°	3124	1517	1235
70°	2873	1208	1108
75°	2557	1045	994
80°	2104	849	842
85°	1375	529	598

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3811 cd/sqm

TEST NUMBER: P919307

CATALOG NUMBER: DFN2DIP-PN2F0-060D040US935-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	200.1	2.6
10°-20°	549.3	7.0
20°-30°	771.2	9.9
30°-40°	840.7	10.8
40°-50°	772.7	9.9
50°-60°	606.8	7.8
60°-70°	395.0	5.1
70°-80°	203.3	2.6
80°-90°	53.9	0.7
90°-100°	38.3	0.5
100°-110°	142.9	1.8
110°-120°	378.9	4.9
120°-130°	628.5	8.1
130°-140°	667.6	8.6
140°-150°	620.4	8.0
150°-160°	498.8	6.4
160°-170°	321.4	4.1
170°-180°	110.6	1.4
0°-30°	1520.7	19.5
0°-40°	2361.4	30.3
0°-60°	3740.9	48.0
0°-90°	4393.1	56.3
90°-120°	560.1	7.2
90°-150°	2476.6	31.7
90°-180°	3407.0	43.7
0°-180°	7800.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2135	2135	2135	2135	2135	
5°	2135	2126	2100	2118	2112	202
15°	2031	2009	1944	1907	1888	572
25°	1843	1782	1654	1575	1546	848
35°	1588	1490	1320	1198	1155	994
45°	1298	1169	966	829	782	1003
55°	987	837	628	512	475	882
65°	667	510	336	271	265	661
75°	356	220	154	141	139	376
85°	83	42	37	37	37	95
90°	1	10	17	21	23	7
95°	55	27	33	37	36	65
105°	256	281	51	60	64	273
115°	484	498	519	130	69	476
125°	684	695	711	717	719	610
135°	846	860	867	876	874	654
145°	982	981	995	1001	997	614
155°	1081	1073	1083	1088	1082	498
165°	1139	1134	1136	1142	1136	322
175°	1165	1159	1161	1166	1158	111
180°	1162	1162	1162	1162	1162	

TEST NUMBER: P919307

CATALOG NUMBER: DFN2DIP-PN2F0-060D040US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2135.1	2135.1	2135.1	2135.1	2135.1
2.5°	2144.7	2135.1	2113.7	2133.2	2129.3
5°	2135.1	2125.5	2100.2	2117.7	2111.9
7.5°	2117.7	2106.2	2079.1	2086.7	2077.1
10°	2094.5	2080.9	2042.5	2036.5	2025.0
12.5°	2065.6	2048.1	1995.9	1984.4	1963.1
15°	2030.7	2009.4	1943.8	1907.1	1887.8
17.5°	1990.2	1959.2	1878.0	1835.6	1804.7
20°	1943.8	1905.0	1808.5	1760.3	1717.7
22.5°	1893.6	1849.1	1737.0	1671.4	1642.4
25°	1843.4	1781.5	1654.0	1574.9	1545.7
27.5°	1783.6	1717.7	1576.7	1485.8	1441.4
30°	1719.8	1646.1	1491.6	1393.2	1340.9
32.5°	1657.9	1568.9	1410.7	1294.6	1246.2
35°	1588.4	1489.8	1319.8	1198.0	1155.4
37.5°	1520.7	1414.3	1234.8	1101.3	1053.1
40°	1449.1	1333.3	1145.7	1008.6	958.4
42.5°	1375.8	1252.1	1057.0	913.9	865.7
45°	1298.5	1168.9	966.2	828.8	782.5
47.5°	1225.1	1088.0	879.3	741.9	699.5
50°	1143.9	1006.8	794.2	660.7	620.3
52.5°	1064.5	919.6	713.0	585.5	548.8
55°	987.3	836.6	627.9	512.1	475.4
57.5°	908.2	753.5	552.7	444.4	413.5
60°	827.0	672.4	473.4	375.0	344.0
62.5°	747.9	593.3	405.7	313.1	297.6
65°	666.7	510.1	336.2	270.6	264.7
67.5°	589.4	432.7	270.6	237.6	231.9
70°	508.2	357.5	224.0	204.8	197.0
72.5°	430.9	287.8	187.4	172.0	168.1
75°	355.5	220.2	154.5	141.0	139.2
77.5°	280.3	156.4	121.7	114.0	110.1
80°	210.5	112.1	92.6	85.1	85.1
82.5°	146.8	75.4	63.7	59.8	59.8
85°	83.0	42.4	36.7	36.7	36.7
87.5°	31.0	15.4	15.4	13.5	13.5
90°	0.8	10.1	16.8	21.1	22.6
92.5°	21.1	17.7	20.1	21.9	22.6
95°	54.6	26.9	32.7	37.0	36.2
97.5°	98.4	29.4	42.9	45.5	46.2
100°	148.9	33.7	48.0	54.6	56.3
102.5°	204.3	202.8	49.6	58.8	61.4
105°	255.6	280.9	51.3	60.5	63.9
107.5°	315.4	336.4	53.0	62.3	65.6
110°	372.6	390.2	147.2	63.1	66.4

TEST NUMBER: P919307

CATALOG NUMBER: DFN2DIP-PN2F0-060D040US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	426.5	441.5	427.2	64.7	67.3
115°	483.5	497.8	518.9	129.5	69.1
117.5°	533.2	550.0	564.4	444.0	223.7
120°	588.8	601.3	616.5	626.6	513.1
122.5°	635.8	649.3	666.2	671.1	672.0
125°	683.7	694.7	710.7	716.6	719.1
127.5°	727.5	739.3	751.9	760.3	761.1
130°	768.7	782.2	791.3	800.6	799.9
132.5°	810.7	821.7	830.9	838.5	837.8
135°	846.1	859.6	867.1	875.5	873.9
137.5°	883.0	893.1	901.6	910.0	907.5
140°	919.2	926.0	935.2	942.8	938.6
142.5°	949.6	955.4	966.4	973.0	968.9
145°	981.5	980.7	994.9	1000.8	996.6
147.5°	1009.2	1006.7	1021.0	1025.2	1021.9
150°	1036.1	1030.3	1043.8	1048.8	1044.6
152.5°	1058.9	1052.1	1064.7	1069.8	1063.9
155°	1080.7	1073.2	1083.3	1088.3	1081.6
157.5°	1098.4	1091.7	1099.3	1105.2	1098.4
160°	1113.5	1108.4	1113.5	1118.5	1112.7
162.5°	1127.0	1122.0	1126.2	1132.0	1124.5
165°	1138.8	1133.8	1136.3	1142.1	1136.3
167.5°	1148.1	1142.9	1145.6	1151.4	1143.8
170°	1155.6	1150.6	1152.2	1158.1	1150.6
172.5°	1160.6	1155.6	1157.4	1163.2	1155.6
175°	1164.8	1158.9	1160.6	1166.5	1158.1
177.5°	1166.5	1160.6	1161.5	1167.4	1159.9
180°	1162.3	1162.3	1162.3	1162.3	1162.3

TEST NUMBER: P919307

CATALOG NUMBER: DFN2DIP-PN2F0-060D040US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.92	13.81	13.83	14.73	15.91	8.89	9.77	9.80	10.70	11.88
	3H	14.58	15.37	15.50	16.31	17.51	10.07	10.86	10.99	11.79	12.99
	4H	15.18	15.93	16.12	16.86	18.08	10.51	11.25	11.44	12.19	13.40
	6H	15.59	16.28	16.53	17.22	18.45	10.82	11.50	11.76	12.45	13.67
	8H	15.71	16.36	16.66	17.32	18.55	10.90	11.55	11.85	12.51	13.74
	12H	15.76	16.38	16.72	17.34	18.59	10.94	11.56	11.89	12.51	13.76
4H	2H	12.94	13.69	13.88	14.63	15.84	9.48	10.23	10.42	11.16	12.38
	3H	14.75	15.37	15.70	16.34	17.57	10.82	11.44	11.77	12.40	13.63
	4H	15.43	16.00	16.39	16.96	18.21	11.35	11.92	12.31	12.88	14.13
	6H	15.93	16.42	16.90	17.40	18.66	11.76	12.24	12.73	13.23	14.48
	8H	16.09	16.55	17.07	17.53	18.79	11.88	12.33	12.85	13.31	14.58
	12H	16.18	16.59	17.17	17.59	18.86	11.93	12.34	12.93	13.34	14.61
8H	4H	15.40	15.85	16.37	16.83	18.10	11.62	12.08	12.60	13.06	14.32
	6H	15.94	16.32	16.94	17.34	18.61	12.12	12.50	13.12	13.52	14.78
	8H	16.15	16.48	17.16	17.49	18.77	12.30	12.63	13.31	13.64	14.92
	12H	16.27	16.57	17.28	17.57	18.90	12.41	12.70	13.42	13.70	15.03
12H	4H	15.35	15.76	16.34	16.76	18.03	11.63	12.04	12.62	13.03	14.30
	6H	15.92	16.25	16.93	17.26	18.54	12.16	12.50	13.17	13.50	14.79
	8H	16.13	16.42	17.14	17.42	18.75	12.36	12.65	13.37	13.66	14.99