

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P921982

Luminaire Tested: DFN2DIP-PN2F0-030D060US940-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P921982
REPORT IS A COMBINATION OF REPORTS P899504 AND P896349
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-030D060US940-RLLFLL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7008.8 lumens
Efficiency: N/A
Efficacy: 87.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 80.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P921982

CATALOG NUMBER: DFN2DIP-PN2F0-030D060US940-RLLFLL

Luminous Intensity Polar Plot

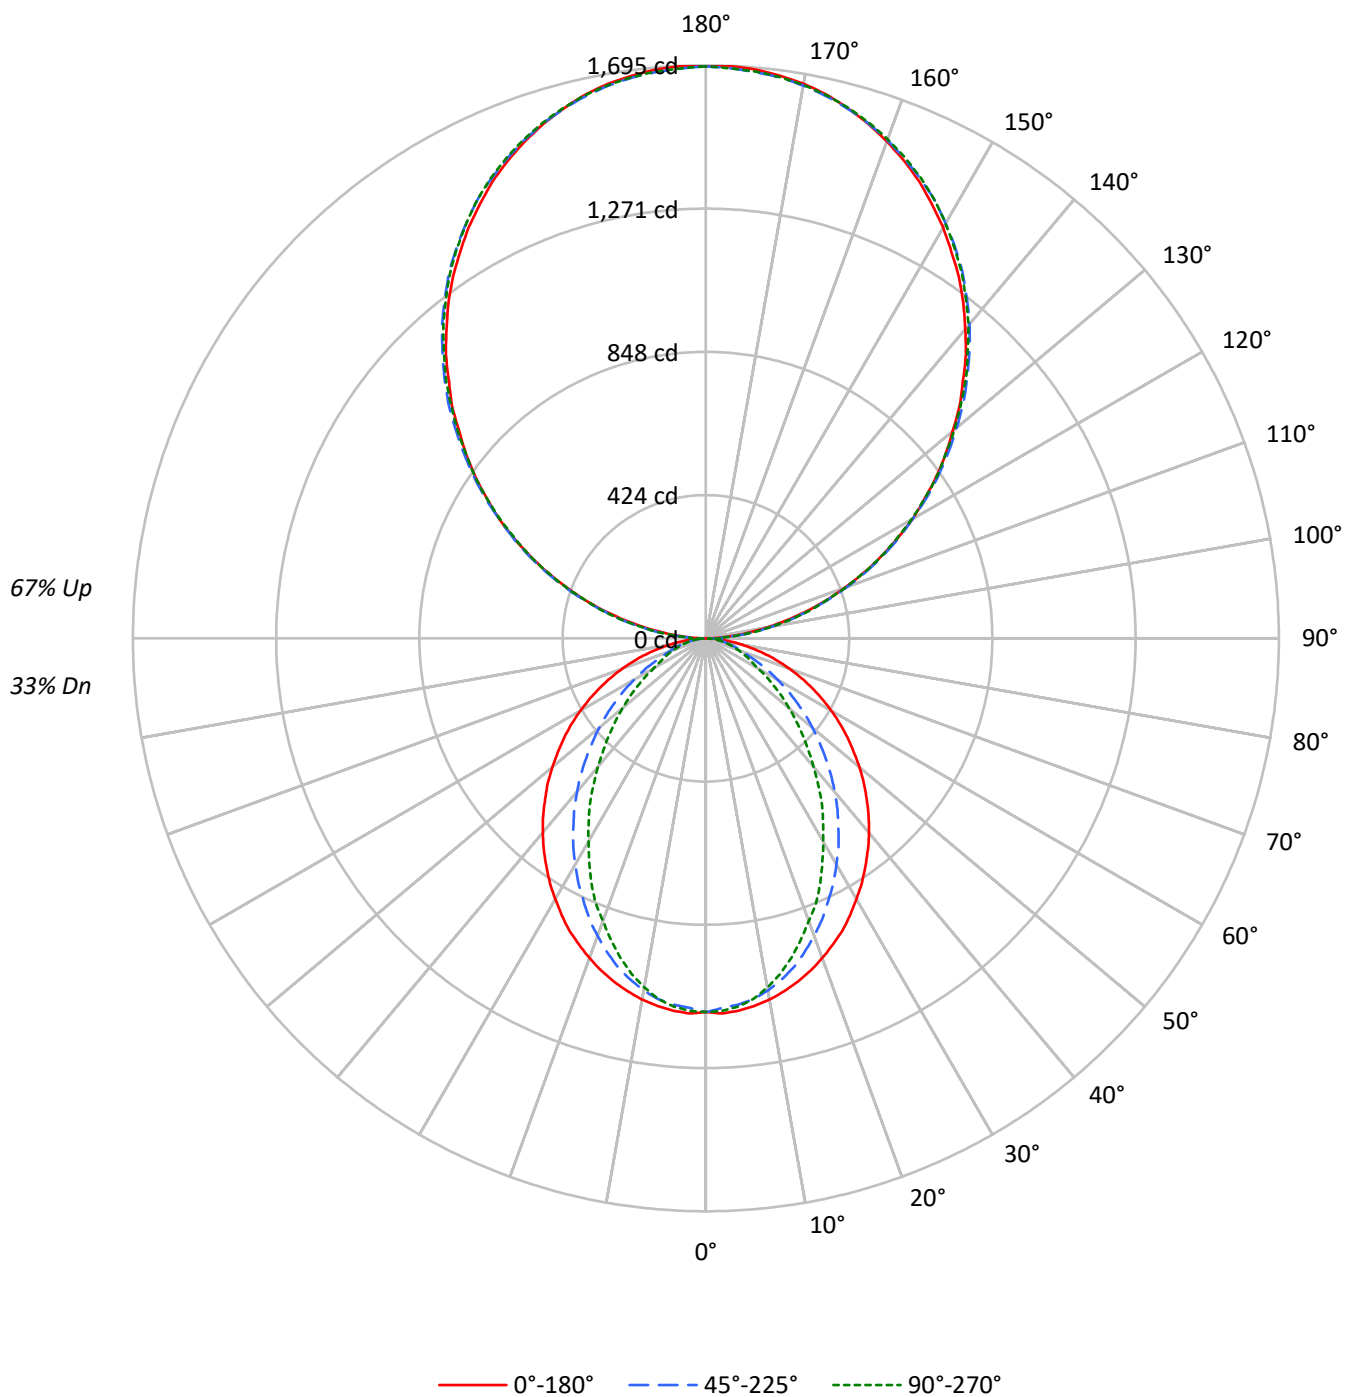

TEST NUMBER: P921982

CATALOG NUMBER: DFN2DIP-PN2F0-030D060US940-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	79	73	68	77	71	67	62	57	54	51	44	42	40	32	31	29
3	79	70	63	57	71	63	57	52	51	46	43	39	36	34	29	27	25
4	72	62	54	49	65	56	50	45	45	41	37	35	32	29	26	24	22
5	66	55	47	42	59	50	43	38	40	36	32	32	28	26	23	21	19
6	61	49	42	36	55	45	38	33	36	32	28	29	25	23	21	19	17
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	19	17	15
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13
10	45	34	27	22	41	31	25	21	25	21	18	20	17	15	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2395	2395	2395
5°	2395	2352	2368
10°	2367	2300	2288
15°	2331	2219	2165
20°	2284	2110	2016
25°	2236	1988	1873
30°	2172	1863	1692
35°	2110	1730	1533
40°	2047	1593	1351
45°	1973	1441	1187
50°	1897	1288	1026
55°	1817	1126	872
60°	1724	957	715
65°	1617	785	640
70°	1487	626	573
75°	1324	542	515
80°	1090	440	436
85°	712	274	309

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2279 cd/sqm

TEST NUMBER: P921982

CATALOG NUMBER: DFN2DIP-PN2F0-030D060US940-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	103.6	1.5
10°-20°	284.5	4.1
20°-30°	399.4	5.7
30°-40°	435.3	6.2
40°-50°	400.1	5.7
50°-60°	314.2	4.5
60°-70°	204.5	2.9
70°-80°	105.3	1.5
80°-90°	31.7	0.5
90°-100°	104.7	1.5
100°-110°	332.7	4.7
110°-120°	569.3	8.1
120°-130°	748.8	10.7
130°-140°	840.5	12.0
140°-150°	824.2	11.8
150°-160°	691.4	9.9
160°-170°	458.5	6.5
170°-180°	160.3	2.3
0°-30°	787.5	11.2
0°-40°	1222.8	17.4
0°-60°	1937.2	27.6
0°-90°	2278.7	32.5
90°-120°	1006.7	14.4
90°-150°	3420.1	48.8
90°-180°	4730.0	67.5
0°-180°	7008.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1106	1106	1106	1106	1106	
5°	1106	1101	1088	1097	1094	105
15°	1052	1040	1007	988	978	296
25°	955	922	856	816	800	439
35°	822	771	683	620	598	515
45°	672	605	500	429	405	519
55°	511	433	325	265	246	457
65°	345	264	174	140	137	342
75°	184	114	80	73	72	195
85°	43	22	19	19	19	49
90°	2	18	50	47	48	7
95°	74	89	91	91	89	83
105°	307	311	314	317	317	324
115°	571	580	577	575	571	565
125°	831	844	840	835	834	743
135°	1075	1091	1094	1092	1088	831
145°	1305	1315	1323	1325	1319	815
155°	1492	1496	1501	1508	1503	687
165°	1623	1622	1622	1632	1625	458
175°	1689	1685	1682	1692	1683	160
180°	1692	1692	1692	1692	1692	

TEST NUMBER: P921982

CATALOG NUMBER: DFN2DIP-PN2F0-030D060US940-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1105.6	1105.6	1105.6	1105.6	1105.6
2.5°	1110.6	1105.6	1094.6	1104.7	1102.7
5°	1105.6	1100.6	1087.6	1096.6	1093.6
7.5°	1096.6	1090.7	1076.7	1080.6	1075.6
10°	1084.6	1077.6	1057.7	1054.5	1048.7
12.5°	1069.6	1060.6	1033.6	1027.6	1016.5
15°	1051.6	1040.5	1006.6	987.6	977.6
17.5°	1030.5	1014.6	972.5	950.6	934.5
20°	1006.6	986.5	936.5	911.6	889.5
22.5°	980.6	957.5	899.5	865.5	850.5
25°	954.6	922.5	856.5	815.5	800.4
27.5°	923.5	889.5	816.5	769.5	746.4
30°	890.6	852.5	772.4	721.5	694.4
32.5°	858.4	812.4	730.5	670.4	645.3
35°	822.5	771.4	683.4	620.4	598.3
37.5°	787.5	732.4	639.4	570.2	545.4
40°	750.5	690.5	593.3	522.3	496.3
42.5°	712.4	648.5	547.3	473.2	448.3
45°	672.4	605.3	500.3	429.2	405.2
47.5°	634.4	563.4	455.3	384.1	362.2
50°	592.4	521.3	411.3	342.1	321.2
52.5°	551.3	476.3	369.3	303.2	284.2
55°	511.2	433.2	325.1	265.2	246.2
57.5°	470.3	390.2	286.2	230.2	214.1
60°	428.2	348.2	245.1	194.1	178.2
62.5°	387.3	307.2	210.1	162.1	154.2
65°	345.2	264.1	174.1	140.1	137.1
67.5°	305.2	224.1	140.1	123.1	120.0
70°	263.1	185.1	116.0	106.0	102.0
72.5°	223.1	149.0	97.0	89.1	87.0
75°	184.0	114.0	80.1	73.0	72.1
77.5°	145.1	81.0	63.0	59.0	57.0
80°	109.1	58.1	48.0	44.1	44.1
82.5°	76.0	39.1	33.0	31.0	31.0
85°	43.0	21.9	19.0	19.0	19.0
87.5°	16.1	7.9	7.9	7.0	7.0
90°	1.5	18.4	50.0	46.9	48.4
92.5°	31.7	42.9	44.4	45.9	45.9
95°	74.5	88.7	91.3	91.3	88.7
97.5°	123.9	137.2	142.9	142.9	142.9
100°	181.1	192.8	196.9	196.9	195.4
102.5°	241.3	249.9	255.6	257.1	255.6
105°	307.1	311.2	314.2	316.8	316.8
107.5°	372.4	378.5	378.5	379.5	372.4
110°	435.7	443.8	443.8	443.8	439.7

TEST NUMBER: P921982

CATALOG NUMBER: DFN2DIP-PN2F0-030D060US940-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	504.0	512.6	511.1	507.0	504.0
115°	571.3	579.5	576.9	575.4	571.3
117.5°	638.2	649.4	642.2	638.2	634.1
120°	705.5	716.8	705.5	705.5	700.9
122.5°	766.7	781.0	773.8	769.8	766.7
125°	831.0	843.7	839.6	835.1	833.6
127.5°	893.8	909.5	903.9	897.9	893.8
130°	952.4	970.8	968.2	965.2	959.6
132.5°	1018.2	1032.5	1033.5	1026.4	1022.3
135°	1074.9	1090.7	1093.7	1092.2	1088.1
137.5°	1138.1	1150.8	1153.4	1152.4	1146.3
140°	1193.7	1206.5	1213.6	1213.6	1208.0
142.5°	1250.8	1263.6	1267.7	1269.2	1263.6
145°	1304.9	1315.1	1323.3	1324.8	1319.2
147.5°	1353.3	1366.1	1372.3	1374.7	1369.1
150°	1403.4	1412.0	1417.6	1422.2	1417.6
152.5°	1447.7	1456.4	1463.6	1469.2	1463.6
155°	1492.1	1496.2	1500.7	1508.0	1503.3
157.5°	1530.4	1533.5	1536.0	1546.2	1539.1
160°	1564.6	1567.6	1569.1	1577.8	1571.7
162.5°	1596.2	1596.2	1597.7	1607.4	1600.3
165°	1623.2	1621.7	1621.7	1631.9	1624.8
167.5°	1647.7	1643.2	1643.2	1653.3	1646.2
170°	1666.1	1662.0	1660.5	1670.6	1662.0
172.5°	1678.8	1674.7	1673.2	1683.4	1674.7
175°	1689.0	1685.0	1681.9	1692.1	1683.4
177.5°	1694.6	1690.6	1687.5	1696.1	1687.5
180°	1692.1	1692.1	1692.1	1692.1	1692.1

TEST NUMBER: P921982

CATALOG NUMBER: DFN2DIP-PN2F0-030D060US940-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.16	8.87	9.26	9.96	11.46	4.13	4.84	5.23	5.93	7.43
	3H	9.81	10.44	10.92	11.54	13.06	5.29	5.92	6.40	7.03	8.55
	4H	10.40	11.00	11.52	12.10	13.63	5.73	6.32	6.84	7.43	8.95
	6H	10.80	11.35	11.92	12.45	13.99	6.03	6.58	7.15	7.68	9.22
	8H	10.91	11.43	12.04	12.56	14.09	6.10	6.63	7.23	7.75	9.28
	12H	10.96	11.46	12.09	12.57	14.13	6.14	6.63	7.27	7.75	9.30
4H	2H	8.16	8.76	9.29	9.86	11.39	4.70	5.30	5.83	6.40	7.93
	3H	9.96	10.45	11.09	11.58	13.12	6.02	6.52	7.15	7.65	9.18
	4H	10.63	11.08	11.76	12.20	13.76	6.55	7.00	7.68	8.12	9.68
	6H	11.12	11.51	12.26	12.65	14.20	6.94	7.33	8.08	8.47	10.02
	8H	11.28	11.64	12.42	12.77	14.34	7.06	7.42	8.20	8.56	10.12
	12H	11.35	11.69	12.51	12.83	14.40	7.11	7.44	8.26	8.58	10.15
8H	4H	10.58	10.95	11.72	12.08	13.64	6.81	7.17	7.95	8.30	9.87
	6H	11.12	11.42	12.28	12.60	14.16	7.30	7.60	8.46	8.77	10.34
	8H	11.32	11.59	12.49	12.74	14.32	7.47	7.74	8.64	8.89	10.47
	12H	11.44	11.67	12.61	12.82	14.44	7.57	7.81	8.74	8.96	10.57
12H	4H	10.53	10.86	11.68	12.00	13.57	6.80	7.13	7.96	8.28	9.85
	6H	11.09	11.36	12.26	12.51	14.09	7.34	7.60	8.51	8.76	10.34
	8H	11.29	11.53	12.46	12.68	14.29	7.53	7.76	8.70	8.91	10.53