

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924707

Luminaire Tested: DFN2DIP-PN2F0-030D050US950-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924707
REPORT IS A COMBINATION OF REPORTS P901014 AND P897905
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-030D050US950-RLLONL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7155.0 lumens
Efficiency: N/A
Efficacy: 103.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 69
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924707

CATALOG NUMBER: DFN2DIP-PN2F0-030D050US950-RLLONL

Luminous Intensity Polar Plot

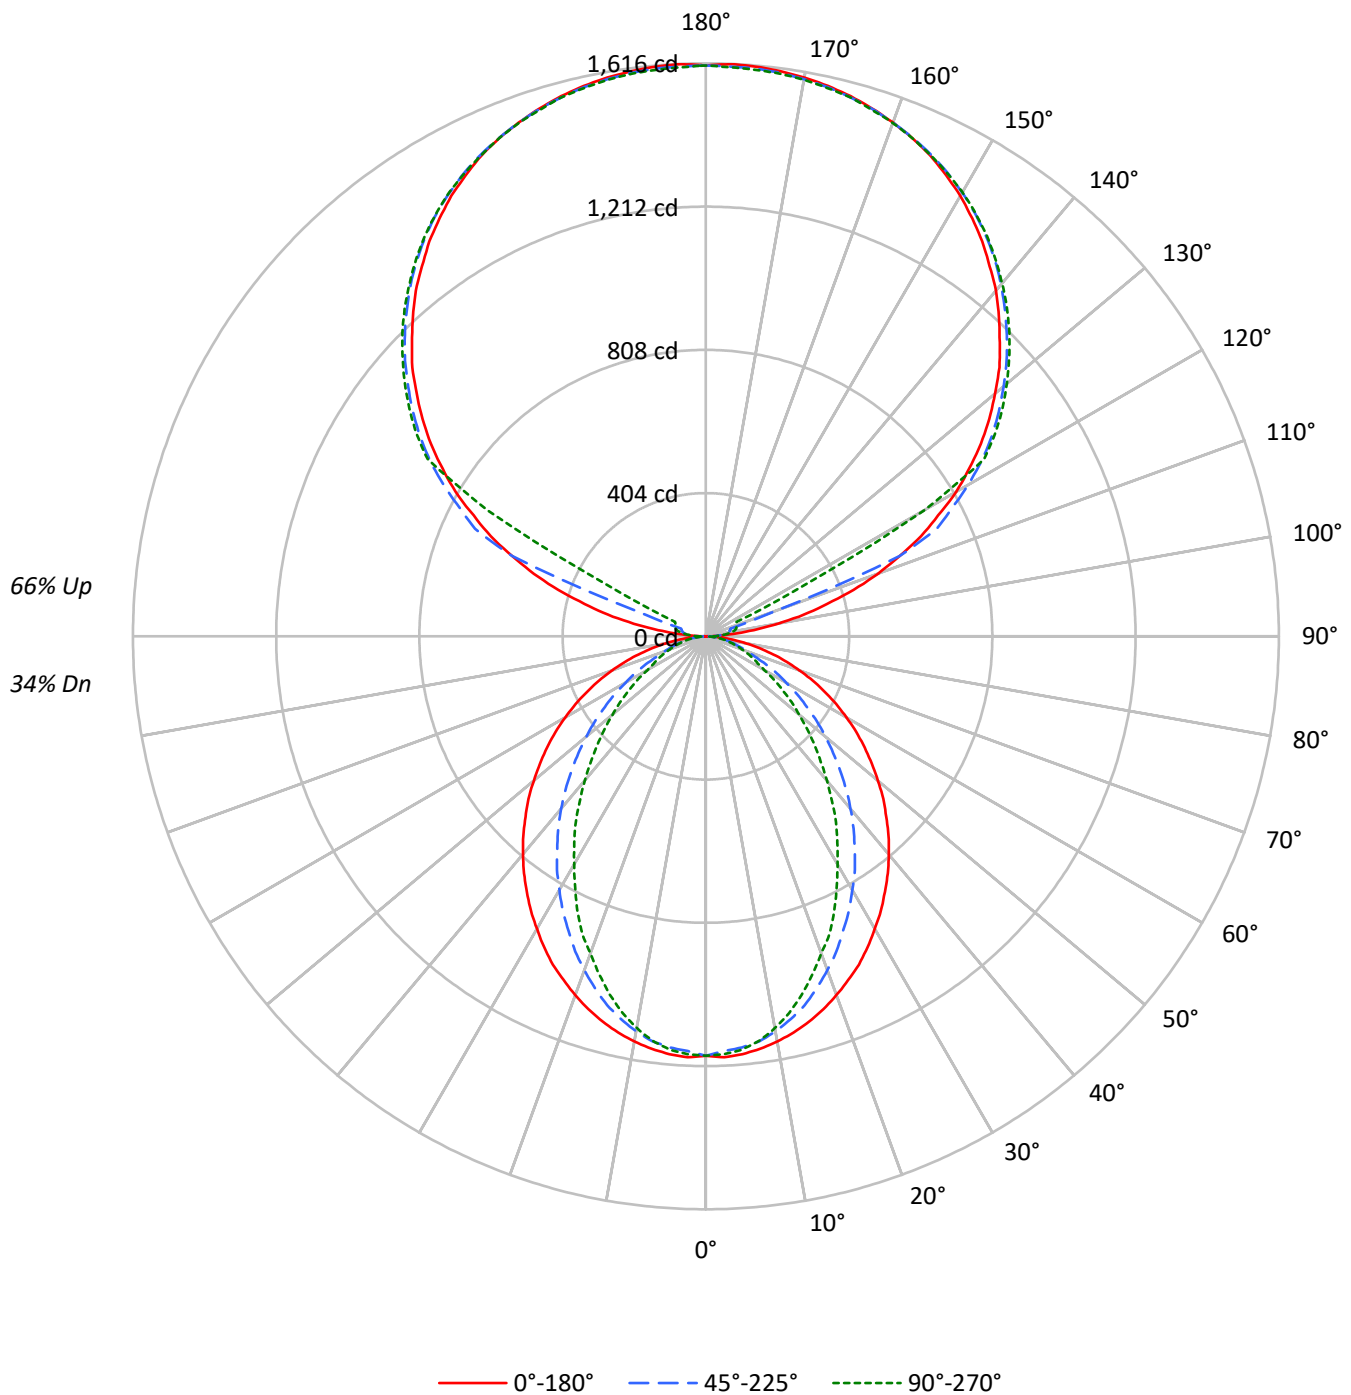

TEST NUMBER: P924707

CATALOG NUMBER: DFN2DIP-PN2F0-030D050US950-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41
1	95	90	87	83	85	82	79	76	66	64	62	51	49	48	37	36	36
2	86	79	74	69	78	72	67	63	58	54	52	45	43	41	33	32	30
3	79	70	63	58	71	63	58	53	51	47	44	40	37	35	30	28	26
4	72	62	55	49	65	56	50	45	46	41	37	36	33	30	27	25	23
5	66	55	48	42	60	50	44	39	41	36	32	32	29	26	24	22	20
6	61	50	42	36	55	45	39	34	37	32	28	29	26	23	22	20	18
7	57	45	37	32	51	41	34	30	34	29	25	27	23	20	20	18	16
8	52	41	33	28	47	37	31	26	31	26	22	24	21	18	19	16	14
9	49	37	30	25	44	34	28	23	28	23	20	22	19	16	17	15	13
10	46	34	27	22	41	31	25	21	26	21	18	21	17	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2562	2562	2562
5°	2562	2516	2534
10°	2533	2461	2448
15°	2494	2374	2317
20°	2443	2257	2157
25°	2392	2127	2003
30°	2324	1994	1810
35°	2258	1851	1640
40°	2190	1704	1446
45°	2111	1542	1269
50°	2029	1378	1098
55°	1944	1204	933
60°	1845	1024	765
65°	1730	840	684
70°	1591	669	613
75°	1416	580	551
80°	1166	471	466
85°	762	292	331

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2111 cd/sqm

TEST NUMBER: P924707

CATALOG NUMBER: DFN2DIP-PN2F0-030D050US950-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	110.9	1.5
10°-20°	304.3	4.3
20°-30°	427.3	6.0
30°-40°	465.7	6.5
40°-50°	428.1	6.0
50°-60°	336.2	4.7
60°-70°	218.8	3.1
70°-80°	112.6	1.6
80°-90°	31.6	0.4
90°-100°	53.1	0.7
100°-110°	197.9	2.8
110°-120°	524.8	7.3
120°-130°	870.4	12.2
130°-140°	924.6	12.9
140°-150°	859.3	12.0
150°-160°	690.9	9.7
160°-170°	445.2	6.2
170°-180°	153.2	2.1
0°-30°	842.5	11.8
0°-40°	1308.2	18.3
0°-60°	2072.5	29.0
0°-90°	2435.5	34.0
90°-120°	775.8	10.8
90°-150°	3430.2	47.9
90°-180°	4719.0	66.0
0°-180°	7155.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1183	1183	1183	1183	1183	
5°	1183	1178	1164	1173	1170	112
15°	1125	1113	1077	1057	1046	317
25°	1021	987	916	872	856	470
35°	880	825	731	664	640	551
45°	719	648	535	459	434	556
55°	547	464	348	284	263	489
65°	369	283	186	150	147	366
75°	197	122	86	78	77	208
85°	46	24	20	20	20	53
90°	1	14	23	29	31	7
95°	76	37	45	51	50	90
105°	354	389	71	84	88	378
115°	670	690	719	179	96	659
125°	947	962	984	992	996	845
135°	1172	1191	1201	1213	1210	905
145°	1359	1358	1378	1386	1380	850
155°	1497	1486	1500	1507	1498	690
165°	1577	1570	1574	1582	1574	446
175°	1613	1605	1608	1616	1604	154
180°	1610	1610	1610	1610	1610	

TEST NUMBER: P924707

CATALOG NUMBER: DFN2DIP-PN2F0-030D050US950-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1182.9	1182.9	1182.9	1182.9	1182.9
2.5°	1188.2	1182.9	1171.0	1181.8	1179.7
5°	1182.9	1177.5	1163.6	1173.2	1170.0
7.5°	1173.2	1166.8	1151.9	1156.1	1150.7
10°	1160.4	1152.9	1131.5	1128.2	1121.9
12.5°	1144.3	1134.7	1105.8	1099.4	1087.6
15°	1125.1	1113.2	1076.9	1056.6	1045.9
17.5°	1102.5	1085.5	1040.4	1017.0	999.8
20°	1076.9	1055.4	1001.9	975.3	951.6
22.5°	1049.1	1024.4	962.3	926.0	909.9
25°	1021.3	986.9	916.3	872.4	856.3
27.5°	988.1	951.6	873.5	823.2	798.5
30°	952.8	912.0	826.4	771.9	742.9
32.5°	918.4	869.2	781.5	717.2	690.4
35°	880.0	825.3	731.1	663.7	640.1
37.5°	842.5	783.5	684.0	610.1	583.5
40°	802.9	738.7	634.8	558.8	531.0
42.5°	762.2	693.7	585.6	506.3	479.6
45°	719.4	647.6	535.3	459.2	433.5
47.5°	678.7	602.7	487.1	411.0	387.5
50°	633.7	557.7	440.0	366.0	343.6
52.5°	589.8	509.5	395.1	324.4	304.0
55°	546.9	463.5	347.8	283.7	263.4
57.5°	503.1	417.5	306.2	246.2	229.1
60°	458.1	372.5	262.3	207.7	190.6
62.5°	414.3	328.7	224.8	173.4	164.9
65°	369.3	282.6	186.2	149.9	146.6
67.5°	326.6	239.7	149.9	131.7	128.4
70°	281.5	198.1	124.1	113.4	109.1
72.5°	238.7	159.4	103.8	95.3	93.1
75°	196.9	122.0	85.7	78.1	77.1
77.5°	155.2	86.6	67.4	63.2	61.0
80°	116.7	62.1	51.3	47.1	47.1
82.5°	81.3	41.8	35.3	33.2	33.2
85°	46.0	23.5	20.3	20.3	20.3
87.5°	17.2	8.5	8.5	7.5	7.5
90°	1.1	13.9	23.3	29.2	31.4
92.5°	29.2	24.5	28.0	30.3	31.4
95°	75.7	37.2	45.4	51.3	50.1
97.5°	136.2	40.8	59.3	63.0	64.0
100°	206.3	46.7	66.4	75.7	78.0
102.5°	283.1	280.8	68.8	81.5	85.1
105°	354.1	389.1	71.1	83.9	88.5
107.5°	436.8	465.8	73.5	86.1	90.9
110°	516.1	540.4	203.9	87.4	92.0

TEST NUMBER: P924707

CATALOG NUMBER: DFN2DIP-PN2F0-030D050US950-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	590.6	611.5	591.8	89.7	93.2
115°	669.8	689.6	718.7	179.4	95.6
117.5°	738.5	761.8	781.7	614.9	309.9
120°	815.4	832.8	853.8	867.9	710.5
122.5°	880.5	899.2	922.6	929.6	930.8
125°	946.9	962.2	984.3	992.4	996.0
127.5°	1007.5	1023.8	1041.5	1053.0	1054.2
130°	1064.7	1083.4	1096.1	1108.9	1107.9
132.5°	1123.0	1138.1	1150.8	1161.4	1160.3
135°	1171.9	1190.6	1200.9	1212.7	1210.3
137.5°	1223.0	1237.1	1248.8	1260.4	1257.0
140°	1273.1	1282.6	1295.2	1305.7	1300.0
142.5°	1315.2	1323.4	1338.5	1347.7	1341.9
145°	1359.4	1358.2	1378.0	1386.2	1380.3
147.5°	1397.8	1394.3	1414.1	1419.9	1415.4
150°	1435.1	1427.0	1445.6	1452.6	1446.7
152.5°	1466.5	1457.2	1474.7	1481.8	1473.5
155°	1496.8	1486.4	1500.4	1507.3	1498.1
157.5°	1521.2	1512.0	1522.5	1530.7	1521.2
160°	1542.3	1535.3	1542.3	1549.2	1541.1
162.5°	1560.8	1554.0	1559.7	1567.9	1557.4
165°	1577.2	1570.3	1573.7	1581.8	1573.7
167.5°	1590.0	1583.0	1586.6	1594.7	1584.2
170°	1600.5	1593.5	1595.9	1604.0	1593.5
172.5°	1607.5	1600.5	1602.9	1611.0	1600.5
175°	1613.3	1605.1	1607.5	1615.6	1604.0
177.5°	1615.6	1607.5	1608.7	1616.8	1606.3
180°	1609.8	1609.8	1609.8	1609.8	1609.8

TEST NUMBER: P924707

CATALOG NUMBER: DFN2DIP-PN2F0-030D050US950-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.59	9.31	9.68	10.39	11.88	4.56	5.28	5.65	6.36	7.84
	3H	10.24	10.88	11.34	11.97	13.48	5.72	6.36	6.82	7.46	8.96
	4H	10.83	11.44	11.94	12.53	14.04	6.16	6.76	7.26	7.86	9.36
	6H	11.23	11.79	12.35	12.88	14.40	6.46	7.01	7.57	8.11	9.63
	8H	11.34	11.87	12.46	12.99	14.50	6.54	7.07	7.66	8.18	9.69
	12H	11.39	11.90	12.52	13.00	14.54	6.57	7.07	7.69	8.18	9.71
4H	2H	8.59	9.20	9.71	10.29	11.80	5.13	5.74	6.25	6.83	8.34
	3H	10.39	10.89	11.51	12.01	13.53	6.45	6.95	7.57	8.08	9.60
	4H	11.06	11.52	12.18	12.63	14.17	6.98	7.44	8.10	8.55	10.09
	6H	11.55	11.95	12.68	13.08	14.61	7.37	7.77	8.51	8.90	10.44
	8H	11.71	12.08	12.84	13.21	14.75	7.49	7.86	8.62	8.99	10.53
	12H	11.79	12.12	12.94	13.26	14.81	7.54	7.88	8.69	9.01	10.57
8H	4H	11.02	11.39	12.15	12.51	14.06	7.24	7.61	8.37	8.73	10.28
	6H	11.55	11.86	12.71	13.03	14.57	7.73	8.04	8.88	9.20	10.75
	8H	11.76	12.02	12.91	13.17	14.74	7.91	8.17	9.07	9.32	10.89
	12H	11.88	12.11	13.04	13.25	14.85	8.01	8.24	9.17	9.39	10.99
12H	4H	10.96	11.30	12.11	12.43	13.99	7.24	7.57	8.38	8.71	10.26
	6H	11.53	11.79	12.69	12.94	14.51	7.77	8.04	8.93	9.19	10.75
	8H	11.73	11.96	12.89	13.11	14.71	7.96	8.20	9.13	9.34	10.94