

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924715

Luminaire Tested: DFN2DIP-PN2F0-040D020US950-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924715
REPORT IS A COMBINATION OF REPORTS P900986 AND P897905
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-040D020US950-RLLONL
Description: 2 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5132.5 lumens
Efficiency: N/A
Efficacy: 93.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 55.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924715

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US950-RLLONL

Luminous Intensity Polar Plot

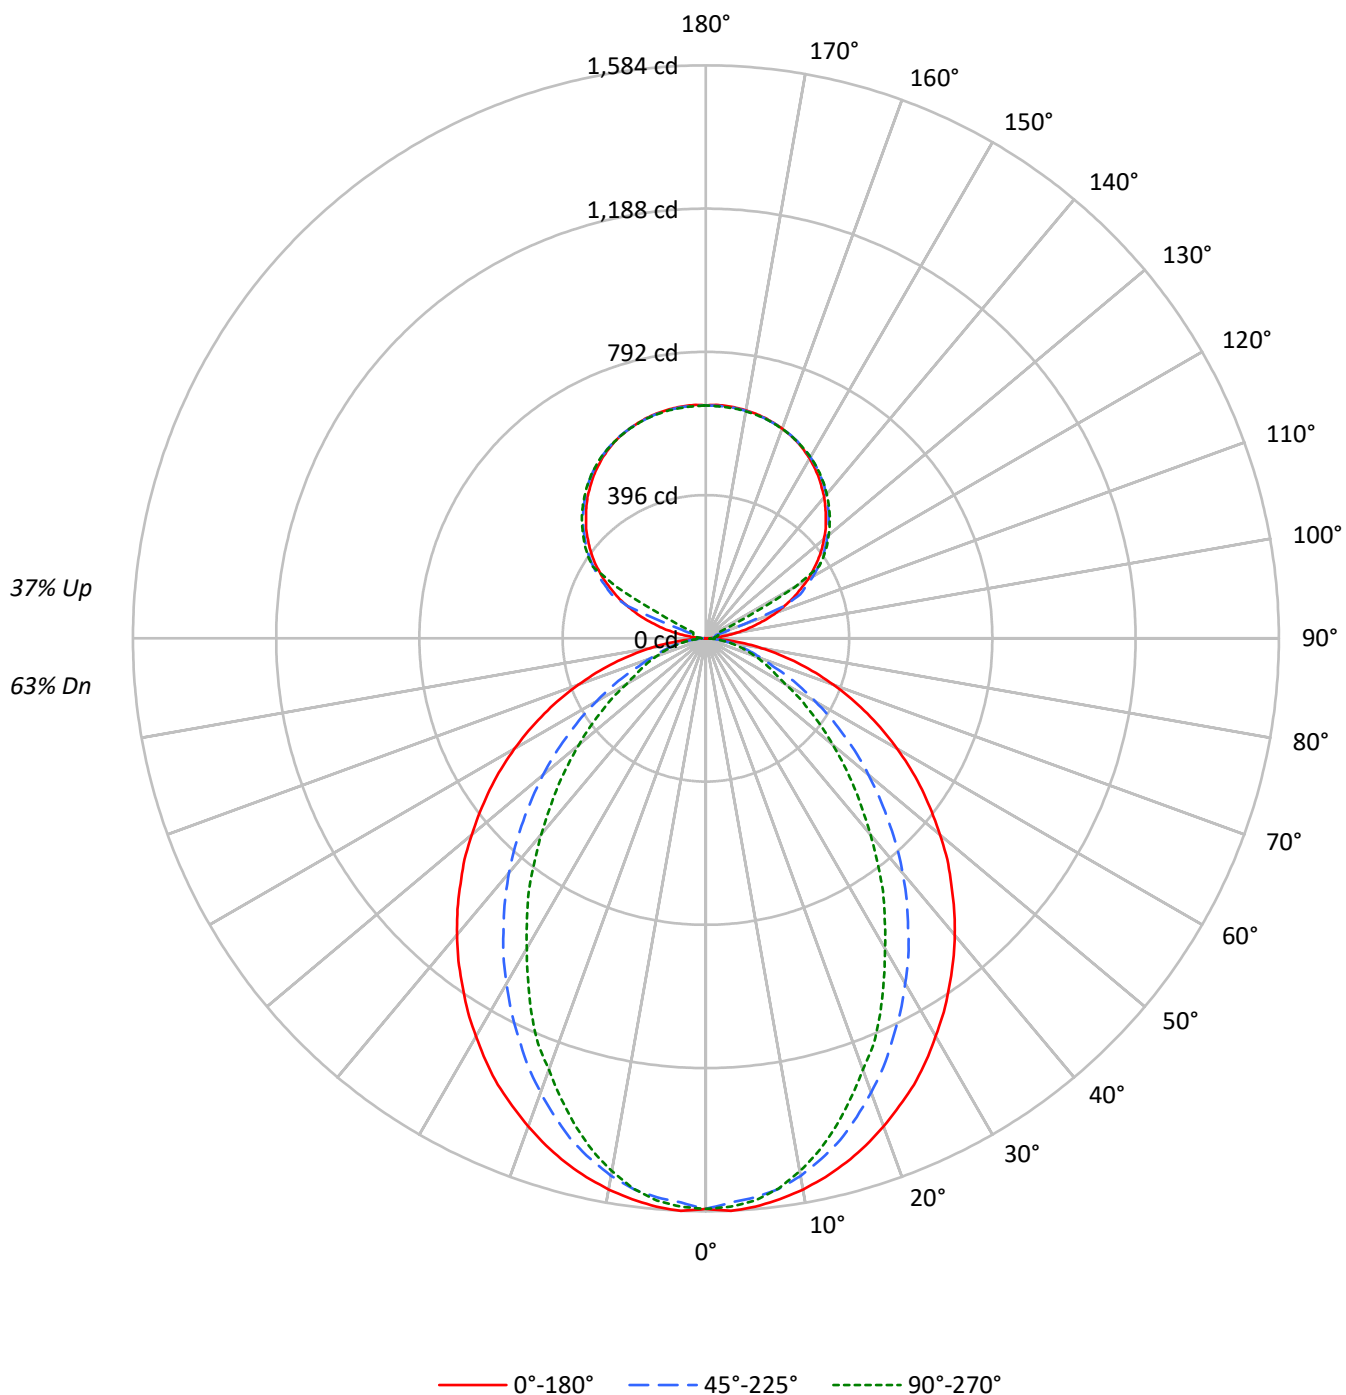

TEST NUMBER: P924715

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US950-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68
1	101	97	93	90	95	91	88	85	80	78	76	71	69	67	61	60	59
2	93	86	80	75	87	81	75	71	71	67	64	63	60	57	55	53	51
3	85	76	69	63	80	72	65	60	63	58	54	56	52	49	49	46	44
4	78	68	60	54	73	64	57	52	57	51	47	50	46	43	44	41	38
5	72	61	53	47	67	57	50	45	51	45	41	46	41	37	40	37	34
6	67	55	47	41	62	52	45	39	46	41	36	41	37	33	37	33	30
7	62	50	42	36	58	47	40	35	42	36	32	38	33	30	34	30	27
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	24
9	54	42	34	29	51	40	33	28	36	30	26	32	27	24	29	25	22
10	50	38	31	26	47	37	30	25	33	28	24	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3416	3416	3416
5°	3416	3354	3378
10°	3377	3281	3263
15°	3325	3166	3089
20°	3258	3010	2876
25°	3189	2836	2671
30°	3099	2658	2413
35°	3010	2468	2186
40°	2920	2272	1927
45°	2815	2056	1693
50°	2706	1838	1464
55°	2592	1606	1244
60°	2459	1364	1019
65°	2308	1120	912
70°	2122	892	818
75°	1888	773	734
80°	1554	627	622
85°	1016	390	441

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2815 cd/sqm

TEST NUMBER: P924715

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US950-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.8	2.9
10°-20°	405.8	7.9
20°-30°	569.7	11.1
30°-40°	621.0	12.1
40°-50°	570.8	11.1
50°-60°	448.2	8.7
60°-70°	291.8	5.7
70°-80°	150.2	2.9
80°-90°	39.5	0.8
90°-100°	21.2	0.4
100°-110°	79.1	1.5
110°-120°	209.9	4.1
120°-130°	348.2	6.8
130°-140°	369.8	7.2
140°-150°	343.7	6.7
150°-160°	276.4	5.4
160°-170°	178.1	3.5
170°-180°	61.3	1.2
0°-30°	1123.3	21.9
0°-40°	1744.3	34.0
0°-60°	2763.3	53.8
0°-90°	3244.7	63.2
90°-120°	310.3	6.0
90°-150°	1372.0	26.7
90°-180°	1888.0	36.8
0°-180°	5132.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1577	1577	1577	1577	1577	
5°	1577	1570	1551	1564	1560	150
15°	1500	1484	1436	1409	1395	423
25°	1362	1316	1222	1163	1142	626
35°	1173	1100	975	885	853	734
45°	959	864	714	612	578	741
55°	729	618	464	378	351	652
65°	492	377	248	200	196	488
75°	262	163	114	104	103	278
85°	61	31	27	27	27	70
90°	0	6	9	12	13	5
95°	30	15	18	20	20	36
105°	142	156	28	34	35	151
115°	268	276	288	72	38	264
125°	379	385	394	397	398	338
135°	469	476	480	485	484	362
145°	544	543	551	554	552	340
155°	599	594	600	603	599	276
165°	631	628	629	633	629	178
175°	645	642	643	646	642	61
180°	644	644	644	644	644	

TEST NUMBER: P924715

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US950-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1577.2	1577.2	1577.2	1577.2	1577.2
2.5°	1584.3	1577.2	1561.4	1575.8	1572.9
5°	1577.2	1570.0	1551.4	1564.3	1560.1
7.5°	1564.3	1555.8	1535.8	1541.4	1534.3
10°	1547.2	1537.2	1508.7	1504.3	1495.9
12.5°	1525.8	1512.9	1474.3	1465.8	1450.1
15°	1500.1	1484.3	1435.9	1408.8	1394.6
17.5°	1470.1	1447.2	1387.2	1355.9	1333.0
20°	1435.9	1407.2	1335.9	1300.3	1268.8
22.5°	1398.8	1365.9	1283.0	1234.6	1213.3
25°	1361.6	1315.9	1221.7	1163.3	1141.7
27.5°	1317.5	1268.8	1164.6	1097.6	1064.7
30°	1270.3	1216.0	1101.8	1029.1	990.5
32.5°	1224.6	1158.9	1042.0	956.3	920.5
35°	1173.3	1100.4	974.9	884.9	853.4
37.5°	1123.3	1044.7	912.0	813.5	777.9
40°	1070.5	984.9	846.4	745.1	708.0
42.5°	1016.2	924.9	780.8	675.1	639.5
45°	959.2	863.5	713.7	612.3	578.0
47.5°	905.0	803.6	649.5	548.1	516.7
50°	845.0	743.6	586.6	488.1	458.2
52.5°	786.4	679.3	526.7	432.4	405.4
55°	729.3	618.0	463.8	378.3	351.2
57.5°	670.9	556.7	408.2	328.3	305.5
60°	610.8	496.7	349.6	276.9	254.1
62.5°	552.5	438.3	299.7	231.2	219.9
65°	492.5	376.7	248.3	199.9	195.5
67.5°	435.4	319.7	199.9	175.5	171.2
70°	375.4	264.1	165.5	151.3	145.5
72.5°	318.3	212.6	138.4	127.1	124.2
75°	262.5	162.7	114.2	104.2	102.8
77.5°	207.0	115.5	90.0	84.2	81.3
80°	155.5	82.8	68.4	62.9	62.9
82.5°	108.5	55.7	47.1	44.2	44.2
85°	61.3	31.4	27.1	27.1	27.1
87.5°	22.9	11.4	11.4	10.0	10.0
90°	0.5	5.6	9.3	11.6	12.6
92.5°	11.6	9.8	11.2	12.1	12.6
95°	30.2	14.9	18.1	20.5	20.0
97.5°	54.5	16.3	23.8	25.2	25.7
100°	82.5	18.6	26.5	30.2	31.2
102.5°	113.2	112.3	27.5	32.6	34.1
105°	141.7	155.6	28.4	33.5	35.4
107.5°	174.8	186.3	29.4	34.4	36.3
110°	206.4	216.2	81.6	35.0	36.8

TEST NUMBER: P924715

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US950-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	236.2	244.6	236.7	35.9	37.3
115°	267.9	275.8	287.5	71.7	38.3
117.5°	295.4	304.7	312.6	246.0	123.9
120°	326.2	333.1	341.5	347.2	284.2
122.5°	352.2	359.7	369.0	371.8	372.3
125°	378.8	384.8	393.7	397.0	398.4
127.5°	403.1	409.6	416.6	421.2	421.7
130°	425.9	433.3	438.5	443.6	443.1
132.5°	449.1	455.2	460.3	464.5	464.1
135°	468.8	476.2	480.3	485.1	484.2
137.5°	489.2	494.8	499.5	504.2	502.8
140°	509.2	513.1	518.1	522.3	520.0
142.5°	526.0	529.4	535.4	539.1	536.7
145°	543.8	543.3	551.2	554.5	552.2
147.5°	559.1	557.7	565.6	567.9	566.1
150°	574.0	570.8	578.2	581.0	578.7
152.5°	586.6	582.9	589.9	592.7	589.4
155°	598.7	594.5	600.2	602.9	599.2
157.5°	608.6	604.8	609.0	612.3	608.6
160°	617.0	614.1	617.0	619.7	616.5
162.5°	624.3	621.5	623.9	627.2	623.0
165°	630.9	628.1	629.4	632.8	629.4
167.5°	636.0	633.2	634.6	637.9	633.6
170°	640.2	637.4	638.3	641.6	637.4
172.5°	643.0	640.2	641.2	644.4	640.2
175°	645.3	642.0	643.0	646.2	641.6
177.5°	646.2	643.0	643.5	646.7	642.5
180°	643.9	643.9	643.9	643.9	643.9

TEST NUMBER: P924715

CATALOG NUMBER: DFN2DIP-PN2F0-040D020US950-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.45	13.40	13.29	14.26	15.33	8.42	9.37	9.26	10.23	11.30
	3H	14.12	14.97	14.97	15.84	16.94	9.60	10.45	10.45	11.32	12.42
	4H	14.72	15.52	15.59	16.40	17.51	10.04	10.85	10.92	11.72	12.83
	6H	15.13	15.87	16.01	16.75	17.87	10.36	11.09	11.24	11.98	13.10
	8H	15.25	15.95	16.14	16.85	17.97	10.44	11.14	11.33	12.04	13.17
	12H	15.31	15.98	16.20	16.87	18.02	10.48	11.15	11.38	12.04	13.19
4H	2H	12.48	13.28	13.36	14.16	15.27	9.02	9.82	9.89	10.70	11.81
	3H	14.30	14.96	15.18	15.87	17.00	10.36	11.03	11.25	11.93	13.06
	4H	14.98	15.58	15.88	16.49	17.64	10.90	11.50	11.80	12.41	13.56
	6H	15.48	16.00	16.39	16.93	18.08	11.31	11.83	12.22	12.76	13.91
	8H	15.65	16.13	16.56	17.06	18.22	11.43	11.91	12.34	12.84	14.00
	12H	15.73	16.17	16.67	17.11	18.29	11.49	11.93	12.42	12.87	14.04
8H	4H	14.95	15.44	15.87	16.36	17.53	11.17	11.66	12.09	12.58	13.75
	6H	15.50	15.90	16.44	16.86	18.03	11.67	12.08	12.62	13.04	14.21
	8H	15.70	16.06	16.65	17.01	18.20	11.85	12.21	12.80	13.16	14.35
	12H	15.83	16.14	16.78	17.09	18.33	11.96	12.28	12.92	13.22	14.46
12H	4H	14.91	15.35	15.84	16.29	17.46	11.18	11.62	12.12	12.56	13.73
	6H	15.47	15.83	16.42	16.78	17.97	11.72	12.08	12.67	13.03	14.21
	8H	15.68	16.00	16.64	16.94	18.18	11.92	12.23	12.87	13.18	14.41