

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P924721

Luminaire Tested: DFN2DIP-PN2F0-040D040US950-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P924721
REPORT IS A COMBINATION OF REPORTS P901005 AND P897905
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN2F0-040D040US950-FLLONL
Description: 2 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7555.7 lumens
Efficiency: N/A
Efficacy: 107.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.17' x L: 2.29' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 70.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P924721

CATALOG NUMBER: DFN2DIP-PN2F0-040D040US950-FLLONL

Luminous Intensity Polar Plot

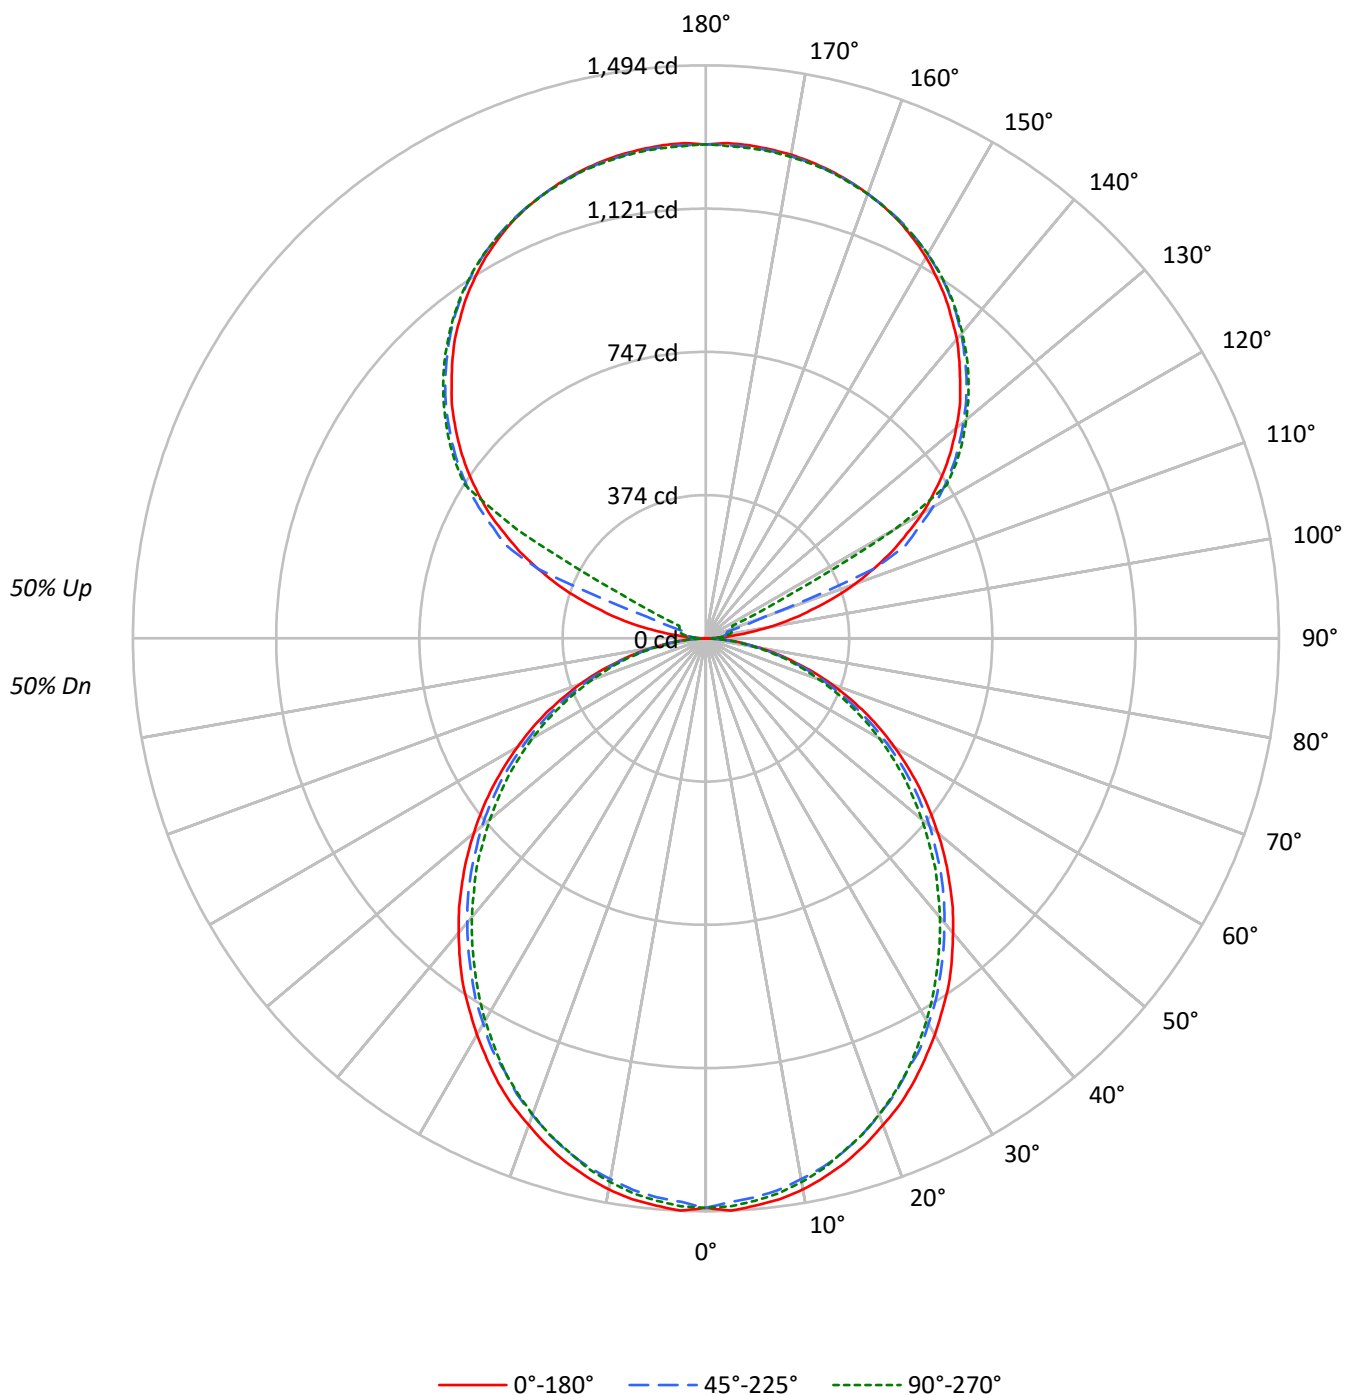

TEST NUMBER: P924721

CATALOG NUMBER: DFN2DIP-PN2F0-040D040US950-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56
1	98	93	90	86	90	86	83	80	73	71	68	61	59	58	50	48	47
2	89	82	75	70	82	76	70	66	64	60	57	53	51	48	44	42	40
3	81	72	64	59	75	66	60	55	56	52	48	47	44	41	39	36	34
4	74	64	56	50	68	59	52	47	50	45	41	42	38	35	35	32	29
5	68	57	48	42	63	53	45	40	45	39	35	38	34	30	31	28	26
6	63	51	43	37	58	47	40	35	40	35	31	34	30	27	28	25	23
7	58	46	38	32	53	43	36	30	37	31	27	31	27	23	26	23	20
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	24	20	18
9	50	38	30	25	46	35	29	24	31	25	21	26	22	19	22	19	16
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3216	3216	3216
5°	3216	3164	3188
10°	3185	3115	3140
15°	3133	3057	3068
20°	3064	2978	2994
25°	2996	2887	2910
30°	2912	2800	2804
35°	2831	2700	2692
40°	2734	2598	2585
45°	2636	2496	2475
50°	2528	2388	2349
55°	2416	2264	2231
60°	2288	2118	2097
65°	2148	1965	1939
70°	1970	1778	1766
75°	1725	1555	1601
80°	1427	1269	1300
85°	969	802	814

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2636 cd/sqm

TEST NUMBER: P924721

CATALOG NUMBER: DFN2DIP-PN2F0-040D040US950-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	139.8	1.8
10°-20°	393.2	5.2
20°-30°	577.9	7.6
30°-40°	671.2	8.9
40°-50°	670.3	8.9
50°-60°	584.5	7.7
60°-70°	432.1	5.7
70°-80°	244.5	3.2
80°-90°	66.8	0.9
90°-100°	42.5	0.6
100°-110°	158.3	2.1
110°-120°	419.9	5.6
120°-130°	696.4	9.2
130°-140°	739.7	9.8
140°-150°	687.5	9.1
150°-160°	552.7	7.3
160°-170°	356.1	4.7
170°-180°	122.6	1.6
0°-30°	1110.8	14.7
0°-40°	1782.0	23.6
0°-60°	3036.8	40.2
0°-90°	3780.1	50.0
90°-120°	620.6	8.2
90°-150°	2744.1	36.3
90°-180°	3776.0	50.0
0°-180°	7555.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1485	1485	1485	1485	1485	
5°	1485	1479	1463	1475	1472	141
15°	1413	1405	1386	1392	1385	398
25°	1279	1268	1244	1246	1244	589
35°	1104	1090	1067	1058	1051	689
45°	898	888	867	851	845	693
55°	680	671	654	637	630	608
65°	458	450	436	423	416	453
75°	240	237	230	221	224	256
85°	58	57	56	51	50	65
90°	1	11	19	23	25	7
95°	60	30	36	41	40	72
105°	283	311	57	67	71	303
115°	536	552	575	144	76	527
125°	758	770	787	794	797	676
135°	938	952	961	970	968	724
145°	1088	1087	1102	1109	1104	680
155°	1198	1189	1200	1206	1198	552
165°	1262	1256	1259	1266	1259	356
175°	1291	1284	1286	1292	1283	123
180°	1288	1288	1288	1288	1288	

TEST NUMBER: P924721

CATALOG NUMBER: DFN2DIP-PN2F0-040D040US950-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1484.8	1484.8	1484.8	1484.8	1484.8
2.5°	1493.5	1486.3	1470.6	1484.8	1482.1
5°	1484.8	1479.2	1463.4	1474.8	1472.1
7.5°	1474.8	1466.3	1450.6	1462.1	1459.2
10°	1459.2	1449.2	1432.1	1443.5	1439.2
12.5°	1437.7	1429.2	1412.1	1419.3	1416.3
15°	1413.4	1405.0	1386.4	1392.1	1385.0
17.5°	1383.5	1375.0	1356.4	1363.5	1356.4
20°	1350.6	1342.1	1322.1	1326.3	1320.8
22.5°	1317.9	1305.0	1286.4	1286.4	1283.5
25°	1279.2	1267.9	1243.6	1246.4	1243.6
27.5°	1236.4	1226.4	1208.0	1203.7	1196.6
30°	1193.6	1182.2	1160.8	1156.5	1150.8
32.5°	1147.9	1139.5	1116.6	1108.0	1102.2
35°	1103.7	1089.5	1066.6	1058.0	1050.8
37.5°	1053.7	1040.8	1017.9	1008.0	1000.8
40°	1002.4	990.8	967.9	955.2	949.5
42.5°	952.4	940.8	918.1	903.7	895.2
45°	898.1	888.2	866.6	851.1	845.2
47.5°	845.2	835.2	812.4	796.7	788.2
50°	789.5	782.4	762.4	742.4	735.2
52.5°	735.2	725.3	706.8	691.1	681.1
55°	679.7	671.0	654.0	636.8	629.7
57.5°	623.9	616.9	598.2	581.1	575.4
60°	568.2	562.6	542.6	526.9	522.6
62.5°	514.0	504.0	489.8	475.5	469.7
65°	458.4	449.7	435.5	422.6	415.6
67.5°	401.3	394.0	381.3	371.3	365.6
70°	348.4	342.7	329.8	319.8	314.2
72.5°	294.2	288.4	281.3	271.3	267.0
75°	239.8	237.1	229.8	221.3	224.2
77.5°	191.3	185.6	182.7	178.4	174.2
80°	142.8	141.3	138.4	134.2	131.4
82.5°	97.1	97.1	95.8	90.0	90.0
85°	58.5	57.1	55.7	51.3	50.0
87.5°	25.8	22.9	20.0	15.7	14.2
90°	0.9	11.2	18.6	23.4	25.1
92.5°	23.4	19.6	22.3	24.2	25.1
95°	60.5	29.8	36.3	41.0	40.1
97.5°	109.0	32.6	47.5	50.4	51.2
100°	164.9	37.3	53.1	60.5	62.4
102.5°	226.4	224.7	55.0	65.2	68.0
105°	283.2	311.3	56.9	67.1	70.8
107.5°	349.5	372.7	58.8	69.0	72.7
110°	412.9	432.4	163.1	69.9	73.6

TEST NUMBER: P924721

CATALOG NUMBER: DFN2DIP-PN2F0-040D040US950-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	472.5	489.2	473.4	71.7	74.6
115°	535.8	551.6	575.0	143.5	76.5
117.5°	590.8	609.4	625.3	492.0	247.8
120°	652.3	666.3	683.1	694.3	568.5
122.5°	704.4	719.4	738.1	743.6	744.6
125°	757.6	769.8	787.4	794.0	796.8
127.5°	806.0	819.1	833.1	842.5	843.3
130°	851.7	866.7	876.8	887.1	886.3
132.5°	898.3	910.5	920.7	929.1	928.2
135°	937.5	952.5	960.8	970.1	968.3
137.5°	978.4	989.6	999.0	1008.3	1005.5
140°	1018.5	1026.0	1036.2	1044.6	1040.0
142.5°	1052.2	1058.7	1070.8	1078.1	1073.5
145°	1087.6	1086.6	1102.3	1108.9	1104.3
147.5°	1118.2	1115.4	1131.3	1135.9	1132.3
150°	1148.0	1141.6	1156.5	1162.1	1157.4
152.5°	1173.2	1165.8	1179.7	1185.3	1178.9
155°	1197.5	1189.2	1200.3	1205.9	1198.4
157.5°	1217.0	1209.6	1218.1	1224.6	1217.0
160°	1233.8	1228.2	1233.8	1239.3	1232.9
162.5°	1248.7	1243.2	1247.8	1254.3	1245.9
165°	1261.8	1256.2	1259.0	1265.5	1259.0
167.5°	1272.1	1266.3	1269.3	1275.8	1267.4
170°	1280.5	1274.8	1276.6	1283.2	1274.8
172.5°	1286.0	1280.5	1282.4	1288.9	1280.5
175°	1290.6	1284.1	1286.0	1292.5	1283.2
177.5°	1292.5	1286.0	1286.9	1293.5	1285.1
180°	1287.9	1287.9	1287.9	1287.9	1287.9

TEST NUMBER: P924721

CATALOG NUMBER: DFN2DIP-PN2F0-040D040US950-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.22	12.08	12.17	13.05	14.32	10.78	11.64	11.74	12.61	13.88
	3H	12.86	13.63	13.83	14.61	15.90	12.38	13.15	13.35	14.13	15.42
	4H	13.43	14.16	14.41	15.15	16.45	12.95	13.68	13.93	14.67	15.97
	6H	13.82	14.49	14.81	15.48	16.79	13.33	14.00	14.32	14.99	16.31
	8H	13.91	14.55	14.91	15.56	16.87	13.43	14.07	14.42	15.07	16.39
	12H	13.95	14.56	14.96	15.56	16.90	13.46	14.07	14.46	15.07	16.41
4H	2H	11.67	12.40	12.66	13.39	14.69	11.32	12.05	12.31	13.04	14.34
	3H	13.51	14.12	14.51	15.14	16.45	13.11	13.72	14.11	14.74	16.05
	4H	14.21	14.77	15.21	15.77	17.11	13.79	14.35	14.80	15.36	16.70
	6H	14.70	15.19	15.72	16.22	17.55	14.28	14.77	15.30	15.80	17.13
	8H	14.84	15.29	15.86	16.32	17.67	14.42	14.87	15.44	15.89	17.24
	12H	14.91	15.31	15.94	16.35	17.71	14.47	14.88	15.51	15.92	17.28
8H	4H	14.39	14.84	15.41	15.87	17.22	14.03	14.47	15.04	15.50	16.85
	6H	15.00	15.37	16.04	16.44	17.79	14.63	15.00	15.67	16.06	17.41
	8H	15.21	15.53	16.26	16.59	17.95	14.83	15.15	15.88	16.21	17.57
	12H	15.33	15.61	16.38	16.66	18.07	14.93	15.22	15.98	16.26	17.67
12H	4H	14.38	14.78	15.41	15.82	17.18	14.02	14.42	15.05	15.46	16.82
	6H	15.03	15.35	16.08	16.40	17.77	14.66	14.99	15.71	16.04	17.41
	8H	15.25	15.54	16.31	16.59	18.00	14.88	15.17	15.94	16.22	17.63

END OF REPORT