

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P902995

Luminaire Tested: DFN2DIP-PN3F0-040D070US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P902995
REPORT IS A COMBINATION OF REPORTS P901090 AND P897955
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-040D070US830-RLONL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9736.4 lumens
Efficiency: N/A
Efficacy: 109.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 89
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P902995
CATALOG NUMBER: DFN2DIP-PN3F0-040D070US830-RLLONL

Luminous Intensity Polar Plot

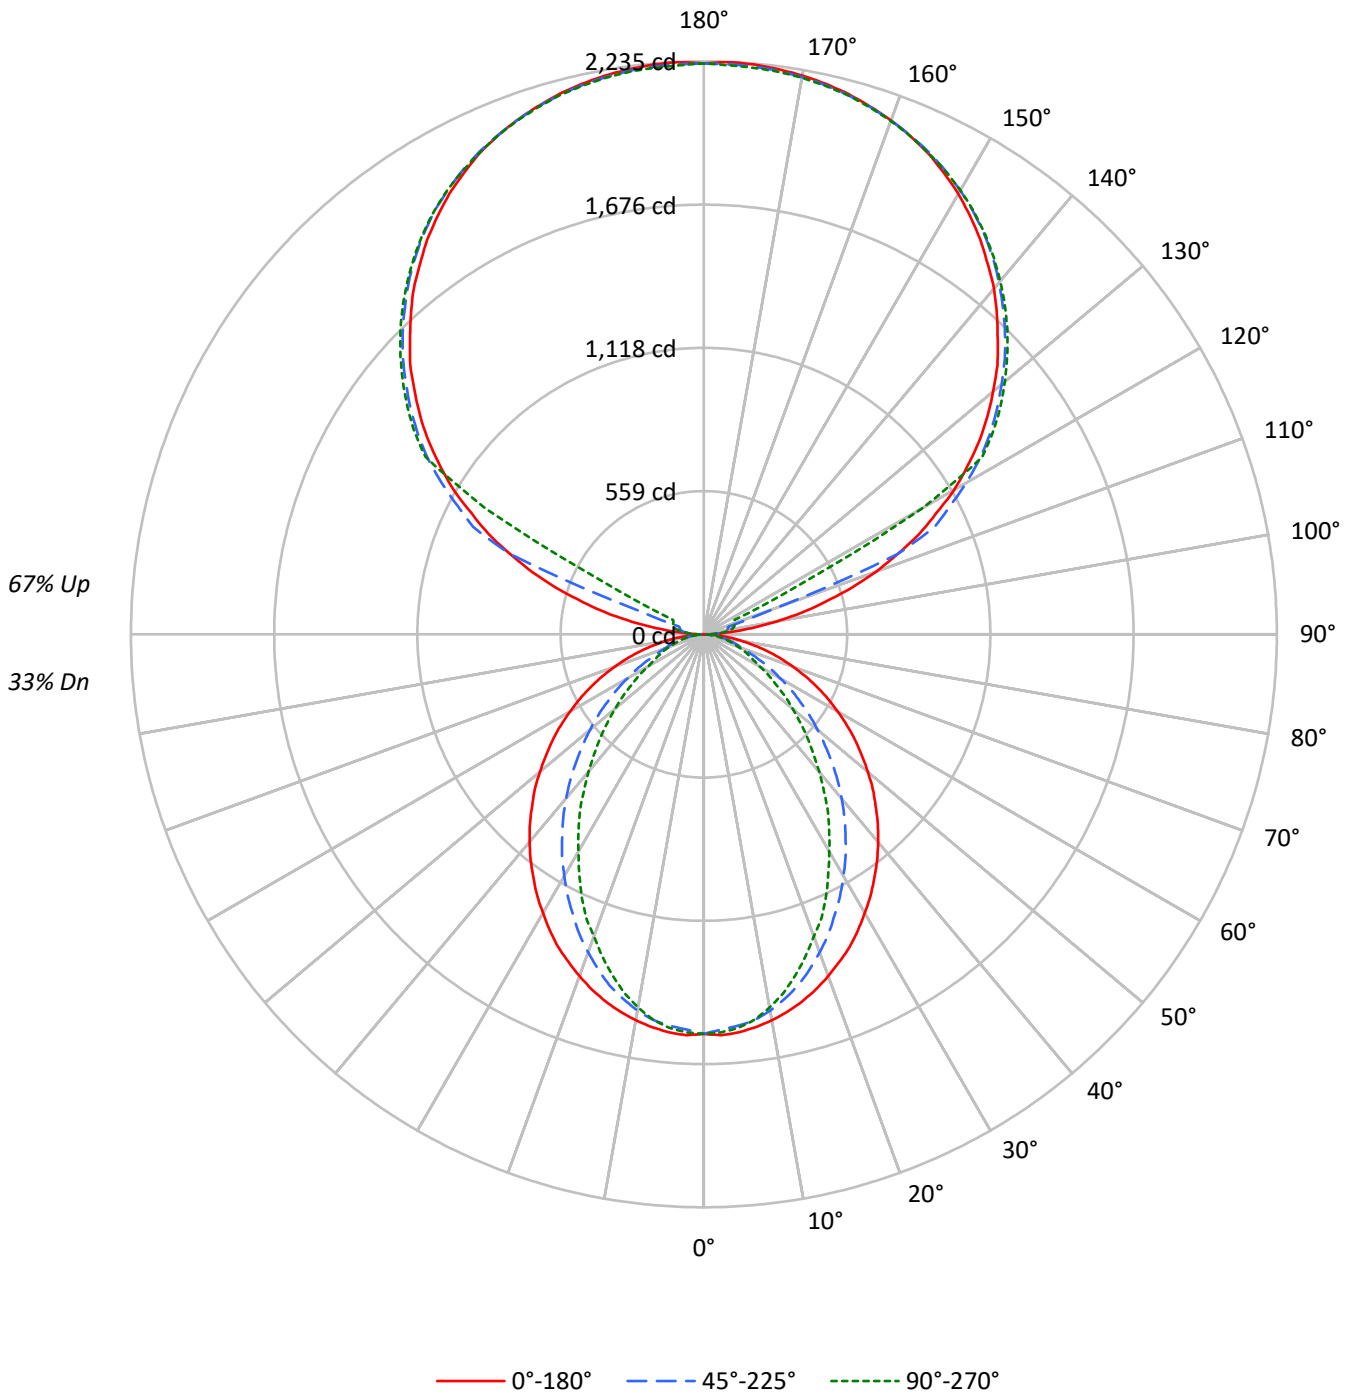



TEST NUMBER: P902995
 CATALOG NUMBER: DFN2DIP-PN3F0-040D070US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33				33
1	94	90	87	83	85	81	78	76	65	63	61	50	49	48	36	35	35	28				28
2	86	79	73	68	77	72	67	62	57	54	51	44	42	40	32	31	30	24				24
3	79	70	63	57	71	63	57	53	51	47	43	39	37	34	29	27	26	21				21
4	72	62	54	49	65	56	50	45	45	41	37	35	32	30	26	24	22	18				18
5	66	55	47	42	59	50	43	38	41	36	32	32	28	26	24	21	20	16				16
6	61	49	42	36	55	45	38	33	37	32	28	29	25	23	21	19	17	14				14
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	20	17	16	13				13
8	52	41	33	28	47	37	31	26	30	25	22	24	21	18	18	16	14	12				12
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13	10				10
10	45	34	27	22	41	31	25	21	26	21	18	20	17	15	16	13	12	10				10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1822	1822	1822
5°	1823	1791	1803
10°	1804	1755	1744
15°	1778	1696	1652
20°	1744	1614	1541
25°	1710	1524	1432
30°	1663	1431	1296
35°	1618	1331	1175
40°	1572	1228	1038
45°	1518	1114	913
50°	1462	999	791
55°	1404	876	674
60°	1337	747	555
65°	1259	617	498
70°	1165	495	449
75°	1046	434	407
80°	875	360	351
85°	594	234	259

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1518 cd/sqm



TEST NUMBER: P902995

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.0	1.5
10°-20°	400.9	4.1
20°-30°	562.8	5.8
30°-40°	613.5	6.3
40°-50°	563.9	5.8
50°-60°	442.9	4.5
60°-70°	288.3	3.0
70°-80°	148.4	1.5
80°-90°	41.8	0.4
90°-100°	73.4	0.8
100°-110°	273.7	2.8
110°-120°	725.9	7.5
120°-130°	1204.0	12.4
130°-140°	1278.9	13.1
140°-150°	1188.6	12.2
150°-160°	955.6	9.8
160°-170°	615.8	6.3
170°-180°	211.9	2.2
0°-30°	1109.8	11.4
0°-40°	1723.3	17.7
0°-60°	2730.1	28.0
0°-90°	3208.5	33.0
90°-120°	1073.0	11.0
90°-150°	4744.6	48.7
90°-180°	6528.0	67.0
0°-180°	9736.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1558	1558	1558	1558	1558	
5°	1558	1551	1533	1546	1541	148
15°	1482	1466	1419	1392	1378	418
25°	1345	1300	1207	1149	1128	619
35°	1159	1087	963	874	843	726
45°	948	853	705	605	571	732
55°	721	611	458	374	347	644
65°	486	372	245	198	193	482
75°	259	161	113	103	102	274
85°	61	31	27	27	27	70
90°	2	19	32	40	44	9
95°	105	52	63	71	69	124
105°	490	538	98	116	122	523
115°	926	954	994	248	132	912
125°	1310	1331	1362	1373	1378	1168
135°	1621	1647	1661	1677	1674	1252
145°	1880	1879	1906	1917	1909	1176
155°	2070	2056	2075	2085	2072	954
165°	2182	2172	2177	2188	2177	616
175°	2232	2220	2224	2235	2219	212
180°	2227	2227	2227	2227	2227	



TEST NUMBER: P902995

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1558.2	1558.2	1558.2	1558.2	1558.2
2.5°	1565.3	1558.2	1542.7	1556.9	1554.0
5°	1558.2	1551.1	1532.8	1545.5	1541.3
7.5°	1545.5	1537.1	1517.4	1522.9	1515.9
10°	1528.6	1518.7	1490.5	1486.2	1477.9
12.5°	1507.5	1494.8	1456.6	1448.2	1432.7
15°	1482.1	1466.5	1418.6	1391.9	1377.8
17.5°	1452.5	1429.8	1370.6	1339.6	1317.0
20°	1418.6	1390.3	1319.8	1284.7	1253.6
22.5°	1382.0	1349.5	1267.6	1219.7	1198.7
25°	1345.3	1300.1	1207.0	1149.3	1128.0
27.5°	1301.7	1253.6	1150.7	1084.4	1051.9
30°	1255.1	1201.4	1088.5	1016.7	978.6
32.5°	1209.9	1145.0	1029.4	944.8	909.5
35°	1159.2	1087.2	963.2	874.3	843.2
37.5°	1109.8	1032.2	901.1	803.7	768.5
40°	1057.6	973.1	836.2	736.1	699.5
42.5°	1004.0	913.8	771.4	666.9	631.8
45°	947.6	853.1	705.1	604.9	571.1
47.5°	894.1	794.0	641.7	541.5	510.5
50°	834.8	734.7	579.6	482.2	452.7
52.5°	776.9	671.2	520.4	427.3	400.5
55°	720.6	610.6	458.3	373.7	346.9
57.5°	662.8	550.0	403.3	324.3	301.8
60°	603.5	490.7	345.4	273.6	251.1
62.5°	545.8	433.0	296.1	228.5	217.3
65°	486.5	372.2	245.3	197.5	193.1
67.5°	430.2	315.8	197.5	173.4	169.2
70°	370.9	260.9	163.5	149.5	143.7
72.5°	314.5	210.1	136.8	125.5	122.7
75°	259.4	160.7	112.8	102.9	101.6
77.5°	204.5	114.1	88.9	83.2	80.3
80°	153.6	81.8	67.6	62.1	62.1
82.5°	107.2	55.0	46.6	43.6	43.6
85°	60.6	31.0	26.8	26.8	26.8
87.5°	22.6	11.2	11.2	9.9	9.9
90°	1.5	19.3	32.1	40.3	43.5
92.5°	40.3	33.8	38.6	41.9	43.5
95°	104.6	51.5	62.8	71.0	69.3
97.5°	188.4	56.5	82.1	87.1	88.6
100°	285.3	64.5	91.8	104.6	107.9
102.5°	391.4	388.4	95.1	112.7	117.6
105°	489.8	538.2	98.3	115.9	122.4
107.5°	604.2	644.4	101.6	119.2	125.7
110°	713.9	747.5	282.0	120.9	127.2



TEST NUMBER: P902995

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US830-RLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	817.0	845.8	818.5	123.9	128.9
115°	926.4	953.8	994.1	248.2	132.2
117.5°	1021.5	1053.7	1081.2	850.6	428.6
120°	1127.8	1152.0	1181.1	1200.4	982.9
122.5°	1218.0	1243.8	1276.2	1285.7	1287.4
125°	1309.9	1330.9	1361.5	1372.8	1377.5
127.5°	1393.6	1416.2	1440.5	1456.6	1458.1
130°	1472.6	1498.5	1516.1	1533.9	1532.4
132.5°	1553.2	1574.2	1591.9	1606.4	1604.9
135°	1620.9	1646.7	1661.1	1677.3	1674.1
137.5°	1691.7	1711.1	1727.3	1743.4	1738.6
140°	1761.0	1774.0	1791.6	1806.1	1798.1
142.5°	1819.1	1830.4	1851.2	1864.1	1856.1
145°	1880.4	1878.7	1906.0	1917.3	1909.3
147.5°	1933.3	1928.6	1956.0	1964.0	1957.7
150°	1985.0	1973.8	1999.6	2009.1	2001.1
152.5°	2028.4	2015.6	2039.8	2049.5	2038.2
155°	2070.4	2056.0	2075.3	2084.9	2072.1
157.5°	2104.2	2091.4	2105.9	2117.2	2104.2
160°	2133.4	2123.5	2133.4	2142.9	2131.6
162.5°	2159.0	2149.4	2157.4	2168.7	2154.2
165°	2181.5	2172.0	2176.7	2188.0	2176.7
167.5°	2199.3	2189.5	2194.5	2205.8	2191.3
170°	2213.8	2204.1	2207.3	2218.7	2204.1
172.5°	2223.5	2213.8	2217.1	2228.4	2213.8
175°	2231.5	2220.2	2223.5	2234.7	2218.7
177.5°	2234.7	2223.5	2225.2	2236.5	2221.9
180°	2226.7	2226.7	2226.7	2226.7	2226.7



TEST NUMBER: P902995
 CATALOG NUMBER: DFN2DIP-PN3F0-040D070US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.35	8.06	8.45	9.15	10.65	3.32	4.02	4.41	5.11	6.61
	3H	9.01	9.65	10.12	10.74	12.26	4.49	5.12	5.59	6.22	7.74
	4H	9.61	10.21	10.73	11.31	12.83	4.93	5.53	6.04	6.63	8.15
	6H	10.02	10.57	11.15	11.68	13.21	5.24	5.79	6.36	6.89	8.43
	8H	10.14	10.67	11.27	11.79	13.31	5.32	5.85	6.45	6.97	8.49
	12H	10.20	10.70	11.33	11.81	13.36	5.36	5.86	6.49	6.97	8.52
4H	2H	7.35	7.95	8.47	9.05	10.57	3.89	4.49	5.01	5.59	7.11
	3H	9.16	9.66	10.29	10.79	12.32	5.22	5.72	6.35	6.85	8.38
	4H	9.85	10.30	10.98	11.42	12.97	5.76	6.22	6.89	7.34	8.89
	6H	10.35	10.74	11.49	11.88	13.42	6.17	6.56	7.31	7.70	9.25
	8H	10.52	10.88	11.65	12.01	13.58	6.29	6.66	7.43	7.79	9.35
	12H	10.60	10.94	11.76	12.08	13.64	6.35	6.68	7.50	7.82	9.39
8H	4H	9.80	10.17	10.94	11.30	12.86	6.03	6.40	7.17	7.53	9.09
	6H	10.36	10.66	11.52	11.83	13.39	6.54	6.84	7.69	8.01	9.57
	8H	10.57	10.83	11.73	11.99	13.56	6.72	6.99	7.89	8.14	9.72
	12H	10.70	10.93	11.87	12.08	13.69	6.83	7.06	8.00	8.21	9.82
12H	4H	9.75	10.08	10.90	11.22	12.79	6.03	6.36	7.18	7.50	9.07
	6H	10.33	10.60	11.50	11.75	13.33	6.58	6.85	7.75	8.00	9.58
	8H	10.54	10.77	11.71	11.92	13.54	6.78	7.01	7.95	8.16	9.78