

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903002

Luminaire Tested: DFN2DIP-PN3F0-040D090US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903002
REPORT IS A COMBINATION OF REPORTS P899598 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-040D090US830-RLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10712.0 lumens
Efficiency: N/A
Efficacy: 101.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 105.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903002

CATALOG NUMBER: DFN2DIP-PN3F0-040D090US830-RLLFLL

Luminous Intensity Polar Plot

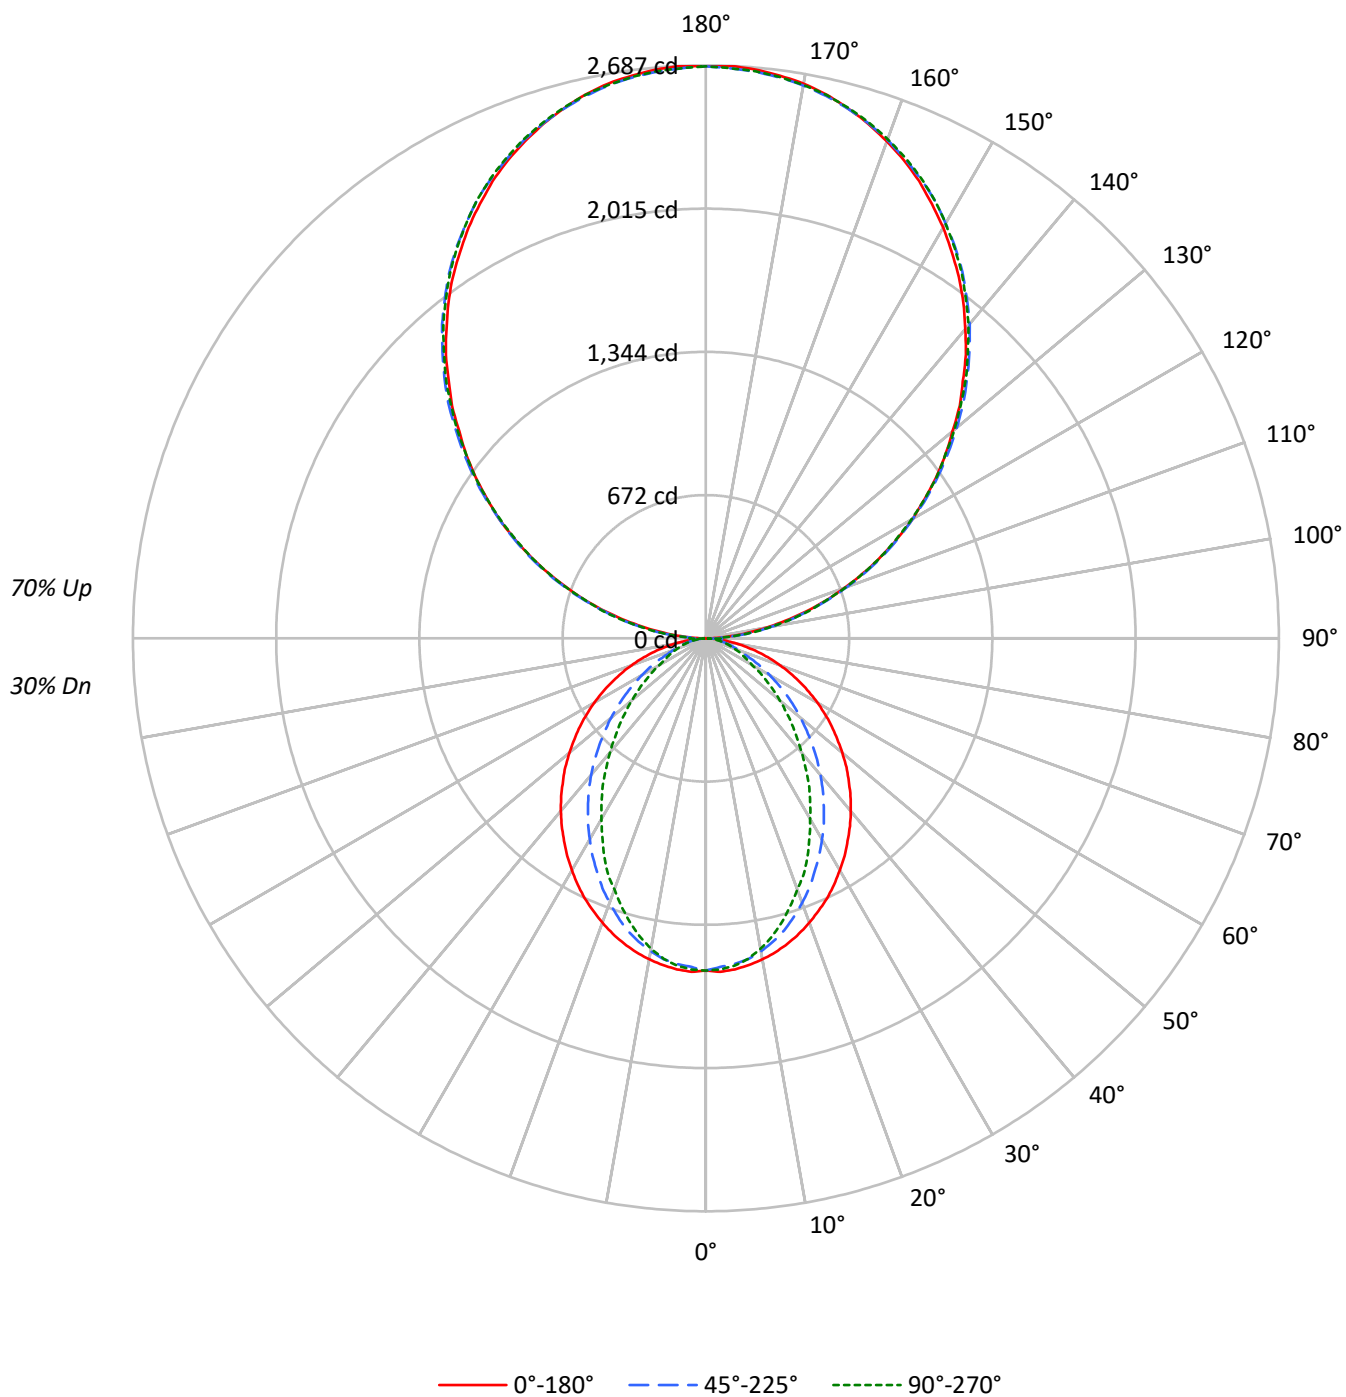

TEST NUMBER: P903002

CATALOG NUMBER: DFN2DIP-PN3F0-040D090US830-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38
1	94	89	86	83	84	80	77	75	64	62	60	48	47	46	34	33	32
2	85	78	73	68	76	71	66	62	56	53	50	43	40	38	30	29	28
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21
5	66	55	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16
7	56	44	37	31	50	40	33	29	32	27	24	25	22	19	18	16	14
8	52	40	33	28	46	36	30	25	29	25	21	23	20	17	17	15	13
9	48	36	29	25	43	33	27	23	27	22	19	21	18	15	16	13	12
10	45	33	27	22	40	30	24	20	25	20	17	19	16	14	14	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1822	1822	1822
5°	1823	1791	1803
10°	1804	1755	1744
15°	1778	1696	1652
20°	1744	1614	1541
25°	1710	1524	1432
30°	1663	1431	1296
35°	1618	1331	1175
40°	1572	1228	1038
45°	1518	1114	913
50°	1462	999	791
55°	1404	876	674
60°	1337	747	555
65°	1259	617	498
70°	1165	495	449
75°	1046	434	407
80°	875	360	351
85°	594	234	259

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2657 cd/sqm

TEST NUMBER: P903002

CATALOG NUMBER: DFN2DIP-PN3F0-040D090US830-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.0	1.4
10°-20°	400.9	3.7
20°-30°	562.8	5.3
30°-40°	613.5	5.7
40°-50°	563.9	5.3
50°-60°	442.9	4.1
60°-70°	288.3	2.7
70°-80°	148.4	1.4
80°-90°	45.5	0.4
90°-100°	166.0	1.5
100°-110°	527.5	4.9
110°-120°	902.7	8.4
120°-130°	1187.2	11.1
130°-140°	1332.5	12.4
140°-150°	1306.7	12.2
150°-160°	1096.1	10.2
160°-170°	726.9	6.8
170°-180°	254.1	2.4
0°-30°	1109.8	10.4
0°-40°	1723.3	16.1
0°-60°	2730.1	25.5
0°-90°	3212.2	30.0
90°-120°	1596.2	14.9
90°-150°	5422.6	50.6
90°-180°	7500.0	70.0
0°-180°	10712.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1558	1558	1558	1558	1558	
5°	1558	1551	1533	1546	1541	148
15°	1482	1466	1419	1392	1378	418
25°	1345	1300	1207	1149	1128	619
35°	1159	1087	963	874	843	726
45°	948	853	705	605	571	732
55°	721	611	458	374	347	644
65°	486	372	245	198	193	482
75°	259	161	113	103	102	274
85°	61	31	27	27	27	70
90°	2	29	79	74	77	11
95°	118	141	145	145	141	131
105°	487	493	498	502	502	514
115°	906	919	915	912	906	896
125°	1318	1338	1331	1324	1322	1177
135°	1704	1729	1734	1732	1725	1317
145°	2069	2085	2098	2100	2092	1293
155°	2366	2372	2380	2391	2384	1089
165°	2574	2571	2571	2587	2576	726
175°	2678	2671	2667	2683	2669	254
180°	2683	2683	2683	2683	2683	

TEST NUMBER: P903002

CATALOG NUMBER: DFN2DIP-PN3F0-040D090US830-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1558.2	1558.2	1558.2	1558.2	1558.2
2.5°	1565.3	1558.2	1542.7	1556.9	1554.0
5°	1558.2	1551.1	1532.8	1545.5	1541.3
7.5°	1545.5	1537.1	1517.4	1522.9	1515.9
10°	1528.6	1518.7	1490.5	1486.2	1477.9
12.5°	1507.5	1494.8	1456.6	1448.2	1432.7
15°	1482.1	1466.5	1418.6	1391.9	1377.8
17.5°	1452.5	1429.8	1370.6	1339.6	1317.0
20°	1418.6	1390.3	1319.8	1284.7	1253.6
22.5°	1382.0	1349.5	1267.6	1219.7	1198.7
25°	1345.3	1300.1	1207.0	1149.3	1128.0
27.5°	1301.7	1253.6	1150.7	1084.4	1051.9
30°	1255.1	1201.4	1088.5	1016.7	978.6
32.5°	1209.9	1145.0	1029.4	944.8	909.5
35°	1159.2	1087.2	963.2	874.3	843.2
37.5°	1109.8	1032.2	901.1	803.7	768.5
40°	1057.6	973.1	836.2	736.1	699.5
42.5°	1004.0	913.8	771.4	666.9	631.8
45°	947.6	853.1	705.1	604.9	571.1
47.5°	894.1	794.0	641.7	541.5	510.5
50°	834.8	734.7	579.6	482.2	452.7
52.5°	776.9	671.2	520.4	427.3	400.5
55°	720.6	610.6	458.3	373.7	346.9
57.5°	662.8	550.0	403.3	324.3	301.8
60°	603.5	490.7	345.4	273.6	251.1
62.5°	545.8	433.0	296.1	228.5	217.3
65°	486.5	372.2	245.3	197.5	193.1
67.5°	430.2	315.8	197.5	173.4	169.2
70°	370.9	260.9	163.5	149.5	143.7
72.5°	314.5	210.1	136.8	125.5	122.7
75°	259.4	160.7	112.8	102.9	101.6
77.5°	204.5	114.1	88.9	83.2	80.3
80°	153.6	81.8	67.6	62.1	62.1
82.5°	107.2	55.0	46.6	43.6	43.6
85°	60.6	31.0	26.8	26.8	26.8
87.5°	22.6	11.2	11.2	9.9	9.9
90°	2.5	29.1	79.3	74.4	76.8
92.5°	50.1	68.0	70.4	72.8	72.8
95°	118.1	140.7	144.8	144.8	140.7
97.5°	196.5	217.5	226.5	226.5	226.5
100°	287.1	305.8	312.2	312.2	309.8
102.5°	382.6	396.3	405.2	407.6	405.2
105°	486.9	493.3	498.2	502.3	502.3
107.5°	590.4	600.1	600.1	601.7	590.4
110°	690.7	703.7	703.7	703.7	697.2

TEST NUMBER: P903002

CATALOG NUMBER: DFN2DIP-PN3F0-040D090US830-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	799.1	812.8	810.4	804.0	799.1
115°	905.9	918.8	914.7	912.4	905.9
117.5°	1011.8	1029.6	1018.3	1011.8	1005.3
120°	1118.6	1136.3	1118.6	1118.6	1111.3
122.5°	1215.6	1238.3	1227.0	1220.5	1215.6
125°	1317.6	1337.8	1331.3	1324.0	1321.6
127.5°	1417.0	1442.1	1433.2	1423.5	1417.0
130°	1510.0	1539.2	1535.1	1530.2	1521.4
132.5°	1614.4	1637.0	1638.6	1627.3	1620.9
135°	1704.1	1729.2	1734.1	1731.6	1725.2
137.5°	1804.4	1824.7	1828.7	1827.1	1817.4
140°	1892.6	1912.8	1924.1	1924.1	1915.2
142.5°	1983.2	2003.4	2009.9	2012.3	2003.4
145°	2069.0	2085.1	2098.0	2100.5	2091.6
147.5°	2145.8	2166.0	2175.7	2179.7	2170.9
150°	2225.1	2238.8	2247.7	2254.9	2247.7
152.5°	2295.4	2309.1	2320.4	2329.4	2320.4
155°	2365.8	2372.2	2379.5	2390.9	2383.6
157.5°	2426.4	2431.3	2435.3	2451.5	2440.1
160°	2480.6	2485.5	2487.9	2501.6	2491.9
162.5°	2530.7	2530.7	2533.2	2548.5	2537.2
165°	2573.6	2571.2	2571.2	2587.4	2576.1
167.5°	2612.4	2605.2	2605.2	2621.3	2610.0
170°	2641.6	2635.1	2632.7	2648.8	2635.1
172.5°	2661.7	2655.3	2652.9	2669.1	2655.3
175°	2678.0	2671.4	2666.6	2682.9	2669.1
177.5°	2686.8	2680.4	2675.5	2689.3	2675.5
180°	2682.9	2682.9	2682.9	2682.9	2682.9

TEST NUMBER: P903002

CATALOG NUMBER: DFN2DIP-PN3F0-040D090US830-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.95	7.64	8.07	8.75	10.29	2.92	3.61	4.04	4.72	6.25
	3H	8.62	9.23	9.74	10.35	11.90	4.09	4.71	5.22	5.82	7.37
	4H	9.21	9.80	10.35	10.92	12.47	4.53	5.12	5.67	6.23	7.79
	6H	9.62	10.16	10.77	11.28	12.85	4.84	5.38	5.98	6.50	8.06
	8H	9.74	10.25	10.89	11.39	12.95	4.92	5.43	6.07	6.57	8.13
	12H	9.80	10.28	10.95	11.41	12.99	4.96	5.44	6.11	6.57	8.15
4H	2H	6.95	7.54	8.10	8.66	10.21	3.49	4.08	4.64	5.20	6.75
	3H	8.76	9.25	9.91	10.39	11.96	4.82	5.31	5.97	6.45	8.02
	4H	9.44	9.89	10.59	11.02	12.61	5.36	5.81	6.51	6.94	8.53
	6H	9.95	10.33	11.10	11.48	13.06	5.77	6.15	6.92	7.31	8.88
	8H	10.12	10.47	11.27	11.62	13.21	5.89	6.25	7.04	7.39	8.99
	12H	10.20	10.52	11.37	11.68	13.28	5.94	6.27	7.12	7.43	9.02
8H	4H	9.40	9.76	10.56	10.90	12.50	5.63	5.99	6.78	7.13	8.73
	6H	9.95	10.25	11.13	11.44	13.03	6.13	6.43	7.31	7.62	9.21
	8H	10.17	10.42	11.35	11.59	13.20	6.32	6.58	7.50	7.74	9.35
	12H	10.29	10.52	11.48	11.68	13.33	6.43	6.65	7.61	7.82	9.46
12H	4H	9.35	9.67	10.52	10.83	12.43	5.63	5.95	6.80	7.11	8.71
	6H	9.93	10.19	11.11	11.35	12.96	6.18	6.44	7.36	7.61	9.22
	8H	10.14	10.36	11.32	11.53	13.17	6.38	6.61	7.56	7.77	9.41

END OF REPORT