

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905708

Luminaire Tested: DFN2DIP-PN3F0-040D040US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905708
REPORT IS A COMBINATION OF REPORTS P899527 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-040D040US835-FLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7500.0 lumens
Efficiency: N/A
Efficacy: 115.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 64.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905708
CATALOG NUMBER: DFN2DIP-PN3F0-040D040US835-FLLFLL

Luminous Intensity Polar Plot

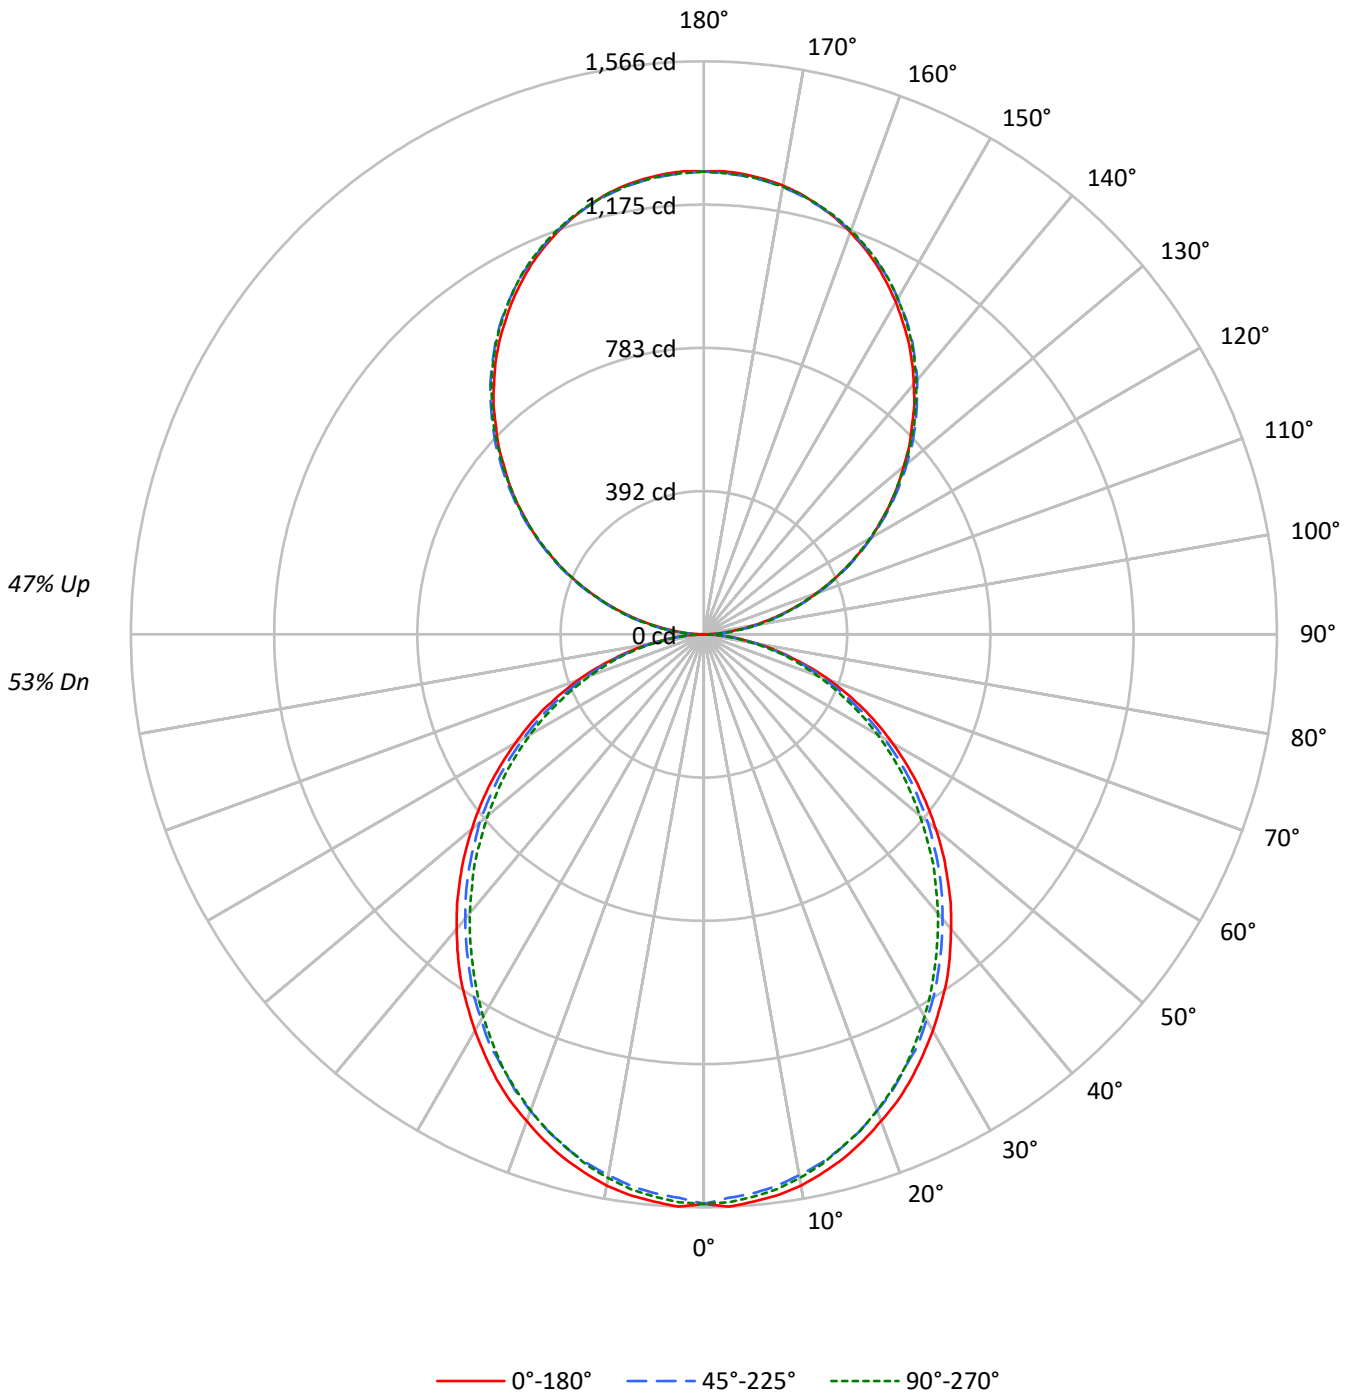



TEST NUMBER: P905708

CATALOG NUMBER: DFN2DIP-PN3F0-040D040US835-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	37
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	21
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21	18
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1819	1819	1819
5°	1821	1793	1805
10°	1805	1767	1780
15°	1778	1737	1741
20°	1741	1695	1701
25°	1704	1646	1655
30°	1658	1599	1597
35°	1615	1545	1536
40°	1561	1490	1477
45°	1508	1435	1417
50°	1450	1377	1347
55°	1388	1310	1283
60°	1319	1230	1210
65°	1243	1148	1123
70°	1147	1047	1030
75°	1014	927	943
80°	852	773	778
85°	601	511	507

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1508 cd/sqm



TEST NUMBER: P905708

CATALOG NUMBER: DFN2DIP-PN3F0-040D040US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.5	2.0
10°-20°	412.2	5.5
20°-30°	605.7	8.1
30°-40°	703.5	9.4
40°-50°	702.6	9.4
50°-60°	612.7	8.2
60°-70°	452.9	6.0
70°-80°	256.2	3.4
80°-90°	71.2	0.9
90°-100°	78.3	1.0
100°-110°	248.7	3.3
110°-120°	425.6	5.7
120°-130°	559.8	7.5
130°-140°	628.3	8.4
140°-150°	616.2	8.2
150°-160°	516.9	6.9
160°-170°	342.8	4.6
170°-180°	119.8	1.6
0°-30°	1164.4	15.5
0°-40°	1867.9	24.9
0°-60°	3183.2	42.4
0°-90°	3963.6	52.8
90°-120°	752.7	10.0
90°-150°	2556.9	34.1
90°-180°	3536.0	47.1
0°-180°	7500.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1556	1556	1556	1556	1556	
5°	1556	1550	1534	1546	1543	148
15°	1482	1473	1453	1459	1452	417
25°	1341	1329	1304	1306	1304	617
35°	1157	1142	1118	1109	1102	722
45°	941	931	908	892	886	727
55°	712	703	686	668	660	637
65°	480	471	456	443	436	475
75°	251	248	241	232	235	268
85°	61	60	58	54	52	68
90°	1	14	37	35	36	7
95°	56	66	68	68	66	62
105°	230	233	235	237	237	242
115°	427	433	431	430	427	422
125°	621	631	628	624	623	555
135°	804	815	818	816	814	621
145°	976	983	989	990	986	610
155°	1116	1119	1122	1127	1124	513
165°	1214	1212	1212	1220	1215	342
175°	1263	1260	1257	1265	1259	120
180°	1265	1265	1265	1265	1265	



TEST NUMBER: P905708

CATALOG NUMBER: DFN2DIP-PN3F0-040D040US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1556.4	1556.4	1556.4	1556.4	1556.4
2.5°	1565.5	1558.0	1541.5	1556.4	1553.6
5°	1556.4	1550.5	1534.0	1545.9	1543.1
7.5°	1545.9	1537.0	1520.5	1532.6	1529.6
10°	1529.6	1519.1	1501.2	1513.1	1508.6
12.5°	1507.0	1498.1	1480.2	1487.7	1484.6
15°	1481.6	1472.7	1453.2	1459.2	1451.8
17.5°	1450.2	1441.3	1421.8	1429.2	1421.8
20°	1415.7	1406.8	1385.9	1390.3	1384.5
22.5°	1381.4	1367.9	1348.4	1348.4	1345.4
25°	1340.9	1329.0	1303.6	1306.5	1303.6
27.5°	1296.0	1285.5	1266.2	1261.7	1254.3
30°	1251.2	1239.2	1216.8	1212.3	1206.3
32.5°	1203.3	1194.4	1170.4	1161.4	1155.3
35°	1156.9	1142.0	1118.0	1109.0	1101.5
37.5°	1104.5	1091.0	1067.0	1056.6	1049.1
40°	1050.7	1038.6	1014.6	1001.3	995.3
42.5°	998.3	986.2	962.4	947.3	938.4
45°	941.4	931.0	908.4	892.1	886.0
47.5°	886.0	875.5	851.6	835.1	826.2
50°	827.6	820.1	799.2	778.2	770.7
52.5°	770.7	760.3	740.9	724.4	713.9
55°	712.5	703.4	685.5	667.5	660.1
57.5°	654.0	646.6	627.0	609.1	603.1
60°	595.6	589.7	568.8	552.3	547.8
62.5°	538.8	528.3	513.4	498.4	492.4
65°	480.5	471.4	456.5	443.0	435.6
67.5°	420.6	413.0	399.7	389.2	383.2
70°	365.2	359.2	345.7	335.2	329.3
72.5°	308.4	302.3	294.9	284.4	279.9
75°	251.4	248.5	240.9	232.0	235.0
77.5°	200.5	194.5	191.5	187.0	182.6
80°	149.7	148.1	145.1	140.7	137.7
82.5°	101.8	101.8	100.4	94.3	94.3
85°	61.3	59.9	58.4	53.8	52.4
87.5°	27.0	24.0	21.0	16.5	14.9
90°	1.1	13.7	37.4	35.1	36.2
92.5°	23.6	32.0	33.2	34.3	34.3
95°	55.7	66.4	68.3	68.3	66.4
97.5°	92.7	102.6	106.8	106.8	106.8
100°	135.4	144.2	147.2	147.2	146.1
102.5°	180.4	186.9	191.1	192.2	191.1
105°	229.6	232.6	234.9	236.8	236.8
107.5°	278.4	283.0	283.0	283.7	278.4
110°	325.7	331.8	331.8	331.8	328.8



TEST NUMBER: P905708

CATALOG NUMBER: DFN2DIP-PN3F0-040D040US835-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	376.8	383.3	382.1	379.1	376.8
115°	427.1	433.3	431.3	430.2	427.1
117.5°	477.1	485.5	480.2	477.1	474.1
120°	527.5	535.8	527.5	527.5	524.0
122.5°	573.2	583.9	578.6	575.5	573.2
125°	621.3	630.8	627.8	624.3	623.2
127.5°	668.2	680.0	675.8	671.2	668.2
130°	712.0	725.8	723.9	721.6	717.4
132.5°	761.2	771.9	772.7	767.3	764.3
135°	803.6	815.4	817.7	816.5	813.5
137.5°	850.9	860.4	862.3	861.5	857.0
140°	892.4	902.0	907.3	907.3	903.1
142.5°	935.2	944.7	947.7	948.9	944.7
145°	975.6	983.2	989.3	990.5	986.3
147.5°	1011.8	1021.3	1025.9	1027.8	1023.6
150°	1049.2	1055.7	1059.9	1063.3	1059.9
152.5°	1082.4	1088.8	1094.2	1098.4	1094.2
155°	1115.5	1118.6	1122.0	1127.4	1123.9
157.5°	1144.2	1146.4	1148.3	1156.0	1150.6
160°	1169.7	1172.0	1173.1	1179.6	1175.0
162.5°	1193.3	1193.3	1194.5	1201.7	1196.4
165°	1213.6	1212.4	1212.4	1220.0	1214.7
167.5°	1231.9	1228.4	1228.4	1236.1	1230.7
170°	1245.6	1242.5	1241.4	1249.0	1242.5
172.5°	1255.1	1252.1	1250.9	1258.6	1252.1
175°	1262.8	1259.7	1257.4	1265.0	1258.6
177.5°	1267.0	1263.9	1261.6	1268.1	1261.6
180°	1265.0	1265.0	1265.0	1265.0	1265.0



TEST NUMBER: P905708
 CATALOG NUMBER: DFN2DIP-PN3F0-040D040US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.57	10.46	10.50	11.41	12.64	9.13	10.02	10.06	10.97	12.20
	3H	11.23	12.02	12.17	12.98	14.24	10.74	11.54	11.69	12.50	13.75
	4H	11.81	12.57	12.77	13.53	14.79	11.33	12.08	12.28	13.04	14.31
	6H	12.21	12.90	13.18	13.87	15.15	11.72	12.41	12.69	13.38	14.66
	8H	12.31	12.97	13.29	13.96	15.23	11.82	12.48	12.80	13.47	14.74
	12H	12.36	12.99	13.34	13.97	15.27	11.86	12.49	12.84	13.47	14.77
4H	2H	10.03	10.79	11.00	11.75	13.01	9.68	10.43	10.64	11.40	12.66
	3H	11.89	12.52	12.87	13.51	14.79	11.49	12.12	12.46	13.11	14.39
	4H	12.60	13.18	13.59	14.16	15.47	12.19	12.76	13.17	13.75	15.05
	6H	13.11	13.61	14.11	14.62	15.92	12.69	13.19	13.69	14.20	15.50
	8H	13.26	13.72	14.26	14.73	16.04	12.83	13.30	13.83	14.30	15.61
	12H	13.33	13.75	14.35	14.77	16.09	12.90	13.31	13.91	14.33	15.65
8H	4H	12.80	13.26	13.79	14.26	15.58	12.43	12.89	13.42	13.89	15.21
	6H	13.42	13.81	14.44	14.85	16.16	13.05	13.43	14.07	14.48	15.79
	8H	13.64	13.98	14.67	15.01	16.34	13.26	13.59	14.29	14.63	15.96
	12H	13.77	14.07	14.80	15.09	16.47	13.37	13.67	14.40	14.69	16.07
12H	4H	12.78	13.20	13.80	14.22	15.54	12.42	12.84	13.44	13.86	15.18
	6H	13.45	13.79	14.48	14.82	16.15	13.09	13.43	14.12	14.46	15.79
	8H	13.69	13.99	14.72	15.01	16.39	13.32	13.62	14.35	14.64	16.02