

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905715

Luminaire Tested: DFN2DIP-PN3F0-040D050US835-RLLONL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P905715  
REPORT IS A COMBINATION OF REPORTS P901062 AND P897955  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN3F0-040D050US835-RLONL  
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8350.0 lumens  
Efficiency: N/A  
Efficacy: 115.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 72.4  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9972  
Total Harmonic Distortion (THDi): 0.128  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P905715  
CATALOG NUMBER: DFN2DIP-PN3F0-040D050US835-RLLONL

### Luminous Intensity Polar Plot

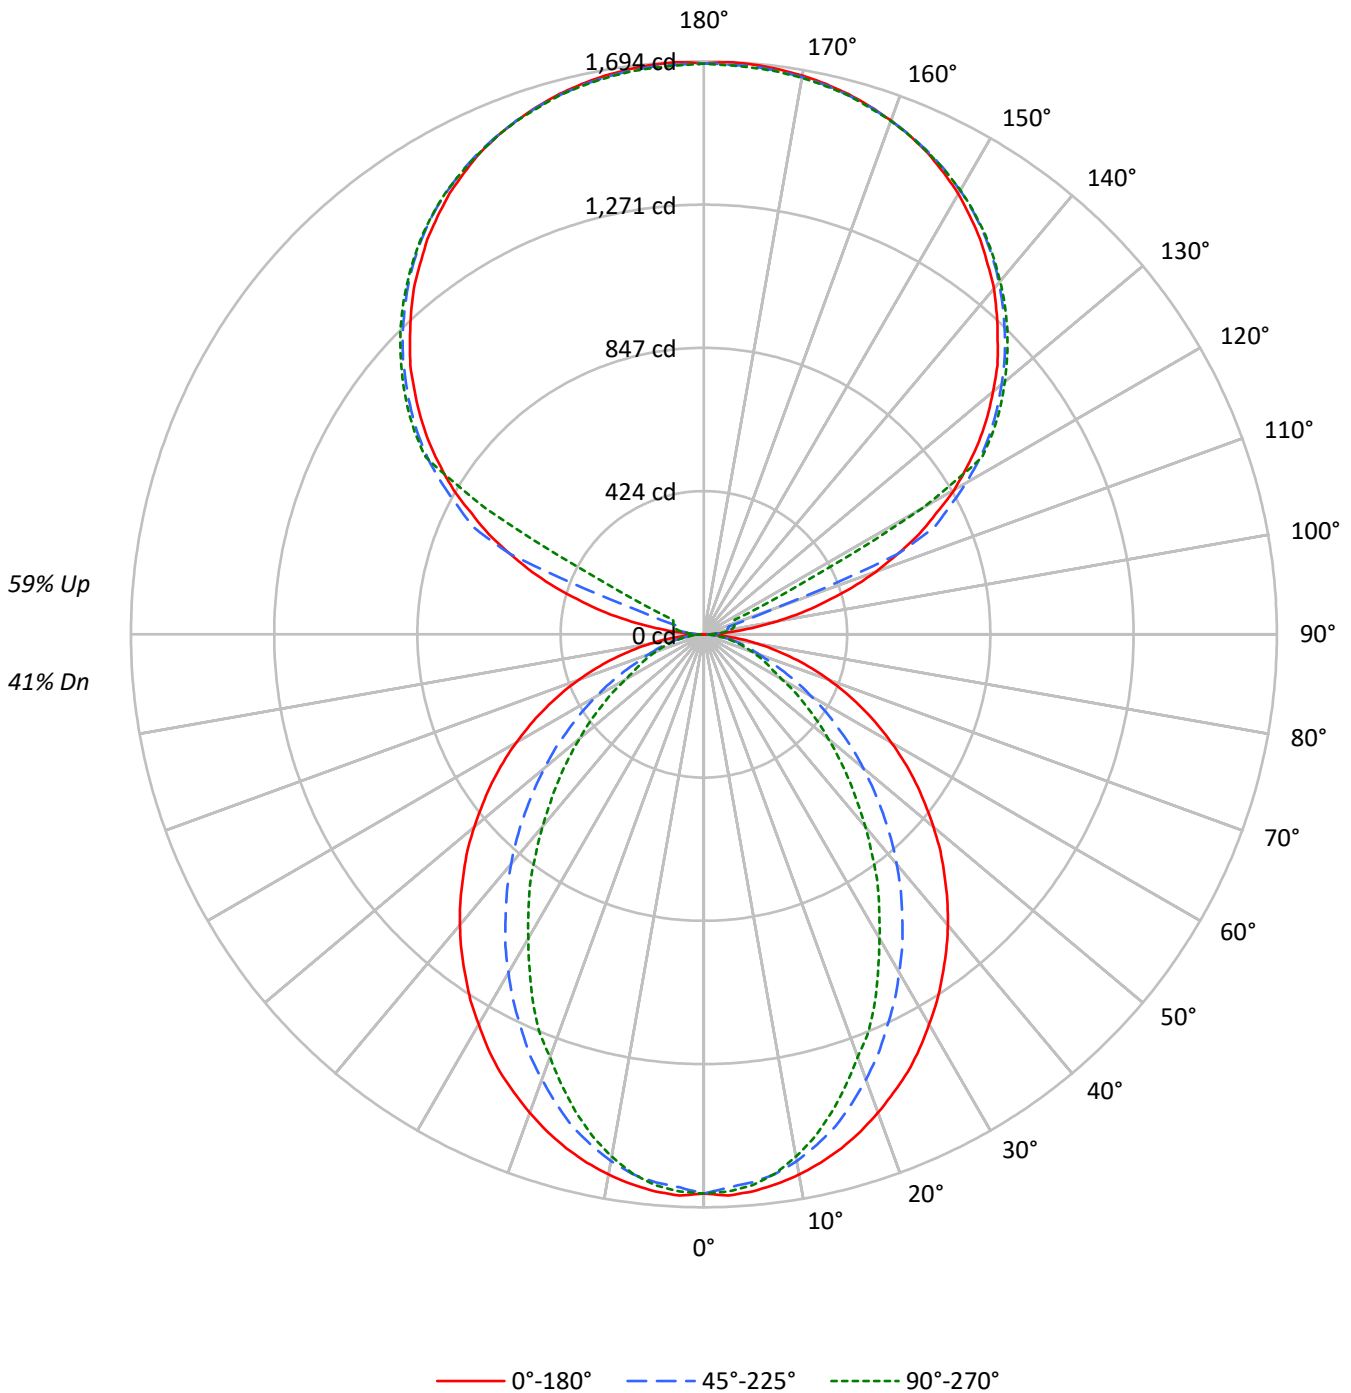



TEST NUMBER: P905715  
 CATALOG NUMBER: DFN2DIP-PN3F0-040D050US835-RLLONL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	48	48	48	41
1	96	92	88	85	87	84	81	78	69	67	65	55	54	53	43	42	41	41	41	41	35
2	88	81	75	70	80	74	69	65	61	57	54	49	47	44	38	36	35	35	35	35	30
3	80	71	64	59	73	65	59	54	54	50	46	44	41	38	34	32	30	30	30	30	26
4	74	63	56	50	67	58	52	46	48	43	40	39	36	33	31	28	26	26	26	26	23
5	68	57	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23	23	23	23	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	21	21	21	21	18
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	23	21	19	19	19	19	16
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	21	19	17	17	17	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	15	15	15	13
10	47	35	28	23	43	32	26	22	28	23	19	23	19	17	18	16	14	14	14	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1933	1933	1933
5°	1935	1901	1913
10°	1914	1862	1850
15°	1887	1799	1753
20°	1851	1713	1634
25°	1814	1617	1520
30°	1765	1518	1375
35°	1717	1412	1247
40°	1667	1303	1101
45°	1610	1182	969
50°	1551	1059	840
55°	1490	929	716
60°	1418	793	588
65°	1336	655	528
70°	1236	526	477
75°	1110	461	432
80°	928	382	372
85°	631	248	275

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1610 cd/sqm



TEST NUMBER: P905715

CATALOG NUMBER: DFN2DIP-PN3F0-040D050US835-RLLONL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	154.9	1.9
10°-20°	425.3	5.1
20°-30°	597.2	7.2
30°-40°	650.9	7.8
40°-50°	598.3	7.2
50°-60°	469.9	5.6
60°-70°	305.8	3.7
70°-80°	157.4	1.9
80°-90°	43.2	0.5
90°-100°	55.7	0.7
100°-110°	207.4	2.5
110°-120°	550.1	6.6
120°-130°	912.4	10.9
130°-140°	969.2	11.6
140°-150°	900.8	10.8
150°-160°	724.2	8.7
160°-170°	466.6	5.6
170°-180°	160.6	1.9
0°-30°	1177.4	14.1
0°-40°	1828.4	21.9
0°-60°	2896.5	34.7
0°-90°	3403.0	40.8
90°-120°	813.2	9.7
90°-150°	3595.6	43.1
90°-180°	4947.0	59.2
0°-180°	8350.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1653	1653	1653	1653	1653	
5°	1653	1646	1626	1640	1635	157
15°	1572	1556	1505	1477	1462	443
25°	1427	1379	1281	1219	1197	656
35°	1230	1154	1022	928	895	770
45°	1005	905	748	642	606	776
55°	764	648	486	396	368	683
65°	516	395	260	210	205	512
75°	275	170	120	109	108	291
85°	64	33	28	28	28	74
90°	1	15	24	31	33	8
95°	79	39	48	54	52	94
105°	371	408	74	88	93	397
115°	702	723	753	188	100	691
125°	993	1009	1032	1040	1044	885
135°	1228	1248	1259	1271	1269	949
145°	1425	1424	1444	1453	1447	891
155°	1569	1558	1573	1580	1570	723
165°	1653	1646	1650	1658	1650	467
175°	1691	1682	1685	1694	1681	161
180°	1687	1687	1687	1687	1687	



TEST NUMBER: P905715

CATALOG NUMBER: DFN2DIP-PN3F0-040D050US835-RLLONL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1653.2	1653.2	1653.2	1653.2	1653.2
2.5°	1660.7	1653.2	1636.7	1651.8	1648.7
5°	1653.2	1645.7	1626.2	1639.7	1635.3
7.5°	1639.7	1630.8	1609.9	1615.7	1608.3
10°	1621.8	1611.3	1581.4	1576.8	1568.0
12.5°	1599.4	1585.9	1545.4	1536.5	1520.0
15°	1572.4	1555.9	1505.1	1476.7	1461.8
17.5°	1541.0	1517.0	1454.1	1421.3	1397.3
20°	1505.1	1475.1	1400.3	1363.0	1330.0
22.5°	1466.2	1431.8	1344.9	1294.1	1271.8
25°	1427.3	1379.4	1280.6	1219.4	1196.8
27.5°	1381.0	1330.0	1220.8	1150.5	1116.0
30°	1331.6	1274.6	1154.9	1078.7	1038.3
32.5°	1283.7	1214.8	1092.2	1002.4	964.9
35°	1229.9	1153.5	1021.9	927.6	894.6
37.5°	1177.5	1095.1	956.0	852.7	815.4
40°	1122.1	1032.4	887.2	781.0	742.1
42.5°	1065.2	969.5	818.4	707.6	670.3
45°	1005.4	905.1	748.1	641.8	605.9
47.5°	948.6	842.4	680.8	574.5	541.6
50°	885.7	779.5	614.9	511.6	480.3
52.5°	824.3	712.1	552.1	453.3	424.9
55°	764.5	647.8	486.2	396.5	368.1
57.5°	703.2	583.5	427.9	344.1	320.2
60°	640.3	520.6	366.5	290.3	266.4
62.5°	579.1	459.4	314.1	242.4	230.5
65°	516.2	394.9	260.3	209.5	204.9
67.5°	456.4	335.1	209.5	184.0	179.5
70°	393.5	276.8	173.5	158.6	152.5
72.5°	333.7	222.9	145.1	133.2	130.2
75°	275.2	170.5	119.7	109.2	107.8
77.5°	217.0	121.1	94.3	88.3	85.2
80°	163.0	86.8	71.7	65.9	65.9
82.5°	113.7	58.4	49.4	46.3	46.3
85°	64.3	32.9	28.4	28.4	28.4
87.5°	24.0	11.9	11.9	10.5	10.5
90°	1.2	14.6	24.4	30.6	32.9
92.5°	30.6	25.7	29.3	31.8	32.9
95°	79.3	39.0	47.6	53.8	52.5
97.5°	142.8	42.8	62.2	66.0	67.1
100°	216.2	48.9	69.6	79.3	81.8
102.5°	296.7	294.3	72.1	85.4	89.2
105°	371.2	407.9	74.5	87.9	92.8
107.5°	457.9	488.3	77.0	90.3	95.3
110°	541.0	566.5	213.7	91.6	96.4



TEST NUMBER: P905715

CATALOG NUMBER: DFN2DIP-PN3F0-040D050US835-RLONL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	619.1	641.0	620.3	94.0	97.7
115°	702.1	722.8	753.4	188.1	100.2
117.5°	774.1	798.5	819.4	644.6	324.8
120°	854.7	873.0	895.0	909.7	744.8
122.5°	923.0	942.6	967.1	974.4	975.7
125°	992.6	1008.6	1031.8	1040.3	1044.0
127.5°	1056.1	1073.2	1091.7	1103.8	1105.0
130°	1116.0	1135.6	1148.9	1162.4	1161.3
132.5°	1177.1	1193.0	1206.3	1217.4	1216.2
135°	1228.4	1248.0	1258.8	1271.2	1268.7
137.5°	1282.0	1296.7	1309.0	1321.2	1317.6
140°	1334.5	1344.4	1357.7	1368.7	1362.7
142.5°	1378.6	1387.2	1403.0	1412.7	1406.6
145°	1425.0	1423.7	1444.4	1453.0	1446.9
147.5°	1465.2	1461.5	1482.3	1488.4	1483.6
150°	1504.3	1495.8	1515.3	1522.6	1516.5
152.5°	1537.2	1527.5	1545.8	1553.2	1544.6
155°	1569.0	1558.1	1572.7	1580.0	1570.3
157.5°	1594.6	1584.9	1595.9	1604.5	1594.6
160°	1616.7	1609.3	1616.7	1623.9	1615.4
162.5°	1636.1	1628.9	1634.9	1643.5	1632.5
165°	1653.2	1646.0	1649.6	1658.1	1649.6
167.5°	1666.7	1659.3	1663.1	1671.6	1660.6
170°	1677.7	1670.3	1672.8	1681.3	1670.3
172.5°	1685.0	1677.7	1680.2	1688.7	1677.7
175°	1691.1	1682.5	1685.0	1693.5	1681.3
177.5°	1693.5	1685.0	1686.3	1694.8	1683.8
180°	1687.4	1687.4	1687.4	1687.4	1687.4



TEST NUMBER: P905715  
 CATALOG NUMBER: DFN2DIP-PN3F0-040D050US835-RLONL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.47	9.23	9.51	10.27	11.67	4.43	5.19	5.47	6.23	7.63
	3H	10.13	10.81	11.18	11.86	13.28	5.61	6.29	6.66	7.34	8.76
	4H	10.74	11.38	11.80	12.43	13.86	6.05	6.70	7.12	7.75	9.18
	6H	11.15	11.74	12.22	12.80	14.23	6.37	6.96	7.44	8.01	9.45
	8H	11.27	11.83	12.35	12.91	14.34	6.45	7.02	7.53	8.09	9.52
	12H	11.33	11.86	12.41	12.93	14.38	6.49	7.03	7.57	8.09	9.55
4H	2H	8.48	9.12	9.54	10.17	11.60	5.02	5.66	6.08	6.71	8.14
	3H	10.29	10.83	11.37	11.91	13.35	6.35	6.89	7.43	7.97	9.41
	4H	10.98	11.47	12.06	12.54	14.00	6.90	7.39	7.97	8.46	9.92
	6H	11.48	11.90	12.57	13.00	14.45	7.30	7.72	8.39	8.82	10.27
	8H	11.65	12.05	12.74	13.13	14.60	7.43	7.82	8.52	8.91	10.38
	12H	11.74	12.10	12.85	13.19	14.67	7.49	7.84	8.59	8.94	10.41
8H	4H	10.94	11.33	12.03	12.42	13.89	7.17	7.56	8.25	8.64	10.11
	6H	11.49	11.82	12.61	12.95	14.41	7.67	8.00	8.78	9.13	10.59
	8H	11.71	11.99	12.82	13.10	14.59	7.86	8.14	8.98	9.25	10.74
	12H	11.84	12.09	12.96	13.19	14.72	7.97	8.22	9.09	9.33	10.85
12H	4H	10.89	11.24	11.99	12.34	13.82	7.17	7.52	8.27	8.62	10.10
	6H	11.47	11.75	12.59	12.86	14.35	7.72	8.01	8.84	9.12	10.60
	8H	11.68	11.93	12.80	13.04	14.56	7.92	8.17	9.04	9.28	10.80