

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P905806

Luminaire Tested: DFN2DIP-PN3F0-070D070US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P905806
REPORT IS A COMBINATION OF REPORTS P899576 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-070D070US835-RLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 12145.0 lumens
Efficiency: N/A
Efficacy: 98.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 123.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.946
Total Harmonic Distortion (THDi): 0.132
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P905806
CATALOG NUMBER: DFN2DIP-PN3F0-070D070US835-RLFL

Luminous Intensity Polar Plot

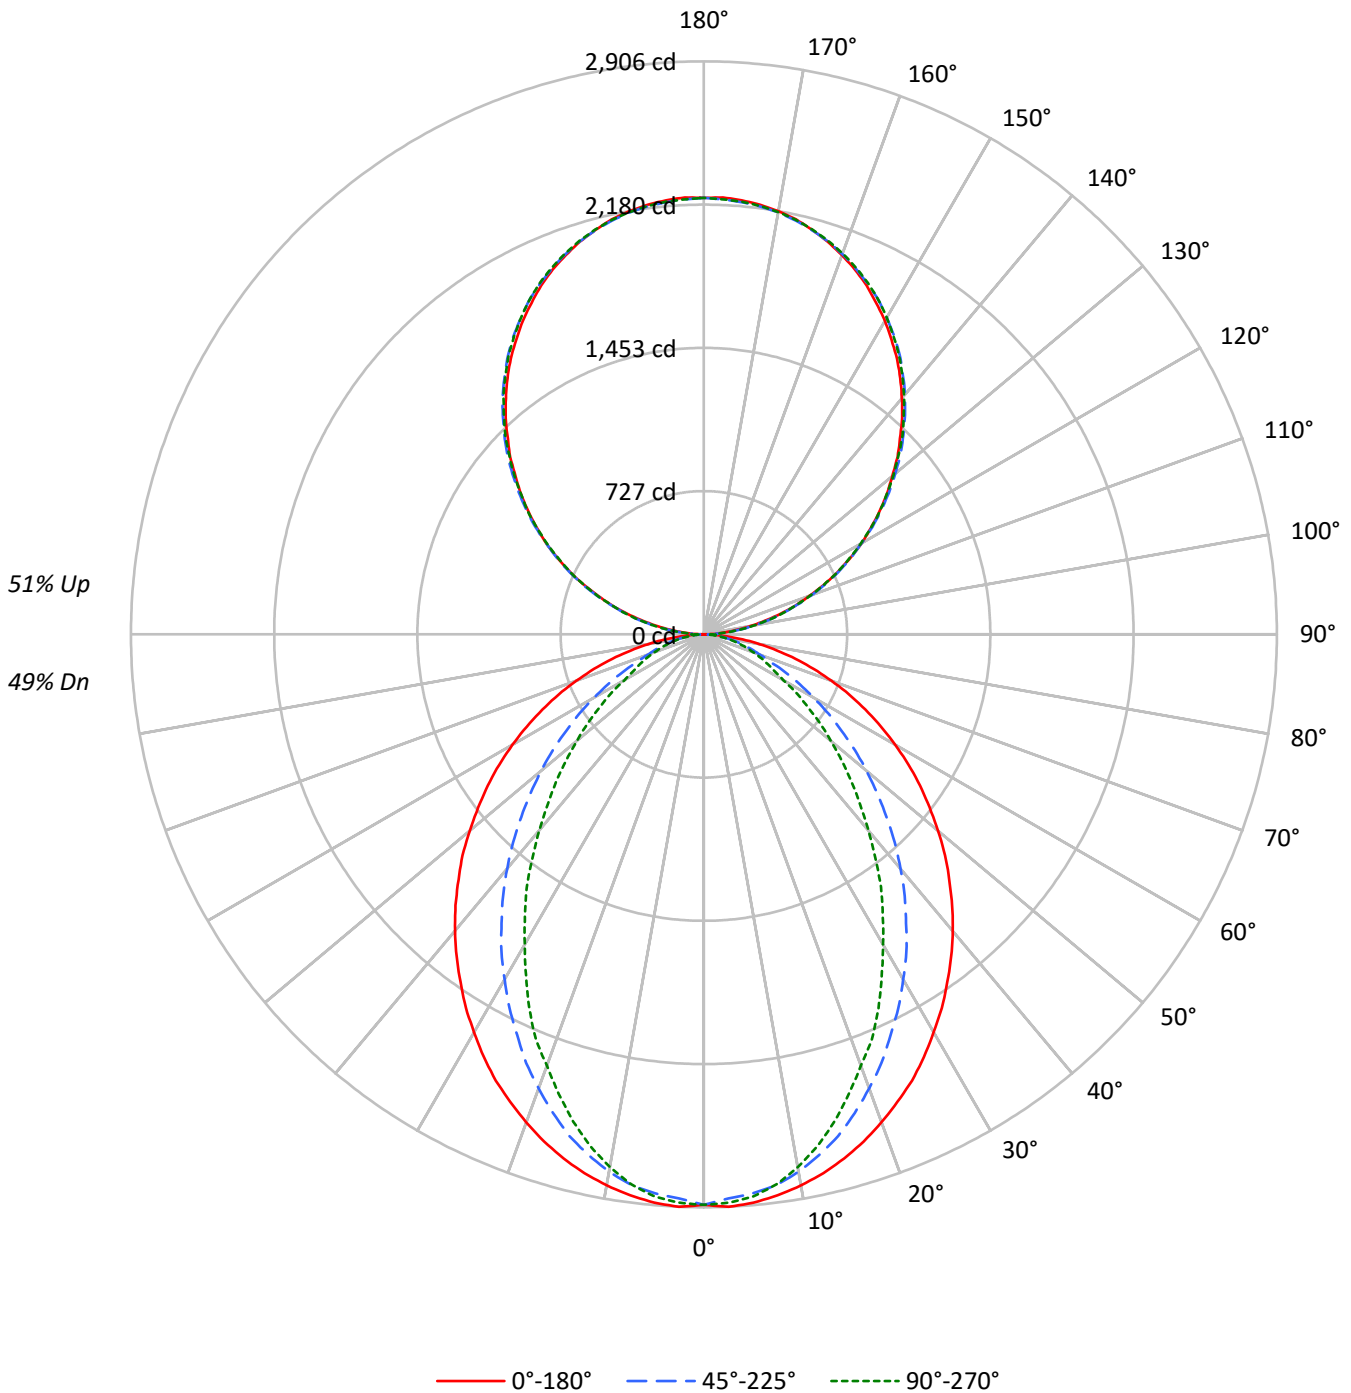



TEST NUMBER: P905806
 CATALOG NUMBER: DFN2DIP-PN3F0-070D070US835-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55	49			49
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48	42			42
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41	36			36
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35	31			31
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31	27			27
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27	24			24
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24	21			21
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22	19			19
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20	17			17
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18	16			16
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16	14			14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3382	3382	3382
5°	3385	3326	3348
10°	3350	3258	3238
15°	3302	3148	3068
20°	3239	2998	2860
25°	3174	2829	2660
30°	3088	2657	2406
35°	3004	2471	2183
40°	2918	2280	1927
45°	2818	2068	1696
50°	2715	1854	1470
55°	2607	1626	1252
60°	2482	1388	1029
65°	2337	1146	925
70°	2163	920	835
75°	1943	806	756
80°	1625	669	651
85°	1104	435	481

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2818 cd/sqm



TEST NUMBER: P905806

CATALOG NUMBER: DFN2DIP-PN3F0-070D070US835-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	271.1	2.2
10°-20°	744.3	6.1
20°-30°	1045.0	8.6
30°-40°	1139.2	9.4
40°-50°	1047.0	8.6
50°-60°	822.3	6.8
60°-70°	535.2	4.4
70°-80°	275.5	2.3
80°-90°	76.6	0.6
90°-100°	137.0	1.1
100°-110°	435.3	3.6
110°-120°	744.9	6.1
120°-130°	979.6	8.1
130°-140°	1099.6	9.1
140°-150°	1078.3	8.9
150°-160°	904.5	7.4
160°-170°	599.9	4.9
170°-180°	209.7	1.7
0°-30°	2060.5	17.0
0°-40°	3199.7	26.3
0°-60°	5068.9	41.7
0°-90°	5956.3	49.0
90°-120°	1317.2	10.8
90°-150°	4474.7	36.8
90°-180°	6189.0	51.0
0°-180°	12145.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2893	2893	2893	2893	2893	
5°	2893	2880	2846	2870	2862	274
15°	2752	2723	2634	2584	2558	775
25°	2498	2414	2241	2134	2094	1149
35°	2152	2019	1788	1623	1566	1347
45°	1760	1584	1309	1123	1060	1359
55°	1338	1134	851	694	644	1195
65°	903	691	456	367	359	896
75°	482	298	209	191	189	509
85°	112	58	50	50	50	129
90°	2	24	65	61	63	12
95°	97	116	120	120	116	108
105°	402	407	411	414	414	424
115°	748	758	755	753	748	739
125°	1087	1104	1099	1093	1091	972
135°	1406	1427	1431	1429	1424	1087
145°	1707	1721	1731	1733	1726	1067
155°	1952	1958	1964	1973	1967	899
165°	2124	2122	2122	2135	2126	599
175°	2210	2204	2200	2214	2202	210
180°	2214	2214	2214	2214	2214	



TEST NUMBER: P905806

CATALOG NUMBER: DFN2DIP-PN3F0-070D070US835-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2893.1	2893.1	2893.1	2893.1	2893.1
2.5°	2906.1	2893.1	2864.2	2890.6	2885.3
5°	2893.1	2880.0	2845.9	2869.5	2861.7
7.5°	2869.5	2853.9	2817.3	2827.5	2814.5
10°	2838.1	2819.8	2767.5	2759.5	2743.9
12.5°	2798.9	2775.3	2704.5	2688.9	2660.0
15°	2751.7	2722.8	2633.9	2584.2	2558.1
17.5°	2696.7	2654.8	2544.8	2487.2	2445.3
20°	2633.9	2581.4	2450.6	2385.3	2327.5
22.5°	2565.9	2505.6	2353.6	2264.7	2225.6
25°	2497.8	2413.9	2241.1	2133.9	2094.5
27.5°	2416.7	2327.5	2136.4	2013.4	1953.1
30°	2330.3	2230.6	2021.1	1887.8	1817.0
32.5°	2246.4	2125.9	1911.4	1754.2	1688.6
35°	2152.2	2018.6	1788.4	1623.4	1565.6
37.5°	2060.6	1916.4	1673.1	1492.2	1427.0
40°	1963.6	1806.7	1552.5	1366.7	1298.6
42.5°	1864.2	1696.7	1432.2	1238.3	1173.1
45°	1759.5	1583.9	1309.2	1123.1	1060.3
47.5°	1660.0	1474.2	1191.4	1005.3	947.8
50°	1550.0	1364.2	1076.1	895.3	840.6
52.5°	1442.5	1246.1	966.1	793.3	743.6
55°	1337.8	1133.6	850.8	693.9	644.2
57.5°	1230.6	1021.1	748.9	602.2	560.3
60°	1120.6	911.1	641.4	508.1	466.1
62.5°	1013.3	803.9	549.7	424.2	403.3
65°	903.3	691.1	455.6	366.7	358.6
67.5°	798.6	586.4	366.7	321.9	314.2
70°	688.6	484.4	303.6	277.5	266.9
72.5°	583.9	390.0	253.9	233.1	227.8
75°	481.7	298.3	209.4	191.1	188.6
77.5°	379.7	211.9	165.0	154.4	149.2
80°	285.3	151.9	125.6	115.3	115.3
82.5°	198.9	102.2	86.4	81.1	81.1
85°	112.5	57.5	49.7	49.7	49.7
87.5°	41.9	20.8	20.8	18.3	18.3
90°	2.0	24.0	65.4	61.4	63.4
92.5°	41.4	56.1	58.1	60.1	60.1
95°	97.4	116.1	119.5	119.5	116.1
97.5°	162.2	179.5	186.9	186.9	186.9
100°	236.9	252.3	257.6	257.6	255.6
102.5°	315.7	327.0	334.4	336.4	334.4
105°	401.8	407.1	411.1	414.5	414.5
107.5°	487.2	495.2	495.2	496.6	487.2
110°	570.0	580.7	580.7	580.7	575.3



TEST NUMBER: P905806

CATALOG NUMBER: DFN2DIP-PN3F0-070D070US835-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	659.4	670.8	668.8	663.4	659.4
115°	747.5	758.2	754.9	752.9	747.5
117.5°	834.9	849.6	840.3	834.9	829.6
120°	923.0	937.7	923.0	923.0	917.0
122.5°	1003.1	1021.8	1012.5	1007.1	1003.1
125°	1087.2	1103.9	1098.6	1092.6	1090.6
127.5°	1169.3	1190.0	1182.7	1174.7	1169.3
130°	1246.1	1270.1	1266.8	1262.8	1255.4
132.5°	1332.2	1350.9	1352.2	1342.9	1337.5
135°	1406.3	1426.9	1431.0	1428.9	1423.6
137.5°	1489.0	1505.7	1509.0	1507.7	1499.7
140°	1561.8	1578.5	1587.8	1587.8	1580.5
142.5°	1636.5	1653.2	1658.5	1660.5	1653.2
145°	1707.3	1720.6	1731.3	1733.3	1726.0
147.5°	1770.7	1787.4	1795.4	1798.7	1791.4
150°	1836.1	1847.4	1854.8	1860.8	1854.8
152.5°	1894.1	1905.5	1914.8	1922.2	1914.8
155°	1952.2	1957.5	1963.6	1972.9	1966.9
157.5°	2002.3	2006.3	2009.6	2023.0	2013.6
160°	2047.0	2051.0	2053.0	2064.3	2056.3
162.5°	2088.4	2088.4	2090.4	2103.0	2093.7
165°	2123.7	2121.7	2121.7	2135.1	2125.7
167.5°	2155.8	2149.8	2149.8	2163.1	2153.8
170°	2179.8	2174.5	2172.5	2185.8	2174.5
172.5°	2196.5	2191.1	2189.1	2202.5	2191.1
175°	2209.8	2204.5	2200.5	2213.8	2202.5
177.5°	2217.2	2211.8	2207.8	2219.2	2207.8
180°	2213.8	2213.8	2213.8	2213.8	2213.8



TEST NUMBER: P905806
 CATALOG NUMBER: DFN2DIP-PN3F0-070D070US835-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.25	12.07	12.22	13.05	14.34	7.22	8.04	8.19	9.02	10.31
	3H	12.92	13.66	13.90	14.65	15.96	8.40	9.13	9.38	10.12	11.43
	4H	13.52	14.22	14.52	15.21	16.53	8.84	9.54	9.84	10.53	11.85
	6H	13.94	14.58	14.95	15.58	16.91	9.16	9.80	10.17	10.80	12.13
	8H	14.06	14.67	15.08	15.69	17.02	9.25	9.85	10.26	10.87	12.20
	12H	14.12	14.70	15.14	15.71	17.06	9.29	9.87	10.30	10.87	12.22
4H	2H	11.27	11.96	12.27	12.95	14.27	7.81	8.50	8.81	9.50	10.81
	3H	13.09	13.66	14.10	14.69	16.02	9.15	9.73	10.16	10.75	12.08
	4H	13.77	14.30	14.79	15.32	16.67	9.69	10.22	10.71	11.24	12.59
	6H	14.28	14.74	15.31	15.78	17.13	10.10	10.56	11.13	11.60	12.95
	8H	14.45	14.88	15.48	15.91	17.28	10.23	10.65	11.26	11.69	13.05
	12H	14.55	14.93	15.59	15.97	17.35	10.29	10.67	11.34	11.72	13.09
8H	4H	13.74	14.16	14.77	15.19	16.56	9.97	10.39	11.00	11.42	12.79
	6H	14.30	14.65	15.35	15.72	17.09	10.48	10.83	11.53	11.90	13.26
	8H	14.51	14.82	15.57	15.88	17.26	10.66	10.97	11.73	12.03	13.41
	12H	14.64	14.92	15.71	15.97	17.39	10.78	11.05	11.84	12.10	13.53
12H	4H	13.69	14.07	14.74	15.12	16.49	9.97	10.35	11.02	11.40	12.77
	6H	14.27	14.58	15.34	15.64	17.02	10.53	10.83	11.59	11.89	13.27
	8H	14.49	14.76	15.55	15.81	17.24	10.73	11.00	11.79	12.05	13.48