

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908430

Luminaire Tested: DFN2DIP-PN3F0-030D090US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908430
REPORT IS A COMBINATION OF REPORTS P899596 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-030D090US840-RLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10618.7 lumens
Efficiency: N/A
Efficacy: 111.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 95.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908430
CATALOG NUMBER: DFN2DIP-PN3F0-030D090US840-RLLFLL

Luminous Intensity Polar Plot

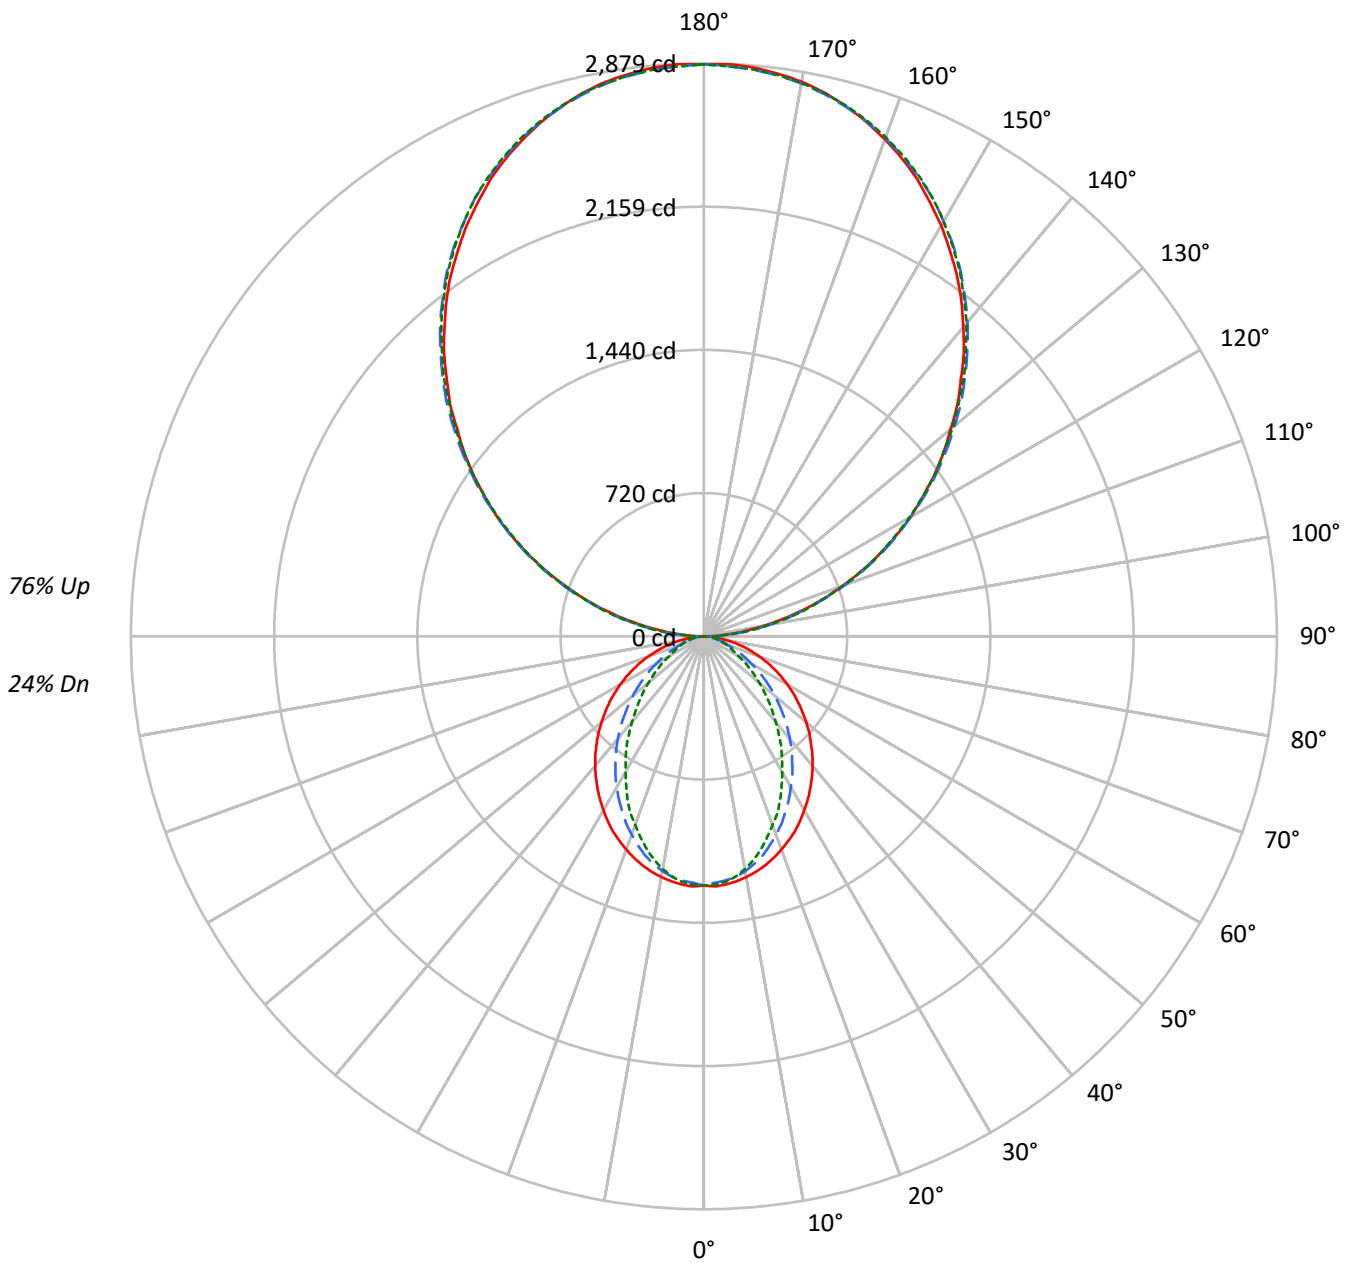

— 0°-180° - - 45°-225° - - - 90°-270°



TEST NUMBER: P908430
 CATALOG NUMBER: DFN2DIP-PN3F0-030D090US840-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33	24				24
1	92	88	85	81	82	79	76	73	61	59	57	44	43	42	29	28	28	21				21
2	84	77	71	67	75	69	64	60	53	50	47	39	37	35	26	25	24	18				18
3	77	68	61	56	68	61	55	50	47	43	40	35	32	30	23	22	20	15				15
4	70	60	53	47	62	54	48	43	42	38	34	31	28	26	21	19	18	13				13
5	64	54	46	40	57	48	42	37	38	33	29	28	25	22	19	17	16	12				12
6	59	48	40	35	53	43	37	32	34	29	26	25	22	20	17	15	14	11				11
7	55	43	36	30	49	39	32	28	31	26	23	23	20	17	16	14	12	9				9
8	51	39	32	27	45	35	29	24	28	23	20	21	18	16	14	12	11	8				8
9	47	36	29	24	42	32	26	22	25	21	18	19	16	14	13	11	10	8				8
10	44	33	26	21	39	29	23	19	23	19	16	18	15	13	12	10	9	7				7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1464	1464	1464
5°	1465	1439	1449
10°	1450	1410	1401
15°	1429	1363	1328
20°	1402	1297	1238
25°	1374	1225	1151
30°	1337	1150	1041
35°	1300	1070	945
40°	1263	987	834
45°	1220	895	734
50°	1175	802	636
55°	1128	704	542
60°	1074	601	446
65°	1012	496	400
70°	936	398	361
75°	840	349	327
80°	703	289	282
85°	478	188	208

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 2847 cd/sqm



TEST NUMBER: P908430

CATALOG NUMBER: DFN2DIP-PN3F0-030D090US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	117.4	1.1
10°-20°	322.1	3.0
20°-30°	452.3	4.3
30°-40°	493.0	4.6
40°-50°	453.1	4.3
50°-60°	355.9	3.4
60°-70°	231.6	2.2
70°-80°	119.2	1.1
80°-90°	38.6	0.4
90°-100°	177.9	1.7
100°-110°	565.2	5.3
110°-120°	967.2	9.1
120°-130°	1272.0	12.0
130°-140°	1427.7	13.4
140°-150°	1400.0	13.2
150°-160°	1174.4	11.1
160°-170°	778.9	7.3
170°-180°	272.2	2.6
0°-30°	891.8	8.4
0°-40°	1384.8	13.0
0°-60°	2193.8	20.7
0°-90°	2583.3	24.3
90°-120°	1710.2	16.1
90°-150°	5809.9	54.7
90°-180°	8035.0	75.7
0°-180°	10618.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1252	1252	1252	1252	1252	
5°	1252	1246	1232	1242	1238	119
15°	1191	1178	1140	1118	1107	336
25°	1081	1045	970	924	906	497
35°	932	874	774	703	678	583
45°	762	686	567	486	459	588
55°	579	491	368	300	279	517
65°	391	299	197	159	155	388
75°	208	129	91	83	82	220
85°	49	25	22	22	22	56
90°	3	31	85	80	82	11
95°	126	151	155	155	151	141
105°	522	529	534	538	538	551
115°	971	984	980	978	971	960
125°	1412	1433	1426	1419	1416	1261
135°	1826	1853	1858	1855	1848	1411
145°	2217	2234	2248	2250	2241	1385
155°	2535	2542	2550	2562	2554	1167
165°	2757	2755	2755	2772	2760	778
175°	2869	2862	2857	2874	2860	273
180°	2874	2874	2874	2874	2874	



TEST NUMBER: P908430

CATALOG NUMBER: DFN2DIP-PN3F0-030D090US840-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1252.1	1252.1	1252.1	1252.1	1252.1
2.5°	1257.8	1252.1	1239.6	1251.0	1248.8
5°	1252.1	1246.5	1231.7	1241.9	1238.5
7.5°	1241.9	1235.2	1219.3	1223.8	1218.1
10°	1228.3	1220.4	1197.8	1194.3	1187.6
12.5°	1211.3	1201.1	1170.5	1163.8	1151.2
15°	1190.9	1178.4	1139.9	1118.4	1107.1
17.5°	1167.1	1149.0	1101.4	1076.5	1058.3
20°	1139.9	1117.2	1060.6	1032.4	1007.3
22.5°	1110.5	1084.4	1018.7	980.2	963.2
25°	1081.1	1044.7	970.0	923.5	906.5
27.5°	1045.9	1007.3	924.6	871.4	845.3
30°	1008.6	965.4	874.7	817.1	786.4
32.5°	972.2	920.1	827.3	759.2	730.8
35°	931.5	873.6	774.0	702.6	677.6
37.5°	891.8	829.4	724.1	645.8	617.6
40°	849.9	781.9	672.0	591.5	562.1
42.5°	806.8	734.4	619.9	535.9	507.7
45°	761.5	685.5	566.6	486.0	458.9
47.5°	718.4	638.0	515.6	435.1	410.2
50°	670.9	590.4	465.7	387.5	363.8
52.5°	624.3	539.4	418.2	343.4	321.8
55°	579.0	490.6	368.2	300.3	278.8
57.5°	532.6	441.9	324.2	260.6	242.5
60°	484.9	394.4	277.6	219.8	201.8
62.5°	438.6	347.9	237.9	183.6	174.6
65°	390.9	299.1	197.1	158.6	155.2
67.5°	345.7	253.8	158.6	139.4	135.9
70°	298.0	209.6	131.4	120.1	115.5
72.5°	252.7	168.7	109.9	100.9	98.6
75°	208.4	129.2	90.7	82.7	81.6
77.5°	164.3	91.7	71.4	66.9	64.5
80°	123.5	65.7	54.3	49.9	49.9
82.5°	86.0	44.2	37.4	35.1	35.1
85°	48.7	24.8	21.5	21.5	21.5
87.5°	18.2	9.0	9.0	8.0	8.0
90°	2.6	31.2	84.9	79.7	82.3
92.5°	53.7	72.8	75.4	78.0	78.0
95°	126.5	150.8	155.1	155.1	150.8
97.5°	210.6	233.1	242.7	242.7	242.7
100°	307.6	327.6	334.5	334.5	331.9
102.5°	409.9	424.6	434.1	436.8	434.1
105°	521.7	528.6	533.8	538.2	538.2
107.5°	632.6	643.0	643.0	644.7	632.6
110°	740.0	754.0	754.0	754.0	747.0



TEST NUMBER: P908430

CATALOG NUMBER: DFN2DIP-PN3F0-030D090US840-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	856.2	870.9	868.3	861.4	856.2
115°	970.6	984.4	980.1	977.5	970.6
117.5°	1084.1	1103.2	1091.1	1084.1	1077.1
120°	1198.5	1217.5	1198.5	1198.5	1190.6
122.5°	1302.4	1326.8	1314.6	1307.7	1302.4
125°	1411.7	1433.3	1426.4	1418.6	1416.0
127.5°	1518.2	1545.1	1535.6	1525.2	1518.2
130°	1617.9	1649.1	1644.8	1639.5	1630.0
132.5°	1729.7	1753.9	1755.7	1743.5	1736.7
135°	1825.8	1852.7	1858.0	1855.3	1848.5
137.5°	1933.3	1955.0	1959.3	1957.6	1947.2
140°	2027.8	2049.4	2061.5	2061.5	2052.0
142.5°	2124.9	2146.5	2153.4	2156.1	2146.5
145°	2216.8	2234.0	2247.9	2250.5	2241.0
147.5°	2299.1	2320.7	2331.1	2335.4	2325.9
150°	2384.0	2398.7	2408.2	2416.0	2408.2
152.5°	2459.3	2474.1	2486.2	2495.8	2486.2
155°	2534.8	2541.6	2549.5	2561.6	2553.8
157.5°	2599.7	2604.9	2609.3	2626.6	2614.4
160°	2657.8	2663.0	2665.6	2680.3	2669.9
162.5°	2711.5	2711.5	2714.1	2730.6	2718.5
165°	2757.4	2754.8	2754.8	2772.2	2760.1
167.5°	2799.0	2791.3	2791.3	2808.5	2796.4
170°	2830.2	2823.3	2820.8	2838.0	2823.3
172.5°	2851.9	2845.0	2842.4	2859.7	2845.0
175°	2869.2	2862.3	2857.1	2874.5	2859.7
177.5°	2878.7	2871.9	2866.6	2881.3	2866.6
180°	2874.5	2874.5	2874.5	2874.5	2874.5



TEST NUMBER: P908430
 CATALOG NUMBER: DFN2DIP-PN3F0-030D090US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	5.35	6.00	6.50	7.14	8.74	1.31	1.97	2.47	3.11	4.71
	3H	7.00	7.59	8.17	8.74	10.35	2.48	3.07	3.64	4.22	5.83
	4H	7.60	8.16	8.77	9.31	10.92	2.92	3.48	4.09	4.62	6.24
	6H	8.01	8.52	9.19	9.67	11.30	3.23	3.74	4.40	4.89	6.52
	8H	8.13	8.62	9.31	9.78	11.40	3.31	3.80	4.49	4.96	6.58
	12H	8.18	8.64	9.36	9.80	11.44	3.34	3.81	4.53	4.96	6.61
4H	2H	5.34	5.90	6.52	7.05	8.66	1.88	2.44	3.06	3.59	5.20
	3H	7.15	7.61	8.33	8.78	10.41	3.21	3.67	4.39	4.85	6.48
	4H	7.83	8.26	9.01	9.42	11.06	3.75	4.17	4.93	5.33	6.98
	6H	8.33	8.69	9.52	9.88	11.51	4.15	4.51	5.34	5.70	7.34
	8H	8.50	8.84	9.68	10.01	11.67	4.27	4.61	5.46	5.79	7.44
	12H	8.58	8.89	9.78	10.07	11.73	4.32	4.63	5.53	5.82	7.48
8H	4H	7.78	8.12	8.97	9.30	10.95	4.01	4.35	5.20	5.53	7.18
	6H	8.33	8.62	9.54	9.83	11.48	4.51	4.79	5.72	6.01	7.66
	8H	8.55	8.79	9.76	9.98	11.66	4.70	4.94	5.91	6.14	7.81
	12H	8.67	8.89	9.89	10.08	11.78	4.81	5.02	6.02	6.21	7.91
12H	4H	7.73	8.04	8.93	9.22	10.88	4.01	4.32	5.21	5.50	7.16
	6H	8.31	8.55	9.52	9.75	11.42	4.56	4.81	5.77	6.00	7.67
	8H	8.52	8.73	9.73	9.92	11.63	4.76	4.97	5.97	6.16	7.87