

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908440

Luminaire Tested: DFN2DIP-PN3F0-040D050US840-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P908440  
REPORT IS A COMBINATION OF REPORTS P899541 AND P896399  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN3F0-040D050US840-FLLFLL  
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8467.7 lumens  
Efficiency: N/A  
Efficacy: 117.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 72.4  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9972  
Total Harmonic Distortion (THDi): 0.128  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P908440  
CATALOG NUMBER: DFN2DIP-PN3F0-040D050US840-FLLFLL

### Luminous Intensity Polar Plot

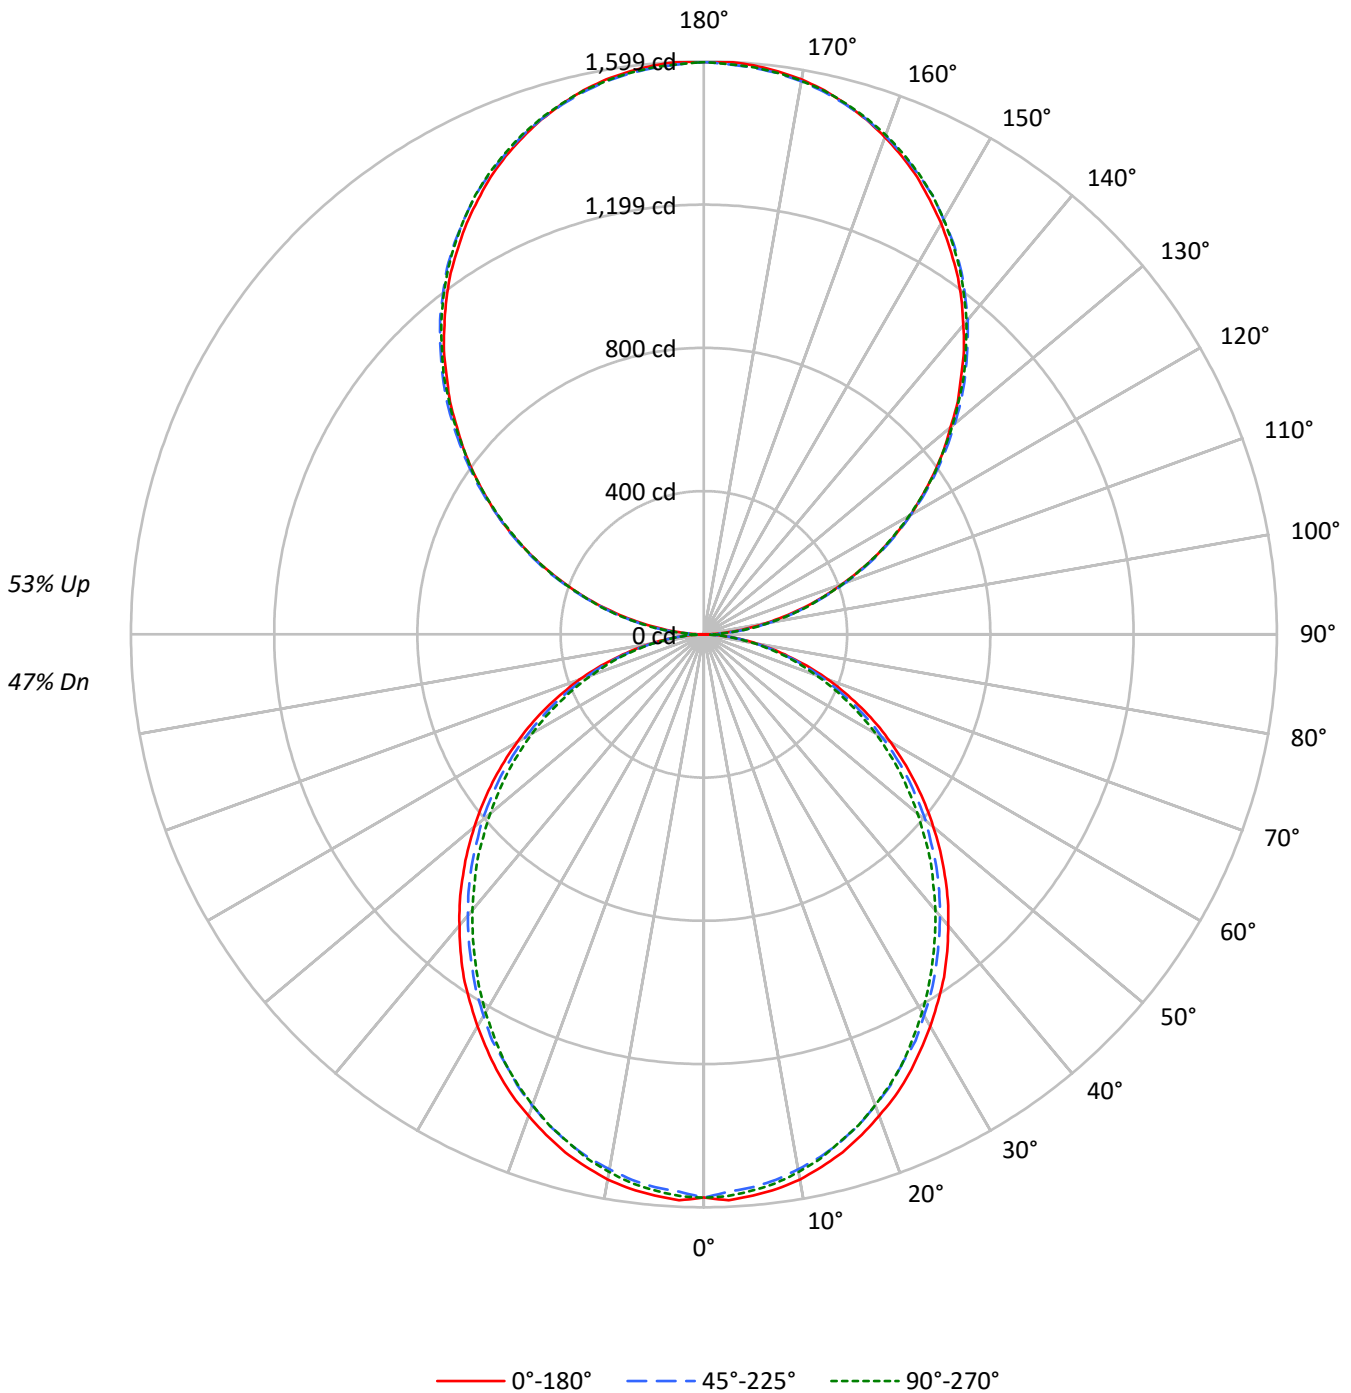



TEST NUMBER: P908440  
 CATALOG NUMBER: DFN2DIP-PN3F0-040D050US840-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	54	54	54	47	47	47	47
1	97	93	89	85	89	85	82	79	72	69	67	59	57	56	47	46	45	40	40	40	40
2	88	81	75	70	81	75	69	65	63	59	56	52	49	47	42	40	38	33	33	33	33
3	81	71	64	58	74	66	59	54	55	51	47	46	42	39	37	35	32	28	28	28	28
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28	24	24	24	24
5	68	56	48	42	62	52	45	39	44	39	34	37	33	29	30	27	24	21	21	21	21
6	62	50	42	37	57	47	40	34	40	34	30	33	29	26	27	24	21	19	19	19	19
7	58	45	38	32	53	42	35	30	36	30	26	30	26	23	25	21	19	16	16	16	16
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	19	17	15	15	15	15
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15	13	13	13	13
10	47	35	27	23	43	32	26	21	28	22	19	23	19	16	19	16	14	12	12	12	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1837	1837	1837
5°	1839	1810	1823
10°	1823	1785	1798
15°	1795	1754	1758
20°	1758	1712	1718
25°	1721	1662	1672
30°	1674	1615	1613
35°	1631	1560	1551
40°	1577	1505	1491
45°	1523	1449	1431
50°	1464	1391	1361
55°	1402	1323	1296
60°	1332	1243	1222
65°	1256	1159	1135
70°	1158	1058	1040
75°	1024	936	952
80°	861	780	786
85°	607	516	512

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 1581 cd/sqm



TEST NUMBER: P908440

CATALOG NUMBER: DFN2DIP-PN3F0-040D050US840-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	147.9	1.7
10°-20°	416.2	4.9
20°-30°	611.7	7.2
30°-40°	710.5	8.4
40°-50°	709.6	8.4
50°-60°	618.7	7.3
60°-70°	457.4	5.4
70°-80°	258.8	3.1
80°-90°	72.8	0.9
90°-100°	98.8	1.2
100°-110°	314.0	3.7
110°-120°	537.3	6.3
120°-130°	706.6	8.3
130°-140°	793.2	9.4
140°-150°	777.8	9.2
150°-160°	652.5	7.7
160°-170°	432.7	5.1
170°-180°	151.2	1.8
0°-30°	1175.9	13.9
0°-40°	1886.3	22.3
0°-60°	3214.6	38.0
0°-90°	4003.6	47.3
90°-120°	950.1	11.2
90°-150°	3227.7	38.1
90°-180°	4464.0	52.7
0°-180°	8467.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1572	1572	1572	1572	1572	
5°	1572	1566	1549	1561	1558	149
15°	1496	1487	1468	1474	1466	421
25°	1354	1342	1316	1319	1316	623
35°	1168	1153	1129	1120	1112	730
45°	951	940	917	901	895	734
55°	720	710	692	674	667	643
65°	485	476	461	447	440	480
75°	254	251	243	234	237	271
85°	62	60	59	54	53	69
90°	1	17	47	44	46	8
95°	70	84	86	86	84	78
105°	290	294	297	299	299	306
115°	539	547	544	543	539	533
125°	784	796	792	788	787	701
135°	1014	1029	1032	1031	1027	784
145°	1232	1241	1249	1250	1245	769
155°	1408	1412	1416	1423	1419	648
165°	1532	1530	1530	1540	1533	432
175°	1594	1590	1587	1597	1589	151
180°	1597	1597	1597	1597	1597	



TEST NUMBER: P908440

CATALOG NUMBER: DFN2DIP-PN3F0-040D050US840-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1571.8	1571.8	1571.8	1571.8	1571.8
2.5°	1580.9	1573.4	1556.7	1571.8	1568.9
5°	1571.8	1565.8	1549.1	1561.2	1558.3
7.5°	1561.2	1552.2	1535.5	1547.7	1544.7
10°	1544.7	1534.1	1516.0	1528.0	1523.5
12.5°	1521.9	1512.9	1494.8	1502.4	1499.2
15°	1496.2	1487.2	1467.5	1473.6	1466.1
17.5°	1464.5	1455.5	1435.8	1443.3	1435.8
20°	1429.7	1420.7	1399.6	1404.0	1398.2
22.5°	1395.0	1381.4	1361.7	1361.7	1358.7
25°	1354.1	1342.1	1316.5	1319.4	1316.5
27.5°	1308.8	1298.2	1278.7	1274.1	1266.7
30°	1263.5	1251.4	1228.8	1224.3	1218.2
32.5°	1215.2	1206.2	1181.9	1172.9	1166.7
35°	1168.3	1153.3	1129.0	1119.9	1112.4
37.5°	1115.4	1101.8	1077.5	1067.0	1059.4
40°	1061.1	1048.8	1024.6	1011.2	1005.1
42.5°	1008.1	995.9	971.9	956.6	947.7
45°	950.7	940.2	917.4	900.9	894.7
47.5°	894.7	884.1	860.0	843.3	834.4
50°	835.8	828.2	807.1	785.9	778.3
52.5°	778.3	767.8	748.2	731.5	720.9
55°	719.5	710.3	692.3	674.1	666.6
57.5°	660.5	653.0	633.2	615.1	609.0
60°	601.5	595.5	574.4	557.7	553.2
62.5°	544.1	533.5	518.5	503.3	497.3
65°	485.2	476.1	461.0	447.4	439.9
67.5°	424.7	417.1	403.6	393.0	387.0
70°	368.8	362.7	349.1	338.5	332.5
72.5°	311.4	305.3	297.8	287.2	282.7
75°	253.9	251.0	243.3	234.3	237.3
77.5°	202.5	196.4	193.4	188.8	184.4
80°	151.2	149.6	146.5	142.1	139.1
82.5°	102.8	102.8	101.4	95.2	95.2
85°	61.9	60.5	59.0	54.3	52.9
87.5°	27.3	24.2	21.2	16.7	15.0
90°	1.4	17.4	47.2	44.3	45.7
92.5°	29.9	40.4	41.9	43.3	43.3
95°	70.3	83.8	86.1	86.1	83.8
97.5°	116.9	129.5	134.8	134.8	134.8
100°	170.9	182.0	185.8	185.8	184.4
102.5°	227.7	235.9	241.2	242.7	241.2
105°	289.8	293.7	296.6	298.9	298.9
107.5°	351.4	357.2	357.2	358.2	351.4
110°	411.1	418.9	418.9	418.9	415.0



TEST NUMBER: P908440

CATALOG NUMBER: DFN2DIP-PN3F0-040D050US840-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	475.6	483.8	482.4	478.6	475.6
115°	539.2	546.9	544.5	543.1	539.2
117.5°	602.3	612.9	606.1	602.3	598.4
120°	665.8	676.4	665.8	665.8	661.5
122.5°	723.6	737.1	730.3	726.5	723.6
125°	784.3	796.3	792.4	788.1	786.7
127.5°	843.4	858.4	853.1	847.3	843.4
130°	898.9	916.2	913.7	910.9	905.5
132.5°	961.0	974.4	975.4	968.7	964.8
135°	1014.4	1029.3	1032.2	1030.8	1026.9
137.5°	1074.1	1086.1	1088.5	1087.5	1081.8
140°	1126.5	1138.6	1145.3	1145.3	1140.0
142.5°	1180.4	1192.6	1196.4	1197.8	1192.6
145°	1231.5	1241.1	1248.8	1250.3	1245.0
147.5°	1277.3	1289.3	1295.1	1297.5	1292.1
150°	1324.4	1332.6	1337.9	1342.2	1337.9
152.5°	1366.3	1374.5	1381.2	1386.5	1381.2
155°	1408.2	1412.0	1416.3	1423.1	1418.8
157.5°	1444.3	1447.1	1449.6	1459.3	1452.5
160°	1476.5	1479.5	1480.9	1489.0	1483.3
162.5°	1506.4	1506.4	1507.8	1517.0	1510.3
165°	1532.0	1530.5	1530.5	1540.1	1533.4
167.5°	1555.0	1550.6	1550.6	1560.3	1553.6
170°	1572.4	1568.5	1567.1	1576.7	1568.5
172.5°	1584.4	1580.5	1579.1	1588.7	1580.5
175°	1594.1	1590.1	1587.3	1596.9	1588.7
177.5°	1599.3	1595.5	1592.6	1600.7	1592.6
180°	1596.9	1596.9	1596.9	1596.9	1596.9



TEST NUMBER: P908440  
 CATALOG NUMBER: DFN2DIP-PN3F0-040D050US840-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.09	9.93	10.07	10.92	12.23	8.65	9.49	9.63	10.48	11.79
	3H	10.74	11.49	11.73	12.49	13.82	10.26	11.01	11.25	12.01	13.34
	4H	11.32	12.03	12.33	13.04	14.38	10.84	11.55	11.84	12.55	13.89
	6H	11.72	12.37	12.73	13.38	14.73	11.23	11.88	12.24	12.89	14.24
	8H	11.82	12.44	12.84	13.47	14.82	11.33	11.95	12.35	12.98	14.33
	12H	11.86	12.46	12.89	13.48	14.85	11.37	11.96	12.39	12.98	14.35
4H	2H	9.54	10.25	10.55	11.26	12.60	9.19	9.90	10.20	10.91	12.25
	3H	11.40	11.99	12.42	13.03	14.38	11.00	11.59	12.02	12.63	13.98
	4H	12.11	12.65	13.13	13.68	15.05	11.69	12.23	12.72	13.26	14.64
	6H	12.62	13.08	13.65	14.13	15.50	12.19	12.66	13.23	13.71	15.08
	8H	12.76	13.20	13.80	14.24	15.63	12.34	12.77	13.37	13.81	15.20
	12H	12.83	13.23	13.89	14.28	15.68	12.39	12.79	13.45	13.85	15.24
8H	4H	12.30	12.74	13.34	13.78	15.16	11.93	12.36	12.97	13.41	14.79
	6H	12.92	13.28	13.98	14.37	15.75	12.55	12.91	13.61	13.99	15.38
	8H	13.14	13.46	14.21	14.52	15.93	12.75	13.07	13.82	14.14	15.54
	12H	13.26	13.54	14.34	14.61	16.05	12.86	13.14	13.94	14.21	15.65
12H	4H	12.28	12.68	13.34	13.73	15.13	11.92	12.31	12.98	13.37	14.76
	6H	12.95	13.27	14.02	14.34	15.74	12.58	12.90	13.65	13.97	15.38
	8H	13.19	13.46	14.26	14.53	15.97	12.81	13.09	13.89	14.16	15.60