

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908455

Luminaire Tested: DFN2DIP-PN3F0-040D080US840-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908455
REPORT IS A COMBINATION OF REPORTS P901104 AND P897955
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-040D080US840-RLLONL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11431.7 lumens
Efficiency: N/A
Efficacy: 119.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 96.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908455

CATALOG NUMBER: DFN2DIP-PN3F0-040D080US840-RLLONL

Luminous Intensity Polar Plot

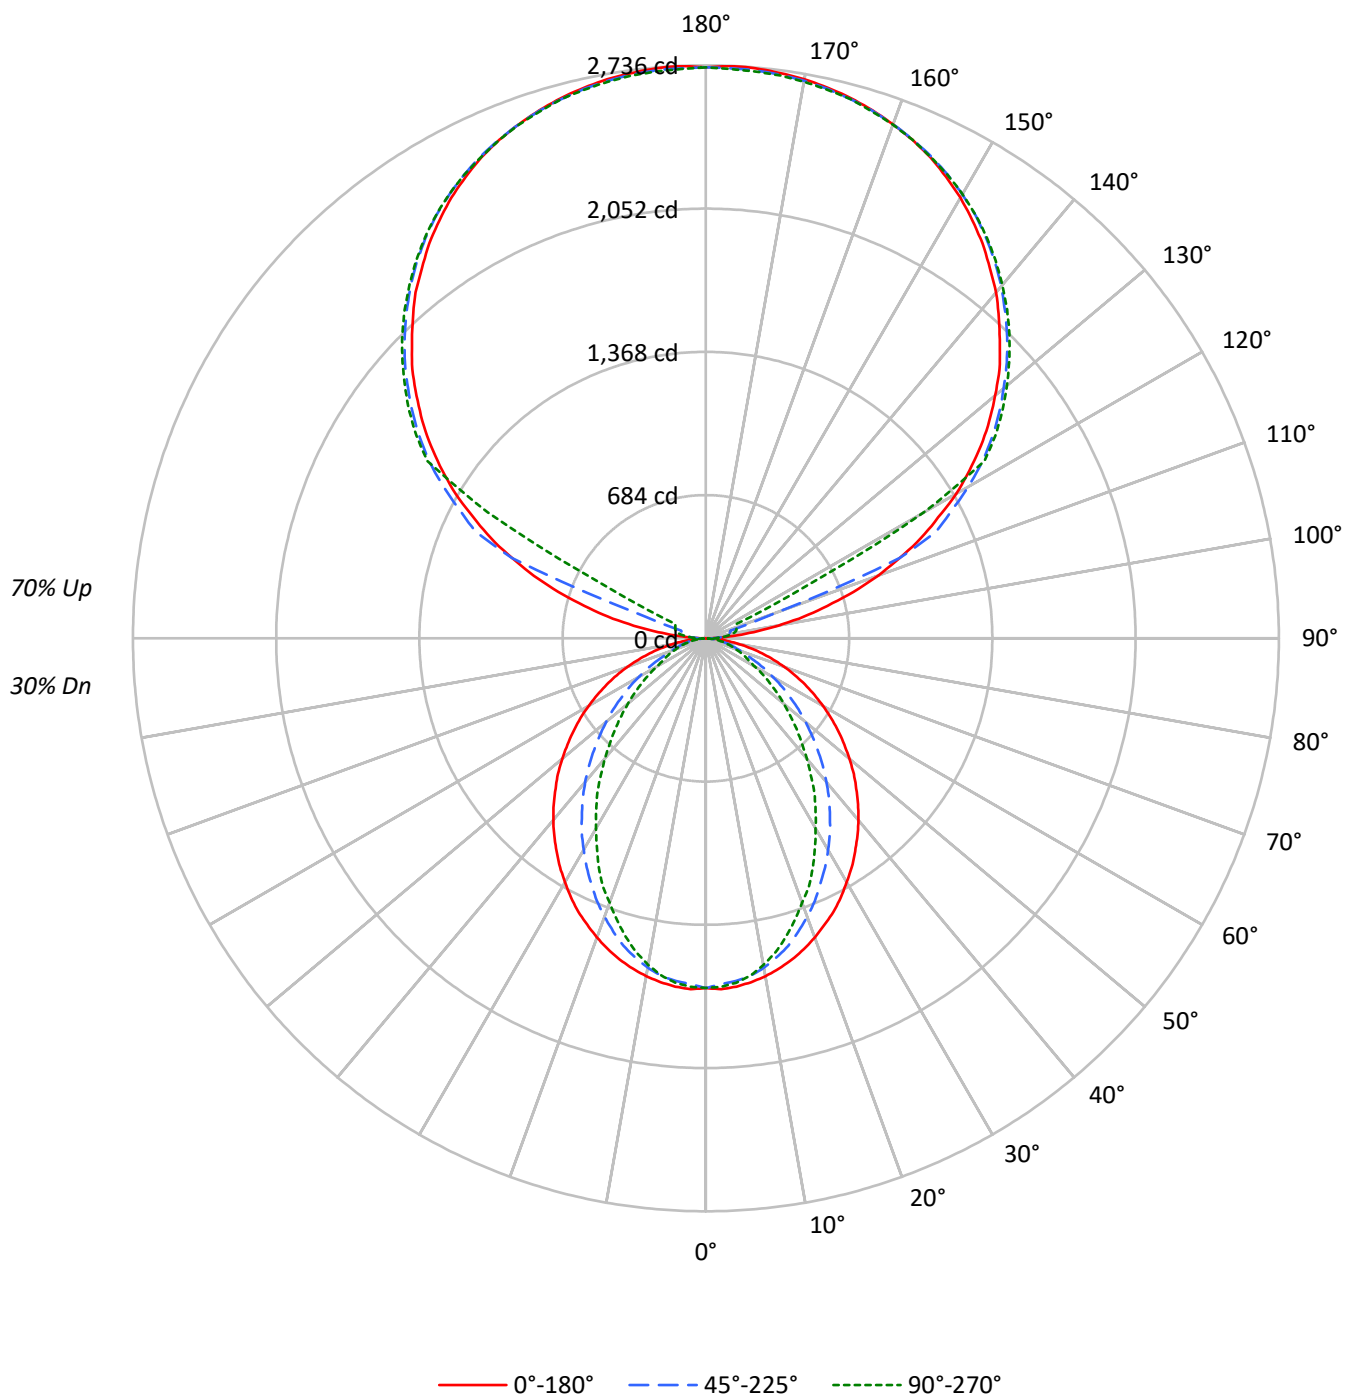

TEST NUMBER: P908455

CATALOG NUMBER: DFN2DIP-PN3F0-040D080US840-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38
1	94	90	86	83	84	81	77	75	64	62	60	48	47	46	34	33	32
2	85	78	73	68	76	71	66	62	56	53	50	43	40	39	30	29	28
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21
5	66	55	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16
7	56	44	37	31	50	40	34	29	32	28	24	25	22	19	18	16	15
8	52	40	33	28	46	36	30	25	29	25	21	23	20	17	17	15	13
9	48	37	29	25	43	33	27	23	27	22	19	21	18	15	16	13	12
10	45	33	27	22	40	30	24	20	25	20	17	20	16	14	14	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1952	1952	1952
5°	1954	1919	1932
10°	1933	1880	1869
15°	1905	1817	1770
20°	1869	1730	1651
25°	1832	1633	1535
30°	1782	1533	1388
35°	1733	1426	1259
40°	1684	1316	1112
45°	1626	1193	979
50°	1567	1070	848
55°	1504	938	723
60°	1432	801	594
65°	1349	661	534
70°	1248	531	482
75°	1121	465	437
80°	937	385	376
85°	637	251	278

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1840 cd/sqm

TEST NUMBER: P908455

CATALOG NUMBER: DFN2DIP-PN3F0-040D080US840-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	156.5	1.4
10°-20°	429.5	3.8
20°-30°	603.0	5.3
30°-40°	657.4	5.8
40°-50°	604.2	5.3
50°-60°	474.5	4.2
60°-70°	308.9	2.7
70°-80°	159.0	1.4
80°-90°	45.4	0.4
90°-100°	89.9	0.8
100°-110°	335.1	2.9
110°-120°	888.9	7.8
120°-130°	1474.3	12.9
130°-140°	1566.0	13.7
140°-150°	1455.4	12.7
150°-160°	1170.1	10.2
160°-170°	754.0	6.6
170°-180°	259.5	2.3
0°-30°	1189.0	10.4
0°-40°	1846.4	16.2
0°-60°	2925.1	25.6
0°-90°	3438.3	30.1
90°-120°	1314.0	11.5
90°-150°	5809.7	50.8
90°-180°	7993.0	69.9
0°-180°	11431.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1670	1670	1670	1670	1670	
5°	1670	1662	1642	1656	1651	158
15°	1588	1571	1520	1491	1476	447
25°	1441	1393	1293	1231	1209	663
35°	1242	1165	1032	937	903	777
45°	1015	914	756	648	612	784
55°	772	654	491	400	372	690
65°	521	399	263	212	207	517
75°	278	172	121	110	109	294
85°	65	33	29	29	29	75
90°	2	24	39	49	53	11
95°	128	63	77	87	85	152
105°	600	659	120	142	150	641
115°	1134	1168	1217	304	162	1117
125°	1604	1630	1667	1681	1687	1430
135°	1985	2016	2034	2054	2050	1533
145°	2302	2300	2334	2348	2338	1440
155°	2535	2518	2541	2553	2537	1168
165°	2671	2660	2665	2679	2665	755
175°	2732	2719	2723	2736	2717	260
180°	2726	2726	2726	2726	2726	

TEST NUMBER: P908455

CATALOG NUMBER: DFN2DIP-PN3F0-040D080US840-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1669.5	1669.5	1669.5	1669.5	1669.5
2.5°	1677.1	1669.5	1652.8	1668.1	1665.0
5°	1669.5	1661.9	1642.2	1655.9	1651.4
7.5°	1655.9	1646.9	1625.8	1631.6	1624.2
10°	1637.8	1627.2	1597.0	1592.4	1583.5
12.5°	1615.2	1601.5	1560.6	1551.7	1535.0
15°	1587.9	1571.2	1519.9	1491.3	1476.2
17.5°	1556.2	1532.0	1468.4	1435.3	1411.1
20°	1519.9	1489.7	1414.1	1376.4	1343.1
22.5°	1480.7	1445.9	1358.2	1306.9	1284.3
25°	1441.4	1393.0	1293.2	1231.4	1208.6
27.5°	1394.6	1343.1	1232.8	1161.9	1127.0
30°	1344.7	1287.2	1166.3	1089.3	1048.5
32.5°	1296.4	1226.8	1103.0	1012.3	974.4
35°	1242.0	1164.9	1032.0	936.8	903.4
37.5°	1189.1	1105.9	965.4	861.1	823.4
40°	1133.2	1042.6	896.0	788.7	749.4
42.5°	1075.7	979.1	826.5	714.6	676.9
45°	1015.3	914.0	755.5	648.1	611.9
47.5°	958.0	850.7	687.5	580.2	546.9
50°	894.4	787.2	621.0	516.6	485.0
52.5°	832.4	719.1	557.5	457.8	429.1
55°	772.0	654.2	491.0	400.4	371.7
57.5°	710.1	589.3	432.1	347.5	323.4
60°	646.6	525.7	370.1	293.2	269.0
62.5°	584.8	463.9	317.2	244.8	232.8
65°	521.3	398.8	262.9	211.6	206.9
67.5°	460.9	338.4	211.6	185.8	181.3
70°	397.4	279.5	175.2	160.2	154.0
72.5°	337.0	225.1	146.5	134.5	131.5
75°	277.9	172.2	120.9	110.3	108.9
77.5°	219.1	122.3	95.2	89.2	86.0
80°	164.6	87.7	72.4	66.6	66.6
82.5°	114.8	59.0	49.9	46.8	46.8
85°	64.9	33.2	28.7	28.7	28.7
87.5°	24.2	12.0	12.0	10.6	10.6
90°	1.9	23.6	39.4	49.4	53.2
92.5°	49.4	41.5	47.4	51.3	53.2
95°	128.2	63.0	76.9	86.9	84.8
97.5°	230.8	69.1	100.5	106.6	108.5
100°	349.3	79.0	112.5	128.2	132.1
102.5°	479.4	475.5	116.4	137.9	144.1
105°	599.8	659.0	120.4	142.0	150.0
107.5°	739.8	789.0	124.4	145.9	153.9
110°	874.1	915.3	345.4	148.0	155.8

TEST NUMBER: P908455

CATALOG NUMBER: DFN2DIP-PN3F0-040D080US840-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1000.4	1035.7	1002.3	151.8	157.9
115°	1134.4	1167.9	1217.3	303.9	161.9
117.5°	1250.8	1290.2	1323.9	1041.6	524.8
120°	1381.1	1410.6	1446.2	1469.9	1203.5
122.5°	1491.4	1523.1	1562.7	1574.4	1576.5
125°	1603.9	1629.6	1667.1	1680.9	1686.8
127.5°	1706.5	1734.1	1763.9	1783.5	1785.4
130°	1803.2	1834.8	1856.4	1878.2	1876.3
132.5°	1901.9	1927.6	1949.2	1967.0	1965.1
135°	1984.8	2016.4	2034.0	2054.0	2049.9
137.5°	2071.5	2095.2	2115.1	2134.8	2128.9
140°	2156.3	2172.2	2193.8	2211.6	2201.7
142.5°	2227.6	2241.3	2266.8	2282.6	2272.7
145°	2302.5	2300.4	2333.9	2347.7	2337.8
147.5°	2367.4	2361.6	2395.0	2404.9	2397.1
150°	2430.6	2416.8	2448.4	2460.1	2450.3
152.5°	2483.9	2468.1	2497.6	2509.6	2495.8
155°	2535.2	2517.6	2541.2	2552.9	2537.3
157.5°	2576.6	2560.9	2578.7	2592.5	2576.6
160°	2612.2	2600.3	2612.2	2623.9	2610.1
162.5°	2643.6	2631.9	2641.7	2655.5	2637.8
165°	2671.3	2659.6	2665.4	2679.2	2665.4
167.5°	2693.0	2681.1	2687.2	2701.0	2683.2
170°	2710.9	2698.9	2702.9	2716.7	2698.9
172.5°	2722.6	2710.9	2714.8	2728.7	2710.9
175°	2732.4	2718.6	2722.6	2736.3	2716.7
177.5°	2736.3	2722.6	2724.6	2738.5	2720.7
180°	2726.5	2726.5	2726.5	2726.5	2726.5

TEST NUMBER: P908455

CATALOG NUMBER: DFN2DIP-PN3F0-040D080US840-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.21	7.90	8.33	9.01	10.54	3.18	3.87	4.29	4.97	6.51
	3H	8.87	9.49	10.00	10.60	12.15	4.35	4.97	5.47	6.08	7.63
	4H	9.47	10.05	10.60	11.17	12.72	4.79	5.37	5.92	6.49	8.04
	6H	9.88	10.42	11.02	11.54	13.10	5.10	5.64	6.24	6.75	8.32
	8H	10.00	10.51	11.14	11.64	13.20	5.18	5.69	6.33	6.83	8.38
	12H	10.05	10.54	11.20	11.67	13.25	5.22	5.70	6.37	6.83	8.41
4H	2H	7.21	7.80	8.35	8.91	10.47	3.75	4.34	4.89	5.45	7.01
	3H	9.02	9.51	10.17	10.65	12.21	5.08	5.57	6.23	6.71	8.28
	4H	9.70	10.15	10.85	11.28	12.87	5.62	6.07	6.77	7.20	8.78
	6H	10.20	10.59	11.36	11.74	13.32	6.02	6.41	7.18	7.56	9.14
	8H	10.37	10.73	11.53	11.87	13.47	6.15	6.51	7.30	7.65	9.24
	12H	10.46	10.78	11.63	11.94	13.54	6.20	6.53	7.37	7.68	9.28
8H	4H	9.66	10.01	10.81	11.16	12.75	5.89	6.24	7.04	7.39	8.98
	6H	10.21	10.51	11.39	11.69	13.28	6.39	6.69	7.57	7.87	9.46
	8H	10.42	10.68	11.60	11.85	13.46	6.58	6.83	7.76	8.00	9.61
	12H	10.55	10.78	11.73	11.94	13.58	6.68	6.91	7.87	8.07	9.72
12H	4H	9.60	9.93	10.77	11.08	12.68	5.88	6.21	7.05	7.36	8.96
	6H	10.19	10.44	11.37	11.61	13.22	6.44	6.70	7.62	7.86	9.47
	8H	10.40	10.62	11.58	11.78	13.43	6.64	6.86	7.82	8.03	9.67