

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908506

Luminaire Tested: DFN2DIP-PN3F0-060D070US840-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908506
REPORT IS A COMBINATION OF REPORTS P899574 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-060D070US840-RLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11406.4 lumens
Efficiency: N/A
Efficacy: 102.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 111.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9821
Total Harmonic Distortion (THDi): 0.08
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908506
CATALOG NUMBER: DFN2DIP-PN3F0-060D070US840-RLFL

Luminous Intensity Polar Plot

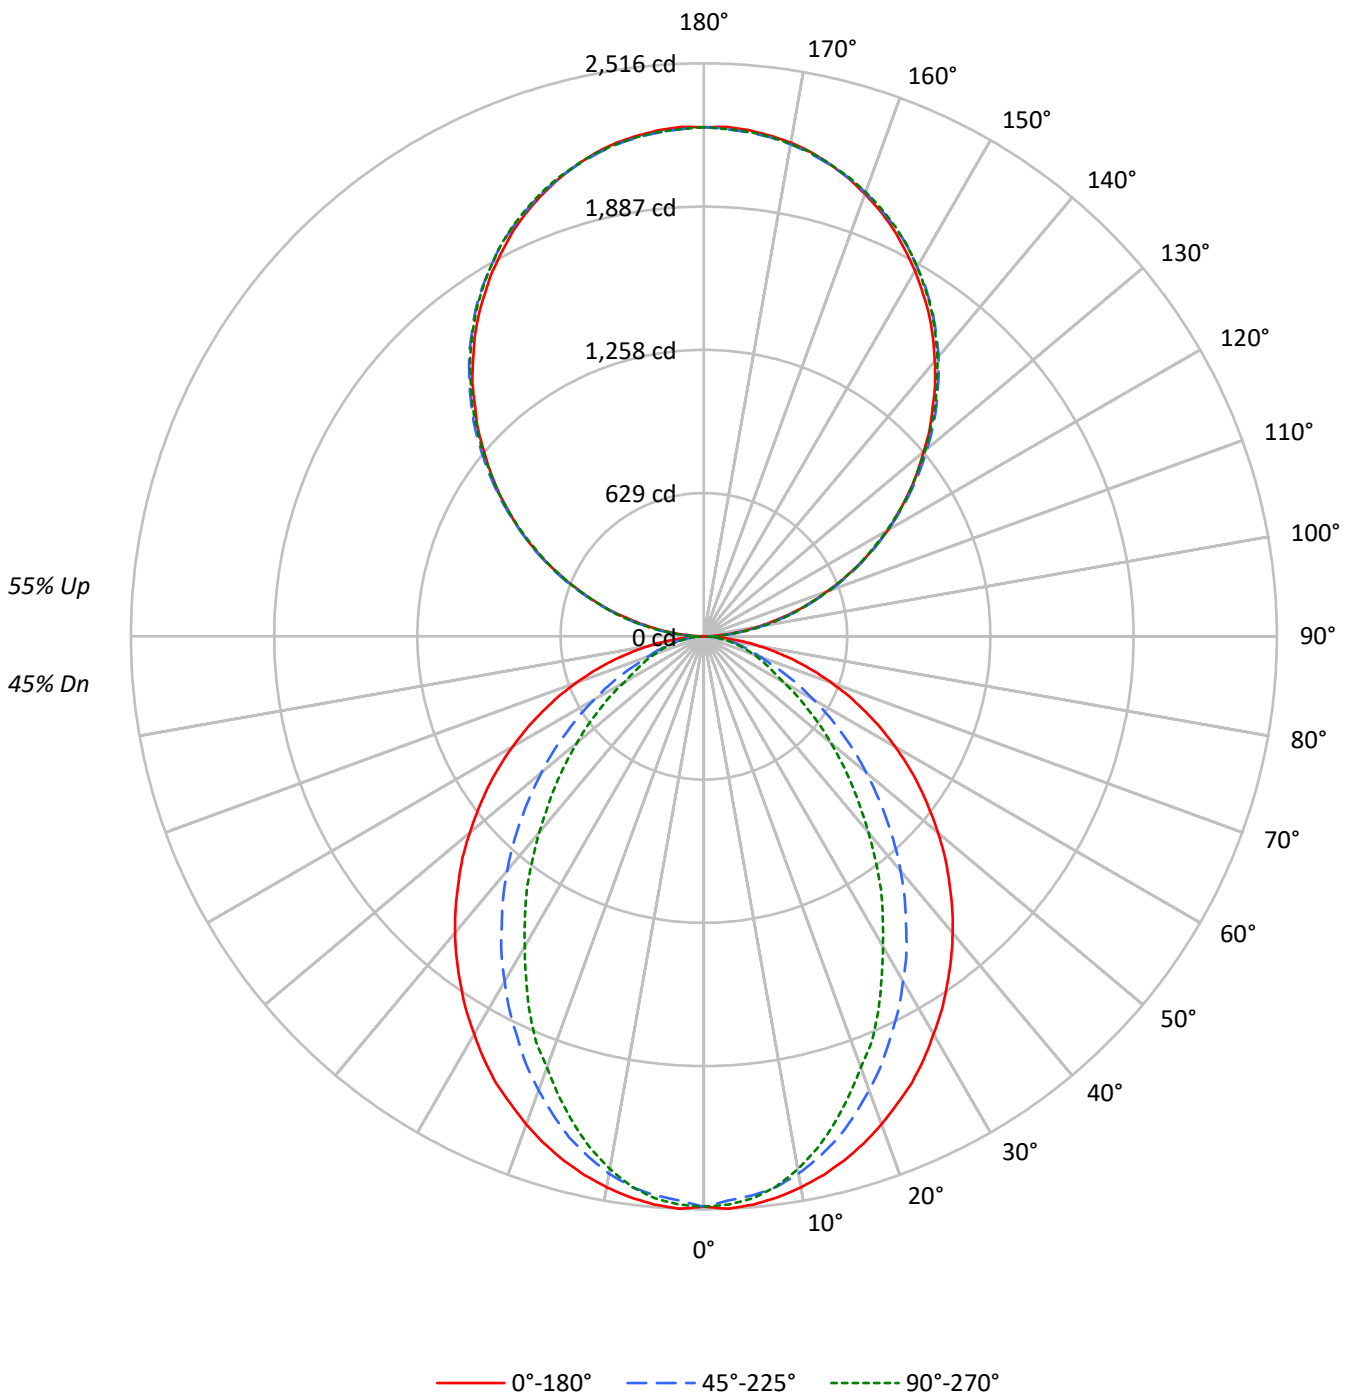



TEST NUMBER: P908506
 CATALOG NUMBER: DFN2DIP-PN3F0-060D070US840-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	45	45	45	45
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	44	39	39	39	39
2	89	82	76	71	81	75	70	66	63	59	56	52	49	47	41	40	38	33	33	33	33
3	81	72	65	60	74	67	60	56	56	51	48	46	43	40	37	35	33	29	29	29	29
4	75	64	57	51	68	59	53	47	50	45	41	41	38	35	33	31	29	25	25	25	25
5	69	57	50	44	63	53	46	41	45	40	36	37	33	30	30	28	25	22	22	22	22
6	63	52	44	38	58	48	41	36	41	35	31	34	30	27	28	25	23	20	20	20	20
7	59	47	39	34	54	43	36	32	37	32	28	31	27	24	25	22	20	18	18	18	18
8	54	42	35	30	50	39	33	28	34	28	25	28	24	21	23	20	18	16	16	16	16
9	51	39	32	27	47	36	30	25	31	26	22	26	22	19	22	19	17	14	14	14	14
10	47	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15	13	13	13	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2927	2927	2927
5°	2930	2879	2898
10°	2900	2820	2803
15°	2858	2725	2656
20°	2803	2595	2476
25°	2748	2449	2302
30°	2673	2300	2082
35°	2600	2139	1889
40°	2526	1973	1668
45°	2439	1790	1468
50°	2350	1605	1272
55°	2257	1407	1084
60°	2148	1201	891
65°	2023	992	801
70°	1872	796	723
75°	1682	698	655
80°	1406	579	564
85°	955	376	416

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2439 cd/sqm



TEST NUMBER: P908506

CATALOG NUMBER: DFN2DIP-PN3F0-060D070US840-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	234.7	2.1
10°-20°	644.3	5.6
20°-30°	904.6	7.9
30°-40°	986.1	8.6
40°-50°	906.3	7.9
50°-60°	711.7	6.2
60°-70°	463.3	4.1
70°-80°	238.5	2.1
80°-90°	67.2	0.6
90°-100°	138.3	1.2
100°-110°	439.6	3.9
110°-120°	752.2	6.6
120°-130°	989.3	8.7
130°-140°	1110.5	9.7
140°-150°	1088.9	9.5
150°-160°	913.5	8.0
160°-170°	605.8	5.3
170°-180°	211.7	1.9
0°-30°	1783.6	15.6
0°-40°	2769.6	24.3
0°-60°	4387.7	38.5
0°-90°	5156.7	45.2
90°-120°	1330.1	11.7
90°-150°	4518.8	39.6
90°-180°	6250.0	54.8
0°-180°	11406.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2504	2504	2504	2504	2504	
5°	2504	2493	2463	2484	2477	237
15°	2382	2357	2280	2237	2214	671
25°	2162	2090	1940	1847	1813	994
35°	1863	1747	1548	1405	1355	1166
45°	1523	1371	1133	972	918	1176
55°	1158	981	736	601	558	1035
65°	782	598	394	317	310	775
75°	417	258	181	165	163	441
85°	97	50	43	43	43	112
90°	2	24	66	62	64	11
95°	98	117	121	121	117	109
105°	406	411	415	419	419	428
115°	755	766	762	760	755	747
125°	1098	1115	1109	1103	1101	981
135°	1420	1441	1445	1443	1438	1098
145°	1724	1738	1748	1750	1743	1077
155°	1972	1977	1983	1992	1986	907
165°	2145	2143	2143	2156	2147	605
175°	2232	2226	2222	2236	2224	212
180°	2236	2236	2236	2236	2236	



TEST NUMBER: P908506

CATALOG NUMBER: DFN2DIP-PN3F0-060D070US840-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2504.3	2504.3	2504.3	2504.3	2504.3
2.5°	2515.6	2504.3	2479.2	2502.0	2497.5
5°	2504.3	2493.0	2463.4	2483.9	2477.1
7.5°	2483.9	2470.3	2438.6	2447.5	2436.2
10°	2456.6	2440.7	2395.6	2388.6	2375.1
12.5°	2422.8	2402.3	2341.0	2327.5	2302.5
15°	2381.9	2356.8	2279.9	2236.9	2214.2
17.5°	2334.3	2297.9	2202.7	2152.9	2116.7
20°	2279.9	2234.4	2121.2	2064.7	2014.7
22.5°	2221.0	2168.8	2037.3	1960.4	1926.4
25°	2162.1	2089.5	1940.0	1847.1	1813.0
27.5°	2091.9	2014.7	1849.3	1742.7	1690.6
30°	2017.1	1930.8	1749.5	1634.1	1572.8
32.5°	1944.5	1840.2	1654.6	1518.4	1461.7
35°	1863.0	1747.4	1548.0	1405.1	1355.1
37.5°	1783.6	1658.8	1448.2	1291.7	1235.2
40°	1699.7	1563.9	1343.8	1183.0	1124.1
42.5°	1613.7	1468.6	1239.7	1071.9	1015.4
45°	1523.0	1371.0	1133.3	972.1	917.8
47.5°	1436.9	1276.1	1031.3	870.2	820.4
50°	1341.7	1180.8	931.5	775.0	727.6
52.5°	1248.6	1078.6	836.3	686.7	643.7
55°	1158.0	981.3	736.5	600.7	557.5
57.5°	1065.2	883.8	648.2	521.3	484.9
60°	970.0	788.7	555.2	439.8	403.4
62.5°	877.2	695.9	475.8	367.2	349.1
65°	781.9	598.2	394.4	317.4	310.4
67.5°	691.3	507.6	317.4	278.7	272.0
70°	596.0	419.3	262.8	240.2	231.1
72.5°	505.4	337.6	219.7	201.8	197.1
75°	417.0	258.2	181.3	165.4	163.3
77.5°	328.7	183.5	142.8	133.7	129.2
80°	246.9	131.5	108.7	99.8	99.8
82.5°	172.2	88.5	74.7	70.2	70.2
85°	97.4	49.8	43.0	43.0	43.0
87.5°	36.4	18.1	18.1	15.9	15.9
90°	2.0	24.2	66.0	62.0	64.0
92.5°	41.8	56.7	58.7	60.7	60.7
95°	98.4	117.2	120.7	120.7	117.2
97.5°	163.8	181.3	188.7	188.7	188.7
100°	239.2	254.8	260.1	260.1	258.1
102.5°	318.8	330.2	337.7	339.7	337.7
105°	405.8	411.1	415.2	418.6	418.6
107.5°	492.0	500.1	500.1	501.5	492.0
110°	575.6	586.4	586.4	586.4	581.0



TEST NUMBER: P908506

CATALOG NUMBER: DFN2DIP-PN3F0-060D070US840-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	665.9	677.4	675.4	669.9	665.9
115°	754.9	765.7	762.3	760.3	754.9
117.5°	843.1	858.0	848.6	843.1	837.8
120°	932.1	947.0	932.1	932.1	926.0
122.5°	1013.0	1031.9	1022.5	1017.0	1013.0
125°	1097.9	1114.8	1109.4	1103.4	1101.4
127.5°	1180.8	1201.7	1194.4	1186.3	1180.8
130°	1258.4	1282.6	1279.3	1275.3	1267.8
132.5°	1345.3	1364.2	1365.5	1356.1	1350.7
135°	1420.2	1441.0	1445.1	1443.0	1437.6
137.5°	1503.7	1520.6	1523.9	1522.6	1514.5
140°	1577.2	1594.1	1603.5	1603.5	1596.1
142.5°	1652.6	1669.5	1674.9	1676.9	1669.5
145°	1724.1	1737.6	1748.4	1750.4	1743.0
147.5°	1788.2	1805.0	1813.1	1816.4	1809.1
150°	1854.2	1865.6	1873.1	1879.2	1873.1
152.5°	1912.8	1924.3	1933.7	1941.2	1933.7
155°	1971.5	1976.8	1983.0	1992.4	1986.3
157.5°	2022.1	2026.1	2029.4	2043.0	2033.5
160°	2067.2	2071.2	2073.3	2084.7	2076.6
162.5°	2109.0	2109.0	2111.0	2123.7	2114.4
165°	2144.7	2142.6	2142.6	2156.2	2146.7
167.5°	2177.1	2171.0	2171.0	2184.4	2175.0
170°	2201.3	2196.0	2193.9	2207.4	2196.0
172.5°	2218.2	2212.7	2210.7	2224.2	2212.7
175°	2231.6	2226.2	2222.2	2235.6	2224.2
177.5°	2239.1	2233.6	2229.6	2241.1	2229.6
180°	2235.6	2235.6	2235.6	2235.6	2235.6



TEST NUMBER: P908506
 CATALOG NUMBER: DFN2DIP-PN3F0-060D070US840-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.37	11.17	11.38	12.18	13.52	6.34	7.13	7.34	8.14	9.48
	3H	12.04	12.75	13.06	13.77	15.13	7.52	8.23	8.53	9.25	10.61
	4H	12.64	13.32	13.67	14.34	15.71	7.96	8.63	8.99	9.66	11.03
	6H	13.06	13.68	14.10	14.70	16.08	8.28	8.89	9.31	9.92	11.30
	8H	13.18	13.77	14.22	14.81	16.19	8.36	8.95	9.41	9.99	11.37
	12H	13.24	13.80	14.29	14.83	16.23	8.40	8.96	9.45	10.00	11.40
4H	2H	10.38	11.06	11.42	12.08	13.45	6.93	7.60	7.96	8.62	9.99
	3H	12.20	12.76	13.25	13.81	15.19	8.27	8.82	9.31	9.87	11.26
	4H	12.89	13.40	13.94	14.44	15.85	8.81	9.32	9.86	10.36	11.77
	6H	13.40	13.83	14.45	14.90	16.30	9.22	9.66	10.28	10.72	12.12
	8H	13.57	13.98	14.63	15.03	16.45	9.34	9.75	10.40	10.81	12.23
	12H	13.66	14.03	14.73	15.10	16.52	9.40	9.77	10.48	10.84	12.26
8H	4H	12.85	13.26	13.91	14.32	15.73	9.08	9.49	10.14	10.55	11.96
	6H	13.41	13.75	14.49	14.85	16.26	9.59	9.93	10.67	11.03	12.44
	8H	13.62	13.92	14.71	15.00	16.43	9.78	10.07	10.87	11.16	12.59
	12H	13.76	14.02	14.85	15.10	16.57	9.89	10.15	10.98	11.23	12.70
12H	4H	12.80	13.17	13.88	14.24	15.66	9.08	9.45	10.16	10.53	11.95
	6H	13.39	13.68	14.47	14.77	16.20	9.64	9.93	10.73	11.02	12.45
	8H	13.60	13.86	14.69	14.94	16.41	9.84	10.10	10.93	11.18	12.65