

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P908573

Luminaire Tested: DFN2DIP-PN3F0-090D030US840-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P908573
REPORT IS A COMBINATION OF REPORTS P901043 AND P897955
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-090D030US840-FLONL
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11997.3 lumens
Efficiency: N/A
Efficacy: 103.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 116.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P908573

CATALOG NUMBER: DFN2DIP-PN3F0-090D030US840-FLLONL

Luminous Intensity Polar Plot

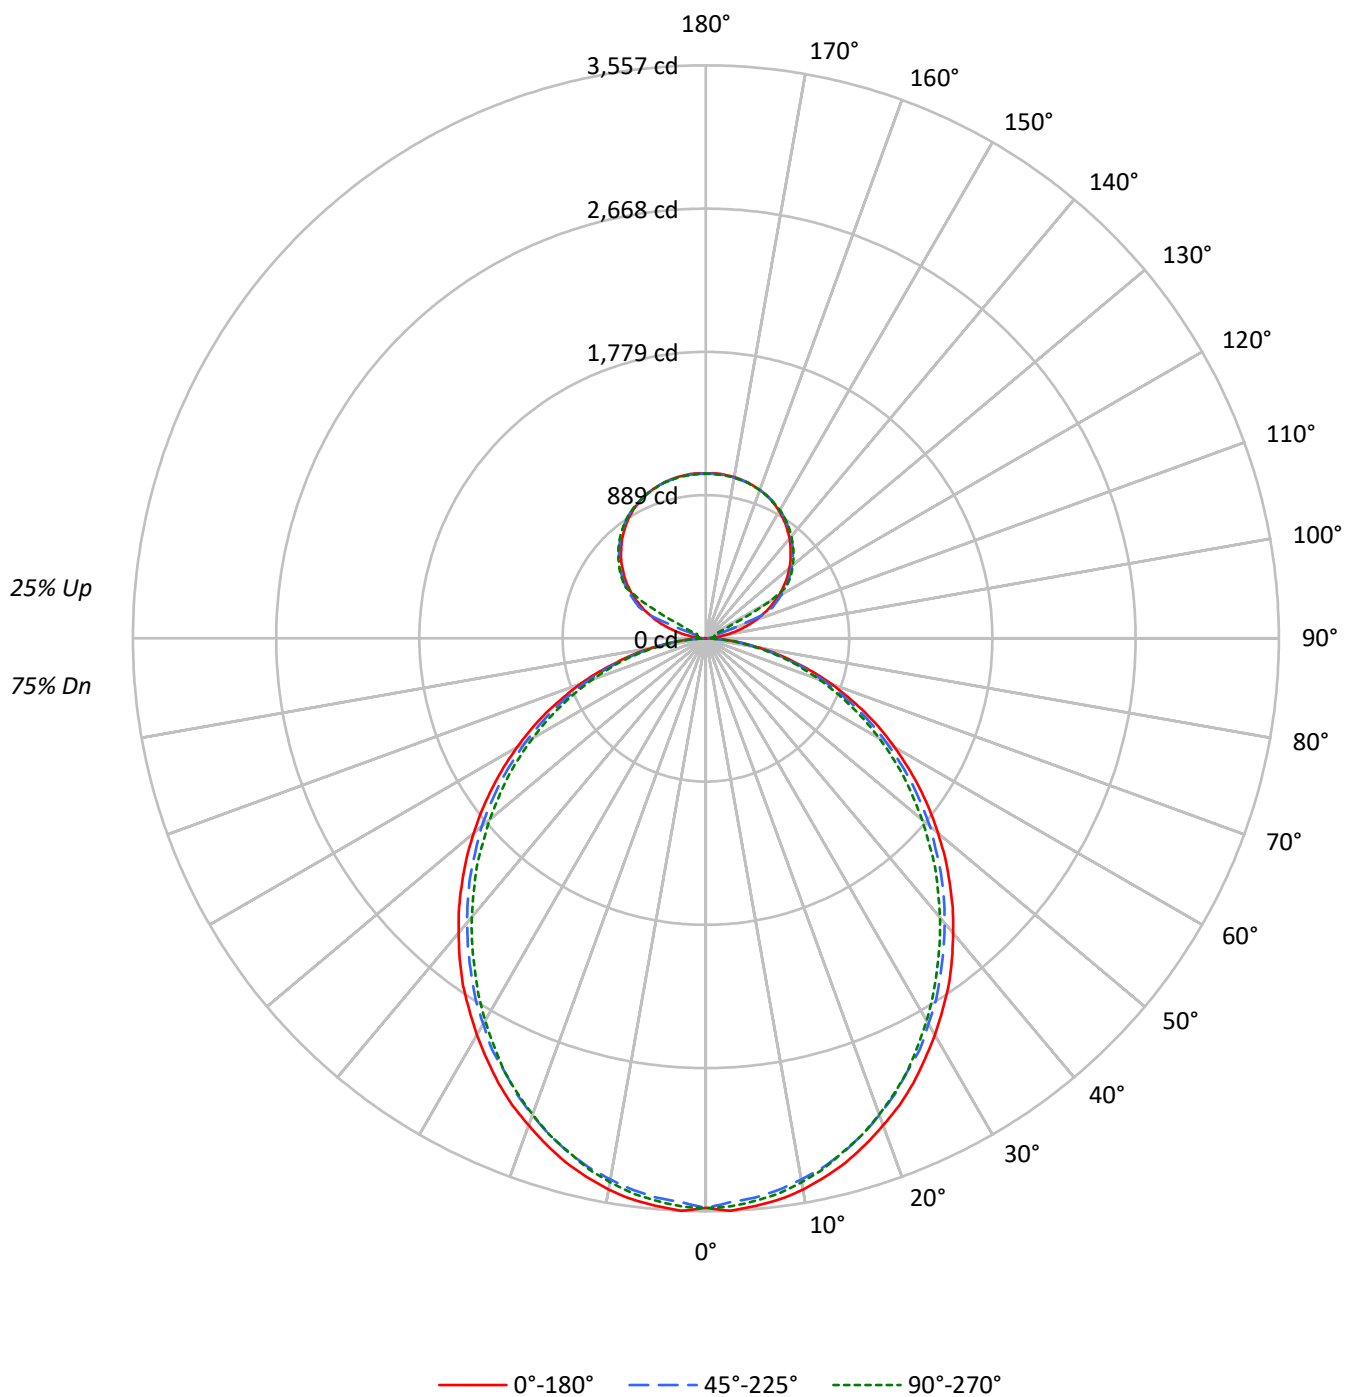

TEST NUMBER: P908573

CATALOG NUMBER: DFN2DIP-PN3F0-090D030US840-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	113	113	113	113	108	108	108	108	97	97	97	88	88	88	79	79	79
1	103	99	95	91	98	94	91	87	85	83	80	77	75	73	70	68	67
2	94	86	80	75	89	82	77	72	75	70	66	68	64	61	62	59	56
3	86	76	68	62	81	73	66	60	66	61	56	60	56	52	55	51	48
4	79	67	59	53	75	64	57	51	59	53	48	54	49	45	49	45	41
5	72	60	52	46	69	58	50	44	53	46	41	48	43	39	44	40	36
6	67	54	46	40	63	52	44	39	48	41	36	44	38	34	40	35	32
7	62	49	41	35	59	47	39	34	43	37	32	40	34	30	37	32	28
8	58	45	37	31	55	43	36	30	40	33	29	37	31	27	34	29	25
9	54	41	33	28	51	39	32	27	37	30	26	34	28	24	31	26	23
10	50	38	30	25	48	36	29	25	34	28	23	31	26	22	29	24	21

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4134	4134	4134
5°	4138	4074	4102
10°	4102	4016	4045
15°	4040	3947	3956
20°	3955	3852	3866
25°	3872	3739	3761
30°	3768	3634	3629
35°	3669	3511	3489
40°	3547	3386	3356
45°	3426	3260	3220
50°	3294	3128	3062
55°	3155	2976	2916
60°	2997	2796	2749
65°	2825	2608	2553
70°	2606	2380	2340
75°	2304	2106	2142
80°	1937	1755	1768
85°	1366	1162	1152

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3426 cd/sqm

TEST NUMBER: P908573

CATALOG NUMBER: DFN2DIP-PN3F0-090D030US840-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	332.9	2.8
10°-20°	936.5	7.8
20°-30°	1376.3	11.5
30°-40°	1598.5	13.3
40°-50°	1596.5	13.3
50°-60°	1392.1	11.6
60°-70°	1029.1	8.6
70°-80°	582.2	4.9
80°-90°	155.5	1.3
90°-100°	33.7	0.3
100°-110°	125.7	1.0
110°-120°	333.3	2.8
120°-130°	552.9	4.6
130°-140°	587.3	4.9
140°-150°	545.8	4.5
150°-160°	438.8	3.7
160°-170°	282.8	2.4
170°-180°	97.3	0.8
0°-30°	2645.7	22.1
0°-40°	4244.2	35.4
0°-60°	7232.9	60.3
0°-90°	8999.7	75.0
90°-120°	492.7	4.1
90°-150°	2178.7	18.2
90°-180°	2998.0	25.0
0°-180°	11997.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3536	3536	3536	3536	3536	
5°	3536	3523	3486	3513	3506	336
15°	3367	3346	3302	3316	3299	948
25°	3047	3020	2962	2969	2962	1402
35°	2629	2595	2540	2520	2503	1642
45°	2139	2115	2064	2027	2013	1651
55°	1619	1598	1558	1517	1500	1447
65°	1092	1071	1037	1007	990	1079
75°	571	565	547	527	534	610
85°	139	136	133	122	119	155
90°	1	9	15	19	20	11
95°	48	24	29	33	32	57
105°	225	247	45	53	56	240
115°	425	438	456	114	61	419
125°	602	611	625	630	633	536
135°	744	756	763	770	769	575
145°	863	863	875	880	877	540
155°	951	944	953	957	952	438
165°	1002	997	1000	1005	1000	283
175°	1025	1020	1021	1026	1019	98
180°	1022	1022	1022	1022	1022	

TEST NUMBER: P908573

CATALOG NUMBER: DFN2DIP-PN3F0-090D030US840-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3536.4	3536.4	3536.4	3536.4	3536.4
2.5°	3557.0	3540.1	3502.6	3536.4	3530.0
5°	3536.4	3523.1	3485.7	3512.7	3506.2
7.5°	3512.7	3492.5	3455.0	3482.4	3475.6
10°	3475.6	3451.7	3410.9	3438.0	3427.9
12.5°	3424.3	3404.1	3363.4	3380.2	3373.5
15°	3366.6	3346.4	3302.0	3315.7	3298.7
17.5°	3295.1	3274.9	3230.6	3247.5	3230.6
20°	3216.8	3196.6	3149.0	3159.1	3145.7
22.5°	3138.9	3108.3	3063.8	3063.8	3057.0
25°	3046.9	3019.8	2962.1	2968.6	2962.1
27.5°	2944.8	2920.9	2877.0	2866.9	2849.9
30°	2843.1	2815.6	2764.7	2754.6	2741.0
32.5°	2734.1	2713.9	2659.4	2638.9	2625.1
35°	2628.8	2594.8	2540.3	2519.8	2502.9
37.5°	2509.7	2479.0	2424.5	2400.8	2383.8
40°	2387.3	2360.0	2305.4	2275.1	2261.5
42.5°	2268.3	2240.9	2186.8	2152.5	2132.3
45°	2139.1	2115.4	2064.1	2026.9	2013.3
47.5°	2013.3	1989.4	1934.9	1897.4	1877.2
50°	1880.5	1863.5	1815.8	1768.3	1751.3
52.5°	1751.3	1727.5	1683.4	1646.0	1622.1
55°	1618.9	1598.3	1557.5	1516.8	1499.9
57.5°	1486.1	1469.2	1424.8	1384.0	1370.3
60°	1353.3	1340.0	1292.3	1254.9	1244.8
62.5°	1224.2	1200.3	1166.4	1132.6	1118.8
65°	1091.8	1071.2	1037.2	1006.6	989.7
67.5°	955.7	938.5	908.1	884.3	870.6
70°	829.8	816.1	785.5	761.6	748.3
72.5°	700.6	686.9	669.9	646.2	636.1
75°	571.2	564.6	547.3	527.1	534.0
77.5°	455.7	442.0	435.2	425.1	415.0
80°	340.2	336.6	329.7	319.6	312.9
82.5°	231.3	231.3	228.0	214.3	214.3
85°	139.3	136.0	132.8	122.3	119.1
87.5°	61.3	54.4	47.7	37.6	33.9
90°	0.7	8.9	14.7	18.6	19.9
92.5°	18.6	15.6	17.8	19.3	19.9
95°	48.1	23.6	28.8	32.6	31.8
97.5°	86.5	26.0	37.7	40.0	40.7
100°	131.0	29.6	42.2	48.1	49.6
102.5°	179.8	178.3	43.6	51.7	54.0
105°	224.9	247.1	45.1	53.2	56.2
107.5°	277.4	295.9	46.7	54.7	57.8
110°	327.8	343.3	129.5	55.5	58.5

TEST NUMBER: P908573

CATALOG NUMBER: DFN2DIP-PN3F0-090D030US840-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	375.2	388.4	375.9	57.0	59.2
115°	425.4	438.0	456.5	113.9	60.7
117.5°	469.1	483.8	496.4	390.6	196.8
120°	517.9	529.0	542.3	551.2	451.3
122.5°	559.3	571.2	586.0	590.4	591.2
125°	601.5	611.1	625.2	630.4	632.6
127.5°	640.0	650.3	661.5	668.8	669.5
130°	676.2	688.1	696.2	704.3	703.7
132.5°	713.2	722.9	730.9	737.6	736.9
135°	744.3	756.2	762.8	770.2	768.7
137.5°	776.8	785.7	793.1	800.5	798.3
140°	808.6	814.6	822.6	829.3	825.7
142.5°	835.4	840.5	850.1	856.0	852.3
145°	863.4	862.6	875.3	880.4	876.7
147.5°	887.8	885.6	898.2	901.8	898.9
150°	911.5	906.4	918.2	922.5	918.9
152.5°	931.4	925.5	936.7	941.1	935.9
155°	950.7	944.1	952.9	957.4	951.5
157.5°	966.2	960.4	967.0	972.2	966.2
160°	979.6	975.1	979.6	984.0	978.8
162.5°	991.4	986.9	990.7	995.8	989.2
165°	1001.7	997.3	999.6	1004.7	999.6
167.5°	1009.9	1005.4	1007.6	1012.9	1006.2
170°	1016.5	1012.1	1013.6	1018.8	1012.1
172.5°	1021.0	1016.5	1018.0	1023.2	1016.5
175°	1024.6	1019.5	1021.0	1026.1	1018.8
177.5°	1026.1	1021.0	1021.8	1026.9	1020.3
180°	1022.5	1022.5	1022.5	1022.5	1022.5

TEST NUMBER: P908573

CATALOG NUMBER: DFN2DIP-PN3F0-090D030US840-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.21	15.35	14.92	16.08	16.94	13.77	14.91	14.48	15.64	16.50
	3H	15.89	16.91	16.61	17.65	18.55	15.40	16.43	16.12	17.17	18.06
	4H	16.48	17.45	17.22	18.20	19.11	16.00	16.97	16.74	17.71	18.62
	6H	16.89	17.79	17.64	18.54	19.46	16.40	17.30	17.16	18.05	18.98
	8H	17.00	17.85	17.77	18.63	19.55	16.51	17.36	17.28	18.14	19.06
	12H	17.06	17.87	17.83	18.64	19.59	16.56	17.37	17.33	18.14	19.09
4H	2H	14.70	15.67	15.45	16.42	17.33	14.35	15.32	15.09	16.07	16.97
	3H	16.59	17.39	17.34	18.18	19.10	16.18	16.99	16.94	17.78	18.70
	4H	17.31	18.04	18.08	18.83	19.78	16.89	17.63	17.66	18.41	19.36
	6H	17.83	18.47	18.62	19.28	20.24	17.41	18.05	18.20	18.86	19.82
	8H	17.98	18.58	18.78	19.39	20.36	17.56	18.15	18.35	18.96	19.93
	12H	18.07	18.60	18.88	19.43	20.41	17.63	18.17	18.44	18.99	19.97
8H	4H	17.52	18.12	18.31	18.92	19.89	17.15	17.75	17.94	18.55	19.52
	6H	18.16	18.65	18.98	19.50	20.47	17.78	18.28	18.60	19.12	20.10
	8H	18.38	18.82	19.21	19.66	20.65	17.99	18.43	18.83	19.28	20.27
	12H	18.52	18.90	19.35	19.74	20.79	18.12	18.50	18.95	19.34	20.39
12H	4H	17.52	18.06	18.33	18.88	19.86	17.16	17.69	17.97	18.52	19.50
	6H	18.19	18.63	19.02	19.47	20.46	17.82	18.26	18.66	19.11	20.10
	8H	18.44	18.83	19.27	19.66	20.71	18.07	18.45	18.90	19.29	20.34