

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911177

Luminaire Tested: DFN2DIP-PN3F0-040D070US850-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911177
REPORT IS A COMBINATION OF REPORTS P901089 AND P897955
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-040D070US850-FLLONL
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12077.0 lumens
Efficiency: N/A
Efficacy: 135.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 89
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911177

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US850-FLLONL

Luminous Intensity Polar Plot

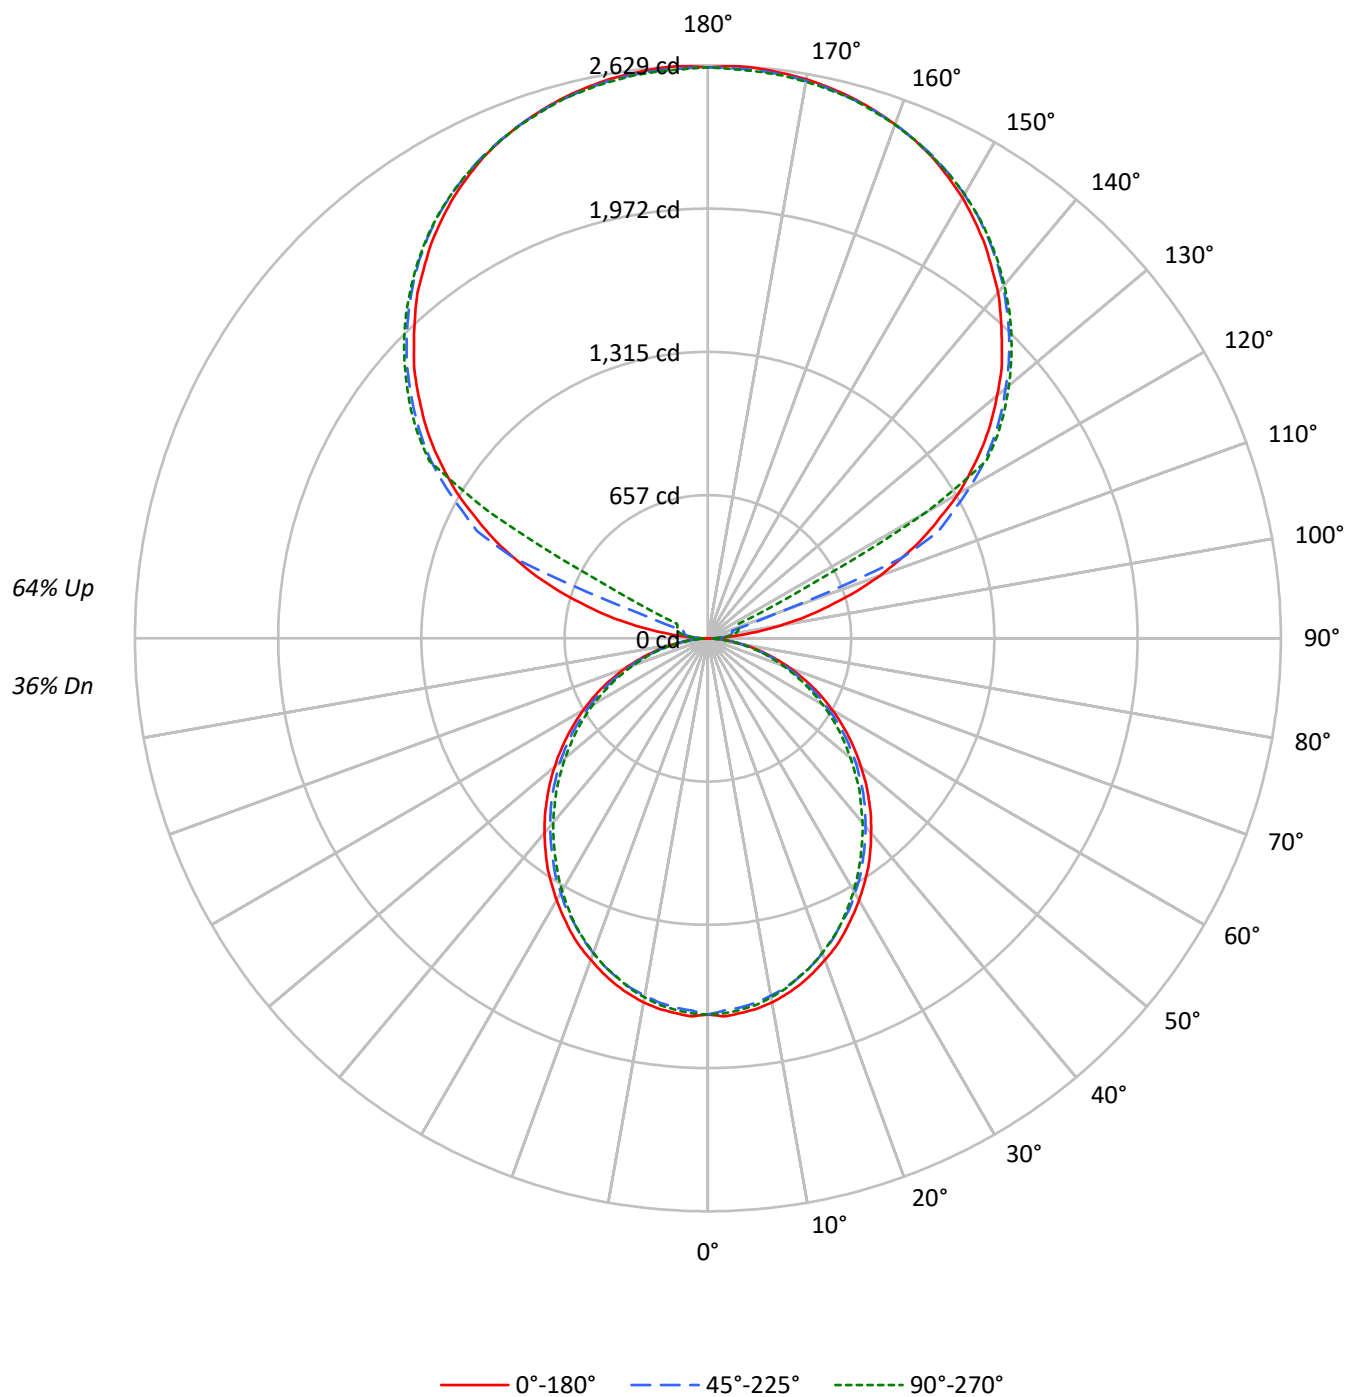

TEST NUMBER: P911177

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US850-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44
1	95	90	87	83	86	82	79	76	66	64	62	52	50	49	39	38	37
2	86	79	73	68	78	72	67	62	58	54	51	46	43	41	34	32	31
3	79	69	62	57	71	63	57	52	51	47	43	40	37	35	30	28	26
4	72	61	54	48	65	56	49	44	45	41	37	36	32	30	27	25	23
5	66	55	47	41	59	50	43	38	41	35	32	32	28	26	24	22	20
6	61	49	41	35	55	45	38	33	37	31	27	29	25	22	22	19	17
7	56	44	36	31	51	40	33	29	33	28	24	26	23	20	20	17	15
8	52	40	32	27	47	37	30	25	30	25	21	24	20	18	18	16	14
9	48	36	29	24	44	33	27	22	28	23	19	22	18	16	17	14	12
10	45	33	26	21	41	31	24	20	25	20	17	20	17	14	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2018	2018	2018
5°	2020	1988	2002
10°	2002	1960	1974
15°	1972	1926	1931
20°	1931	1880	1887
25°	1890	1825	1836
30°	1839	1774	1771
35°	1791	1713	1703
40°	1731	1652	1638
45°	1672	1591	1571
50°	1608	1527	1494
55°	1540	1453	1423
60°	1463	1365	1342
65°	1379	1273	1246
70°	1272	1162	1142
75°	1124	1028	1045
80°	945	857	863
85°	667	567	562

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1768 cd/sqm

TEST NUMBER: P911177

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US850-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.5	1.3
10°-20°	457.1	3.8
20°-30°	671.7	5.6
30°-40°	780.2	6.5
40°-50°	779.2	6.5
50°-60°	679.5	5.6
60°-70°	502.3	4.2
70°-80°	284.2	2.4
80°-90°	79.6	0.7
90°-100°	86.4	0.7
100°-110°	322.1	2.7
110°-120°	854.1	7.1
120°-130°	1416.6	11.7
130°-140°	1504.8	12.5
140°-150°	1398.5	11.6
150°-160°	1124.4	9.3
160°-170°	724.5	6.0
170°-180°	249.4	2.1
0°-30°	1291.3	10.7
0°-40°	2071.5	17.2
0°-60°	3530.2	29.2
0°-90°	4396.3	36.4
90°-120°	1262.6	10.5
90°-150°	5582.5	46.2
90°-180°	7681.0	63.6
0°-180°	12077.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1726	1726	1726	1726	1726	
5°	1726	1720	1701	1714	1711	164
15°	1643	1633	1612	1618	1610	463
25°	1487	1474	1446	1449	1446	684
35°	1283	1266	1240	1230	1222	801
45°	1044	1032	1007	989	983	806
55°	790	780	760	740	732	706
65°	533	523	506	491	483	527
75°	279	276	267	257	261	298
85°	68	66	65	60	58	76
90°	2	23	38	48	51	11
95°	123	61	74	84	82	146
105°	576	633	116	136	144	616
115°	1090	1122	1170	292	156	1073
125°	1541	1566	1602	1615	1621	1375
135°	1907	1938	1954	1974	1970	1473
145°	2212	2210	2243	2256	2246	1384
155°	2436	2419	2442	2453	2438	1123
165°	2567	2556	2561	2574	2561	725
175°	2626	2612	2616	2629	2610	250
180°	2620	2620	2620	2620	2620	

TEST NUMBER: P911177

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US850-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1726.0	1726.0	1726.0	1726.0	1726.0
2.5°	1736.1	1727.8	1709.5	1726.0	1722.9
5°	1726.0	1719.5	1701.2	1714.4	1711.3
7.5°	1714.4	1704.5	1686.2	1699.7	1696.3
10°	1696.3	1684.7	1664.8	1678.0	1673.0
12.5°	1671.3	1661.4	1641.5	1649.9	1646.4
15°	1643.1	1633.2	1611.6	1618.3	1610.0
17.5°	1608.3	1598.4	1576.8	1585.0	1576.8
20°	1570.0	1560.1	1537.0	1541.8	1535.4
22.5°	1532.0	1517.0	1495.4	1495.4	1492.0
25°	1487.1	1473.9	1445.7	1448.9	1445.7
27.5°	1437.3	1425.6	1404.2	1399.2	1391.0
30°	1387.6	1374.3	1349.4	1344.4	1337.8
32.5°	1334.5	1324.6	1298.0	1288.0	1281.2
35°	1283.0	1266.5	1239.9	1229.9	1221.6
37.5°	1224.9	1209.9	1183.3	1171.8	1163.5
40°	1165.2	1151.8	1125.2	1110.4	1103.8
42.5°	1107.1	1093.7	1067.3	1050.6	1040.7
45°	1044.0	1032.5	1007.4	989.3	982.6
47.5°	982.6	970.9	944.4	926.1	916.3
50°	917.8	909.5	886.3	863.0	854.7
52.5°	854.7	843.2	821.7	803.4	791.7
55°	790.2	780.1	760.2	740.3	732.1
57.5°	725.3	717.1	695.3	675.5	668.8
60°	660.5	654.0	630.8	612.5	607.5
62.5°	597.5	585.9	569.4	552.7	546.1
65°	532.9	522.8	506.3	491.3	483.1
67.5°	466.4	458.0	443.3	431.6	425.0
70°	405.0	398.4	383.4	371.7	365.2
72.5°	342.0	335.3	327.0	315.4	310.4
75°	278.8	275.6	267.2	257.3	260.6
77.5°	222.4	215.7	212.4	207.4	202.5
80°	166.0	164.2	160.9	156.0	152.7
82.5°	112.9	112.9	111.3	104.6	104.6
85°	68.0	66.4	64.8	59.7	58.1
87.5°	29.9	26.6	23.3	18.3	16.5
90°	1.8	22.7	37.8	47.5	51.1
92.5°	47.5	39.8	45.5	49.4	51.1
95°	123.1	60.6	73.9	83.5	81.5
97.5°	221.7	66.4	96.6	102.5	104.2
100°	335.7	75.9	108.0	123.1	127.0
102.5°	460.6	457.0	111.9	132.6	138.4
105°	576.3	633.2	115.7	136.4	144.1
107.5°	710.9	758.2	119.6	140.3	147.9
110°	840.0	879.5	331.8	142.3	149.7

TEST NUMBER: P911177

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US850-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	961.3	995.2	963.1	145.8	151.7
115°	1090.0	1122.2	1169.7	292.0	155.6
117.5°	1201.9	1239.8	1272.1	1000.9	504.3
120°	1327.0	1355.4	1389.7	1412.4	1156.5
122.5°	1433.0	1463.4	1501.6	1512.8	1514.8
125°	1541.2	1565.9	1602.0	1615.3	1620.8
127.5°	1639.8	1666.3	1694.9	1713.8	1715.6
130°	1732.7	1763.1	1783.8	1804.8	1803.0
132.5°	1827.5	1852.3	1873.0	1890.1	1888.3
135°	1907.1	1937.5	1954.5	1973.6	1969.8
137.5°	1990.4	2013.3	2032.4	2051.3	2045.7
140°	2071.9	2087.2	2108.0	2125.1	2115.6
142.5°	2140.4	2153.7	2178.2	2193.3	2183.8
145°	2212.5	2210.5	2242.6	2255.9	2246.5
147.5°	2274.8	2269.2	2301.4	2310.8	2303.4
150°	2335.6	2322.4	2352.7	2363.9	2354.5
152.5°	2386.7	2371.6	2400.0	2411.4	2398.2
155°	2436.0	2419.1	2441.8	2453.1	2438.0
157.5°	2475.8	2460.8	2477.8	2491.1	2475.8
160°	2510.1	2498.6	2510.1	2521.3	2508.0
162.5°	2540.3	2529.0	2538.4	2551.7	2534.6
165°	2566.8	2555.6	2561.1	2574.4	2561.1
167.5°	2587.7	2576.2	2582.1	2595.4	2578.3
170°	2604.8	2593.4	2597.2	2610.5	2593.4
172.5°	2616.1	2604.8	2608.7	2621.9	2604.8
175°	2625.6	2612.2	2616.1	2629.3	2610.5
177.5°	2629.3	2616.1	2618.1	2631.4	2614.2
180°	2619.9	2619.9	2619.9	2619.9	2619.9

TEST NUMBER: P911177

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US850-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.27	9.02	9.33	10.08	11.54	7.83	8.58	8.89	9.65	11.10
	3H	9.91	10.58	10.99	11.66	13.13	9.43	10.10	10.50	11.18	12.65
	4H	10.49	11.13	11.58	12.21	13.68	10.00	10.64	11.09	11.72	13.20
	6H	10.88	11.47	11.97	12.55	14.04	10.39	10.98	11.48	12.06	13.55
	8H	10.98	11.54	12.08	12.64	14.12	10.49	11.05	11.59	12.14	13.63
	12H	11.02	11.55	12.12	12.64	14.15	10.52	11.05	11.63	12.15	13.65
4H	2H	8.71	9.35	9.80	10.43	11.90	8.36	9.00	9.45	10.08	11.55
	3H	10.56	11.09	11.66	12.20	13.69	10.16	10.69	11.26	11.79	13.28
	4H	11.26	11.75	12.37	12.85	14.36	10.85	11.34	11.95	12.43	13.94
	6H	11.77	12.19	12.88	13.30	14.81	11.34	11.76	12.46	12.88	14.39
	8H	11.91	12.30	13.02	13.41	14.93	11.48	11.88	12.60	12.99	14.51
	12H	11.98	12.33	13.10	13.45	14.98	11.54	11.89	12.67	13.02	14.54
8H	4H	11.45	11.84	12.56	12.95	14.47	11.08	11.47	12.19	12.58	14.10
	6H	12.07	12.39	13.20	13.54	15.06	11.69	12.01	12.82	13.17	14.68
	8H	12.28	12.56	13.42	13.70	15.23	11.90	12.18	13.04	13.31	14.85
	12H	12.40	12.65	13.55	13.78	15.35	12.00	12.25	13.15	13.38	14.96
12H	4H	11.43	11.78	12.56	12.90	14.43	11.06	11.42	12.19	12.54	14.07
	6H	12.09	12.38	13.23	13.51	15.05	11.73	12.01	12.87	13.15	14.68
	8H	12.32	12.57	13.47	13.70	15.28	11.95	12.20	13.10	13.33	14.91

END OF REPORT