

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911260

Luminaire Tested: DFN2DIP-PN3F0-070D070US850-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P911260  
REPORT IS A COMBINATION OF REPORTS P899575 AND P896399  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN3F0-070D070US850-FLLFLL  
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 14555.7 lumens  
Efficiency: N/A  
Efficacy: 117.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 123.8  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.946  
Total Harmonic Distortion (THDi): 0.132  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P911260  
CATALOG NUMBER: DFN2DIP-PN3F0-070D070US850-FLLFL

### Luminous Intensity Polar Plot

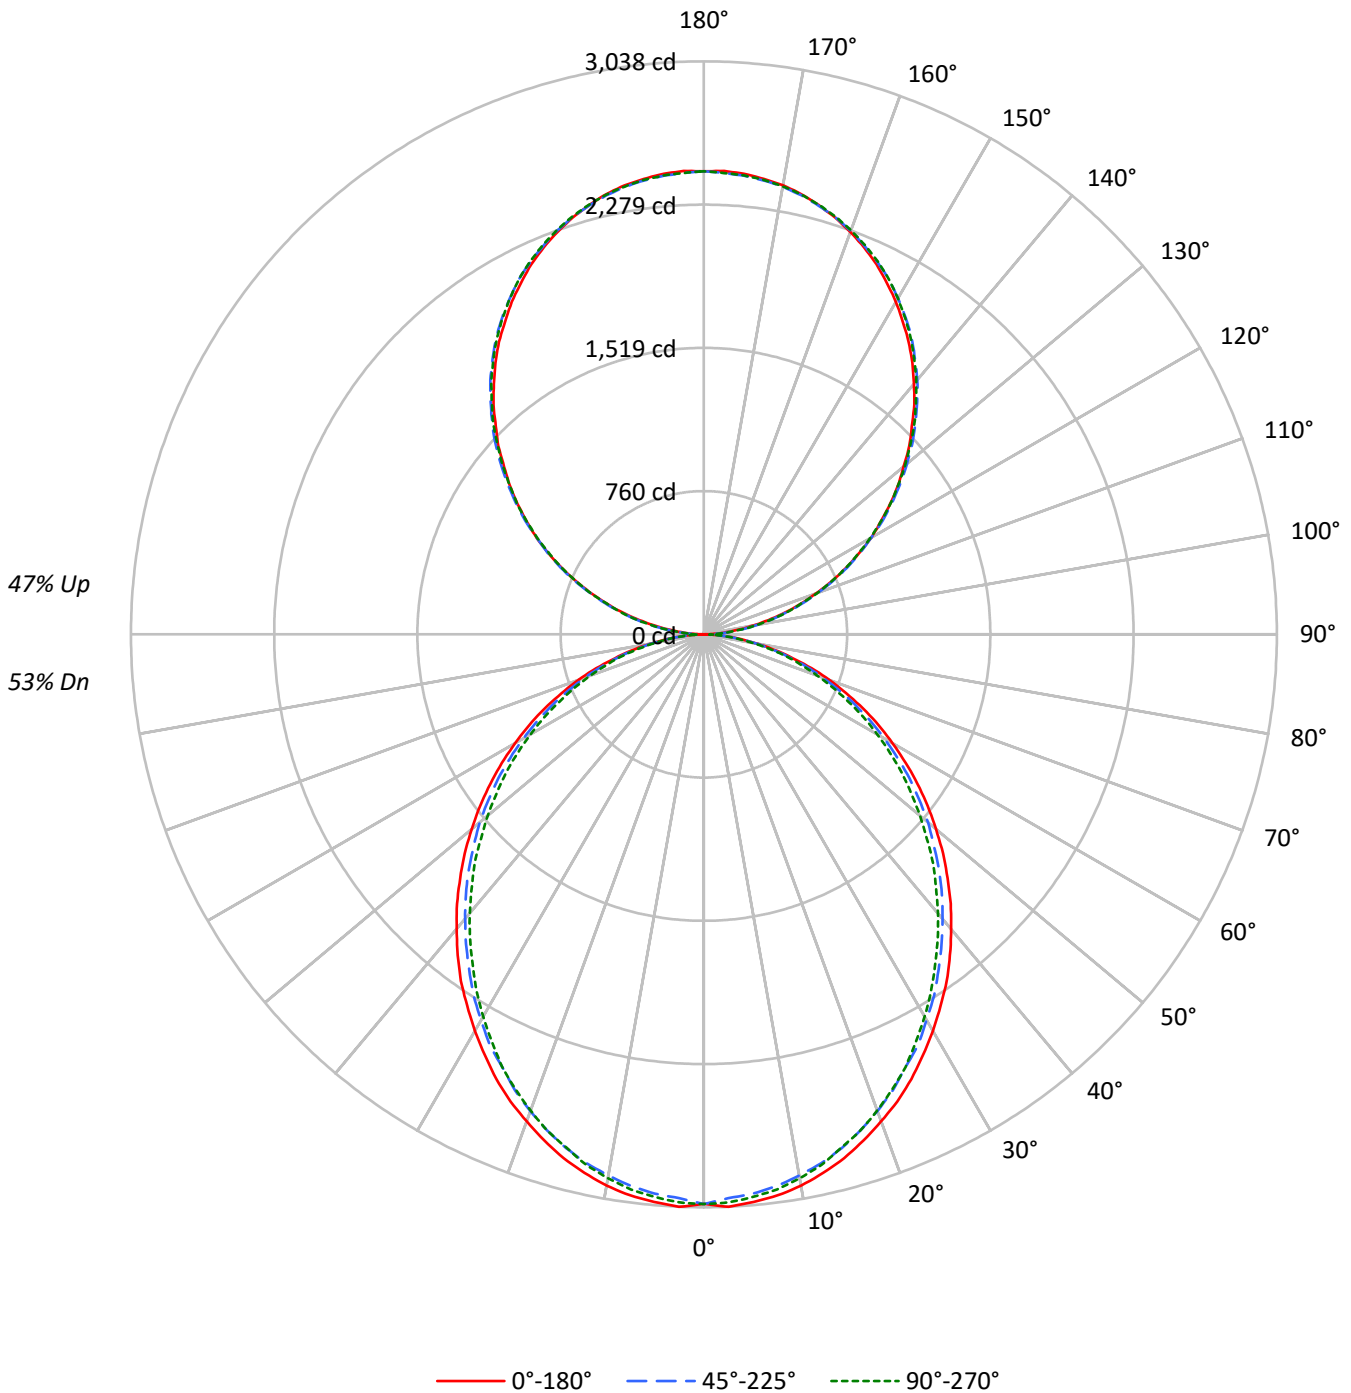



TEST NUMBER: P911260

CATALOG NUMBER: DFN2DIP-PN3F0-070D070US850-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	59	59	59	53
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	46	44	42	37
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	30	26	24	21
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21	27	24	21	18
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	21	18	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3531	3531	3531
5°	3535	3479	3504
10°	3504	3430	3455
15°	3450	3371	3379
20°	3378	3290	3302
25°	3307	3194	3213
30°	3218	3104	3100
35°	3134	2999	2980
40°	3030	2892	2866
45°	2926	2785	2750
50°	2813	2672	2615
55°	2694	2542	2491
60°	2560	2388	2348
65°	2413	2228	2180
70°	2226	2032	1999
75°	1967	1798	1829
80°	1655	1500	1509
85°	1167	993	984

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2926 cd/sqm



TEST NUMBER: P911260

CATALOG NUMBER: DFN2DIP-PN3F0-070D070US850-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	284.3	2.0
10°-20°	799.9	5.5
20°-30°	1175.6	8.1
30°-40°	1365.3	9.4
40°-50°	1363.6	9.4
50°-60°	1189.1	8.2
60°-70°	879.0	6.0
70°-80°	497.3	3.4
80°-90°	138.2	0.9
90°-100°	151.9	1.0
100°-110°	482.7	3.3
110°-120°	826.1	5.7
120°-130°	1086.4	7.5
130°-140°	1219.5	8.4
140°-150°	1195.8	8.2
150°-160°	1003.1	6.9
160°-170°	665.3	4.6
170°-180°	232.5	1.6
0°-30°	2259.8	15.5
0°-40°	3625.1	24.9
0°-60°	6177.8	42.4
0°-90°	7692.3	52.8
90°-120°	1460.7	10.0
90°-150°	4962.4	34.1
90°-180°	6863.0	47.2
0°-180°	14555.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3021	3021	3021	3021	3021	
5°	3021	3009	2977	3000	2995	287
15°	2876	2858	2820	2832	2818	810
25°	2602	2579	2530	2536	2530	1198
35°	2245	2216	2170	2152	2138	1402
45°	1827	1807	1763	1731	1720	1410
55°	1383	1365	1330	1296	1281	1236
65°	933	915	886	860	845	922
75°	488	482	467	450	456	521
85°	119	116	114	104	102	133
90°	2	27	72	68	70	14
95°	108	129	132	132	129	120
105°	446	452	456	460	460	470
115°	829	841	837	835	829	820
125°	1206	1224	1218	1212	1210	1077
135°	1560	1582	1587	1585	1579	1205
145°	1893	1908	1920	1922	1914	1183
155°	2165	2171	2178	2188	2181	997
165°	2355	2353	2353	2368	2357	664
175°	2451	2445	2440	2455	2443	233
180°	2455	2455	2455	2455	2455	



TEST NUMBER: P911260

CATALOG NUMBER: DFN2DIP-PN3F0-070D070US850-FLLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	3020.6	3020.6	3020.6	3020.6	3020.6
2.5°	3038.2	3023.7	2991.6	3020.6	3015.0
5°	3020.6	3009.3	2977.2	3000.3	2994.7
7.5°	3000.3	2983.0	2950.9	2974.4	2968.6
10°	2968.6	2948.2	2913.3	2936.5	2927.9
12.5°	2924.8	2907.6	2872.8	2887.2	2881.3
15°	2875.5	2858.2	2820.3	2832.1	2817.5
17.5°	2814.4	2797.2	2759.3	2773.8	2759.3
20°	2747.5	2730.4	2689.7	2698.3	2686.9
22.5°	2681.0	2654.8	2616.9	2616.9	2611.0
25°	2602.5	2579.3	2530.1	2535.6	2530.1
27.5°	2515.2	2494.9	2457.3	2448.7	2434.1
30°	2428.4	2404.9	2361.5	2352.9	2341.1
32.5°	2335.2	2318.0	2271.5	2253.9	2242.2
35°	2245.3	2216.3	2169.8	2152.2	2137.7
37.5°	2143.6	2117.4	2070.8	2050.5	2036.0
40°	2039.1	2015.7	1969.1	1943.3	1931.5
42.5°	1937.4	1914.0	1867.8	1838.5	1821.2
45°	1827.1	1806.8	1763.0	1731.3	1719.5
47.5°	1719.5	1699.2	1652.6	1620.6	1603.4
50°	1606.2	1591.6	1550.9	1510.3	1495.8
52.5°	1495.8	1475.5	1437.9	1405.9	1385.5
55°	1382.7	1365.2	1330.4	1295.5	1281.0
57.5°	1269.4	1254.8	1216.9	1182.1	1170.4
60°	1155.9	1144.5	1103.9	1071.8	1063.2
62.5°	1045.6	1025.3	996.3	967.4	955.6
65°	932.6	914.9	886.0	859.8	845.3
67.5°	816.3	801.6	775.6	755.3	743.6
70°	708.8	697.1	670.8	650.5	639.1
72.5°	598.4	586.8	572.2	551.9	543.3
75°	487.8	482.3	467.4	450.3	456.1
77.5°	389.3	377.5	371.6	363.0	354.4
80°	290.6	287.6	281.7	273.0	267.2
82.5°	197.5	197.5	194.7	183.1	183.1
85°	119.0	116.2	113.5	104.5	101.7
87.5°	52.3	46.6	40.7	32.1	28.9
90°	2.2	26.6	72.5	68.1	70.3
92.5°	45.9	62.2	64.4	66.7	66.7
95°	108.0	128.8	132.5	132.5	128.8
97.5°	179.9	199.1	207.3	207.3	207.3
100°	262.7	279.8	285.7	285.7	283.5
102.5°	350.1	362.6	370.8	373.1	370.8
105°	445.6	451.5	455.9	459.7	459.7
107.5°	540.3	549.2	549.2	550.7	540.3
110°	632.1	644.0	644.0	644.0	638.0



TEST NUMBER: P911260

CATALOG NUMBER: DFN2DIP-PN3F0-070D070US850-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	731.3	743.9	741.7	735.7	731.3
115°	829.0	840.8	837.2	835.0	829.0
117.5°	925.9	942.2	931.9	925.9	920.0
120°	1023.6	1039.9	1023.6	1023.6	1017.0
122.5°	1112.4	1133.2	1122.9	1116.9	1112.4
125°	1205.7	1224.2	1218.3	1211.7	1209.5
127.5°	1296.8	1319.7	1311.6	1302.7	1296.8
130°	1381.9	1408.5	1404.9	1400.4	1392.2
132.5°	1477.4	1498.1	1499.6	1489.3	1483.3
135°	1559.6	1582.4	1587.0	1584.7	1578.8
137.5°	1651.3	1669.8	1673.5	1672.0	1663.2
140°	1732.0	1750.6	1760.9	1760.9	1752.8
142.5°	1814.9	1833.4	1839.3	1841.5	1833.4
145°	1893.4	1908.1	1920.0	1922.2	1914.1
147.5°	1963.7	1982.2	1991.1	1994.8	1986.7
150°	2036.2	2048.8	2057.0	2063.6	2057.0
152.5°	2100.6	2113.2	2123.5	2131.7	2123.5
155°	2165.0	2170.9	2177.6	2187.9	2181.3
157.5°	2220.6	2225.0	2228.6	2243.5	2233.1
160°	2270.1	2274.6	2276.8	2289.3	2280.4
162.5°	2316.0	2316.0	2318.3	2332.2	2321.9
165°	2355.2	2353.0	2353.0	2367.8	2357.4
167.5°	2390.8	2384.1	2384.1	2398.9	2388.6
170°	2417.4	2411.5	2409.3	2424.1	2411.5
172.5°	2435.9	2429.9	2427.7	2442.6	2429.9
175°	2450.7	2444.8	2440.4	2455.1	2442.6
177.5°	2458.9	2452.9	2448.5	2461.1	2448.5
180°	2455.1	2455.1	2455.1	2455.1	2455.1



TEST NUMBER: P911260  
 CATALOG NUMBER: DFN2DIP-PN3F0-070D070US850-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.87	12.76	12.81	13.71	14.94	11.44	12.32	12.37	13.27	14.50
	3H	13.53	14.33	14.47	15.29	16.54	13.05	13.84	13.99	14.80	16.06
	4H	14.12	14.87	15.07	15.83	17.09	13.63	14.38	14.59	15.35	16.61
	6H	14.51	15.21	15.48	16.18	17.45	14.02	14.72	14.99	15.69	16.96
	8H	14.62	15.28	15.59	16.26	17.54	14.13	14.79	15.10	15.77	17.04
	12H	14.66	15.29	15.64	16.27	17.57	14.17	14.79	15.15	15.77	17.07
4H	2H	12.34	13.09	13.30	14.05	15.31	11.98	12.74	12.95	13.70	14.96
	3H	14.20	14.83	15.17	15.82	17.09	13.79	14.42	14.77	15.42	16.69
	4H	14.91	15.48	15.89	16.47	17.77	14.49	15.07	15.47	16.05	17.35
	6H	15.42	15.91	16.41	16.92	18.22	15.00	15.49	15.99	16.50	17.80
	8H	15.57	16.03	16.56	17.03	18.34	15.14	15.60	16.13	16.60	17.92
	12H	15.64	16.05	16.65	17.07	18.39	15.20	15.62	16.21	16.64	17.96
8H	4H	15.10	15.56	16.10	16.57	17.88	14.73	15.19	15.73	16.20	17.51
	6H	15.73	16.11	16.75	17.15	18.47	15.35	15.73	16.37	16.78	18.09
	8H	15.94	16.28	16.97	17.31	18.64	15.56	15.90	16.59	16.93	18.26
	12H	16.07	16.37	17.11	17.40	18.77	15.67	15.97	16.71	17.00	18.37
12H	4H	15.09	15.51	16.10	16.53	17.84	14.73	15.14	15.74	16.16	17.48
	6H	15.75	16.09	16.78	17.12	18.45	15.39	15.73	16.42	16.76	18.09
	8H	15.99	16.29	17.03	17.32	18.69	15.62	15.92	16.66	16.95	18.32