

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P913907

Luminaire Tested: DFN2DIP-PN3F0-040D070US927-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P913907
REPORT IS A COMBINATION OF REPORTS P901090 AND P897955
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-040D070US927-RLLONL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8183.2 lumens
Efficiency: N/A
Efficacy: 91.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 89
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9972
Total Harmonic Distortion (THDi): 0.128
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P913907

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US927-RLLONL

Luminous Intensity Polar Plot

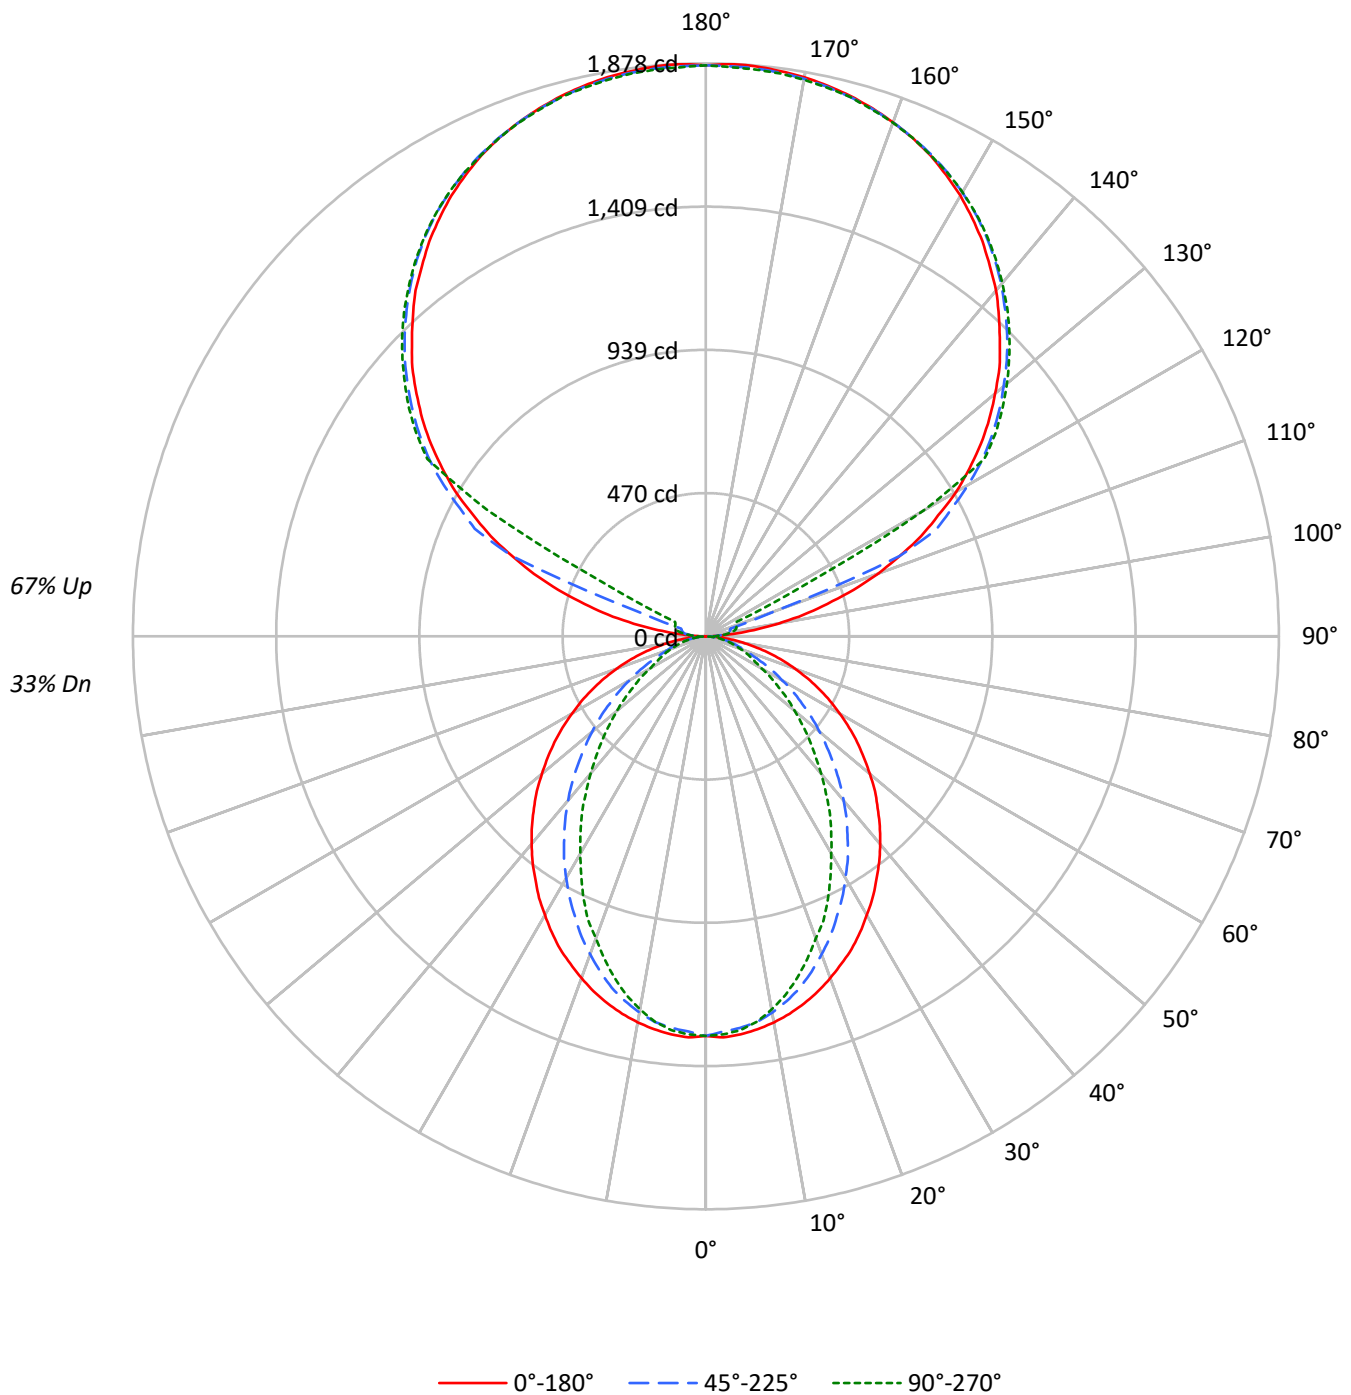

TEST NUMBER: P913907

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	87	83	85	81	78	76	65	63	61	50	49	48	36	35	35
2	86	79	73	68	77	72	67	62	57	54	51	44	42	40	32	31	30
3	79	70	63	57	71	63	57	53	51	47	43	39	37	34	29	27	26
4	72	62	54	49	65	56	50	45	45	41	37	35	32	30	26	24	22
5	66	55	47	42	59	50	43	38	41	36	32	32	28	26	24	21	20
6	61	49	42	36	55	45	38	33	37	32	28	29	25	23	21	19	17
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	20	17	16
8	52	41	33	28	47	37	31	26	30	25	22	24	21	18	18	16	14
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13
10	45	34	27	22	41	31	25	21	26	21	18	20	17	15	16	13	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1531	1531	1531
5°	1532	1505	1516
10°	1516	1475	1466
15°	1495	1425	1389
20°	1466	1357	1295
25°	1437	1281	1204
30°	1398	1203	1089
35°	1360	1119	988
40°	1321	1032	872
45°	1276	936	768
50°	1229	839	665
55°	1180	736	567
60°	1123	628	466
65°	1058	519	419
70°	979	416	378
75°	879	365	343
80°	735	302	295
85°	499	197	218

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1276 cd/sqm

TEST NUMBER: P913907

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.7	1.5
10°-20°	336.9	4.1
20°-30°	473.1	5.8
30°-40°	515.7	6.3
40°-50°	473.9	5.8
50°-60°	372.2	4.5
60°-70°	242.3	3.0
70°-80°	124.7	1.5
80°-90°	35.1	0.4
90°-100°	61.7	0.8
100°-110°	230.0	2.8
110°-120°	610.1	7.5
120°-130°	1011.9	12.4
130°-140°	1074.9	13.1
140°-150°	999.0	12.2
150°-160°	803.2	9.8
160°-170°	517.5	6.3
170°-180°	178.1	2.2
0°-30°	932.7	11.4
0°-40°	1448.4	17.7
0°-60°	2294.6	28.0
0°-90°	2696.7	33.0
90°-120°	901.9	11.0
90°-150°	3987.7	48.7
90°-180°	5487.0	67.1
0°-180°	8183.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1310	1310	1310	1310	1310	
5°	1310	1304	1288	1299	1296	124
15°	1246	1233	1192	1170	1158	351
25°	1131	1093	1014	966	948	520
35°	974	914	810	735	709	610
45°	796	717	593	508	480	615
55°	606	513	385	314	292	541
65°	409	313	206	166	162	405
75°	218	135	95	86	85	231
85°	51	26	22	22	22	58
90°	1	16	27	34	36	8
95°	88	43	53	60	58	104
105°	412	452	83	97	103	440
115°	779	802	836	209	111	767
125°	1101	1119	1144	1154	1158	982
135°	1362	1384	1396	1410	1407	1052
145°	1580	1579	1602	1612	1605	988
155°	1740	1728	1744	1752	1742	802
165°	1834	1826	1830	1839	1830	518
175°	1876	1866	1869	1878	1865	178
180°	1871	1871	1871	1871	1871	

TEST NUMBER: P913907

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1309.6	1309.6	1309.6	1309.6	1309.6
2.5°	1315.6	1309.6	1296.6	1308.5	1306.1
5°	1309.6	1303.7	1288.2	1298.9	1295.5
7.5°	1298.9	1291.9	1275.3	1279.9	1274.1
10°	1284.8	1276.4	1252.8	1249.1	1242.1
12.5°	1267.0	1256.3	1224.2	1217.2	1204.1
15°	1245.6	1232.6	1192.3	1169.8	1158.0
17.5°	1220.8	1201.7	1151.9	1125.9	1106.9
20°	1192.3	1168.5	1109.3	1079.7	1053.6
22.5°	1161.5	1134.2	1065.4	1025.2	1007.5
25°	1130.7	1092.7	1014.5	966.0	948.1
27.5°	1094.0	1053.6	967.1	911.4	884.1
30°	1054.9	1009.7	914.9	854.5	822.5
32.5°	1016.9	962.3	865.2	794.1	764.4
35°	974.3	913.8	809.5	734.8	708.7
37.5°	932.8	867.5	757.3	675.5	645.9
40°	888.9	817.8	702.8	618.7	587.9
42.5°	843.8	768.0	648.3	560.5	531.0
45°	796.5	717.0	592.6	508.4	480.0
47.5°	751.5	667.3	539.3	455.1	429.0
50°	701.6	617.5	487.1	405.3	380.5
52.5°	653.0	564.1	437.4	359.1	336.6
55°	605.6	513.2	385.2	314.1	291.6
57.5°	557.1	462.2	339.0	272.6	253.7
60°	507.2	412.4	290.3	230.0	211.0
62.5°	458.8	363.9	248.8	192.0	182.6
65°	408.9	312.8	206.2	166.0	162.3
67.5°	361.6	265.5	166.0	145.8	142.2
70°	311.7	219.3	137.4	125.6	120.8
72.5°	264.4	176.6	114.9	105.5	103.1
75°	218.0	135.1	94.8	86.5	85.4
77.5°	171.9	95.9	74.7	69.9	67.5
80°	129.1	68.8	56.8	52.2	52.2
82.5°	90.1	46.3	39.1	36.7	36.7
85°	50.9	26.1	22.5	22.5	22.5
87.5°	19.0	9.4	9.4	8.3	8.3
90°	1.3	16.2	27.0	33.9	36.5
92.5°	33.9	28.4	32.5	35.3	36.5
95°	87.9	43.3	52.8	59.7	58.2
97.5°	158.4	47.5	69.0	73.2	74.5
100°	239.8	54.2	77.2	87.9	90.7
102.5°	329.0	326.5	79.9	94.7	98.9
105°	411.7	452.3	82.6	97.4	102.9
107.5°	507.8	541.6	85.4	100.2	105.7
110°	600.0	628.3	237.0	101.6	106.9

TEST NUMBER: P913907

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	686.7	710.9	687.9	104.2	108.4
115°	778.6	801.6	835.5	208.6	111.1
117.5°	858.6	885.6	908.7	714.9	360.2
120°	947.9	968.2	992.7	1008.9	826.1
122.5°	1023.7	1045.4	1072.6	1080.6	1082.0
125°	1100.9	1118.6	1144.3	1153.8	1157.8
127.5°	1171.3	1190.3	1210.7	1224.2	1225.5
130°	1237.7	1259.4	1274.2	1289.2	1287.9
132.5°	1305.4	1323.1	1337.9	1350.1	1348.8
135°	1362.3	1384.0	1396.1	1409.8	1407.1
137.5°	1421.8	1438.1	1451.8	1465.3	1461.3
140°	1480.0	1491.0	1505.8	1518.0	1511.2
142.5°	1528.9	1538.4	1555.9	1566.7	1560.0
145°	1580.4	1579.0	1601.9	1611.5	1604.7
147.5°	1624.9	1621.0	1643.9	1650.7	1645.4
150°	1668.3	1658.9	1680.6	1688.6	1681.9
152.5°	1704.9	1694.1	1714.4	1722.5	1713.1
155°	1740.1	1728.0	1744.2	1752.3	1741.5
157.5°	1768.5	1757.8	1770.0	1779.5	1768.5
160°	1793.0	1784.8	1793.0	1801.0	1791.5
162.5°	1814.6	1806.5	1813.2	1822.7	1810.5
165°	1833.5	1825.5	1829.5	1839.0	1829.5
167.5°	1848.5	1840.2	1844.4	1853.9	1841.7
170°	1860.7	1852.5	1855.2	1864.7	1852.5
172.5°	1868.8	1860.7	1863.4	1872.9	1860.7
175°	1875.5	1866.0	1868.8	1878.2	1864.7
177.5°	1878.2	1868.8	1870.2	1879.7	1867.4
180°	1871.4	1871.4	1871.4	1871.4	1871.4

TEST NUMBER: P913907

CATALOG NUMBER: DFN2DIP-PN3F0-040D070US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.75	7.45	7.84	8.54	10.04	2.71	3.42	3.81	4.51	6.01
	3H	8.41	9.04	9.51	10.14	11.66	3.89	4.52	4.99	5.62	7.13
	4H	9.01	9.61	10.12	10.71	12.23	4.33	4.93	5.44	6.03	7.55
	6H	9.42	9.97	10.54	11.07	12.60	4.64	5.19	5.76	6.29	7.82
	8H	9.54	10.06	10.67	11.18	12.71	4.72	5.24	5.85	6.36	7.89
	12H	9.59	10.09	10.72	11.20	12.75	4.76	5.25	5.89	6.37	7.91
4H	2H	6.75	7.35	7.87	8.45	9.97	3.29	3.89	4.41	4.99	6.51
	3H	8.56	9.06	9.69	10.18	11.72	4.62	5.12	5.75	6.25	7.78
	4H	9.24	9.70	10.37	10.82	12.37	5.16	5.62	6.29	6.73	8.29
	6H	9.74	10.14	10.88	11.28	12.82	5.57	5.96	6.70	7.10	8.64
	8H	9.91	10.28	11.05	11.41	12.97	5.69	6.05	6.83	7.19	8.75
	12H	10.00	10.33	11.15	11.47	13.04	5.74	6.08	6.90	7.22	8.78
8H	4H	9.20	9.57	10.34	10.70	12.26	5.43	5.79	6.56	6.92	8.48
	6H	9.75	10.06	10.91	11.23	12.79	5.93	6.23	7.09	7.41	8.97
	8H	9.97	10.23	11.13	11.38	12.96	6.12	6.38	7.28	7.53	9.11
	12H	10.09	10.33	11.26	11.48	13.09	6.23	6.46	7.39	7.61	9.22
12H	4H	9.14	9.48	10.30	10.62	12.18	5.43	5.76	6.58	6.90	8.46
	6H	9.73	9.99	10.89	11.14	12.72	5.98	6.24	7.14	7.40	8.97
	8H	9.94	10.17	11.11	11.32	12.93	6.18	6.41	7.35	7.56	9.17

END OF REPORT