

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914051

Luminaire Tested: DFN2DIP-PN3F0-090D080US927-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914051
REPORT IS A COMBINATION OF REPORTS P901114 AND P897955
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-090D080US927-RLLONL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12334.2 lumens
Efficiency: N/A
Efficacy: 79.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 154.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9954
Total Harmonic Distortion (THDi): 0.076
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914051

CATALOG NUMBER: DFN2DIP-PN3F0-090D080US927-RLLONL

Luminous Intensity Polar Plot

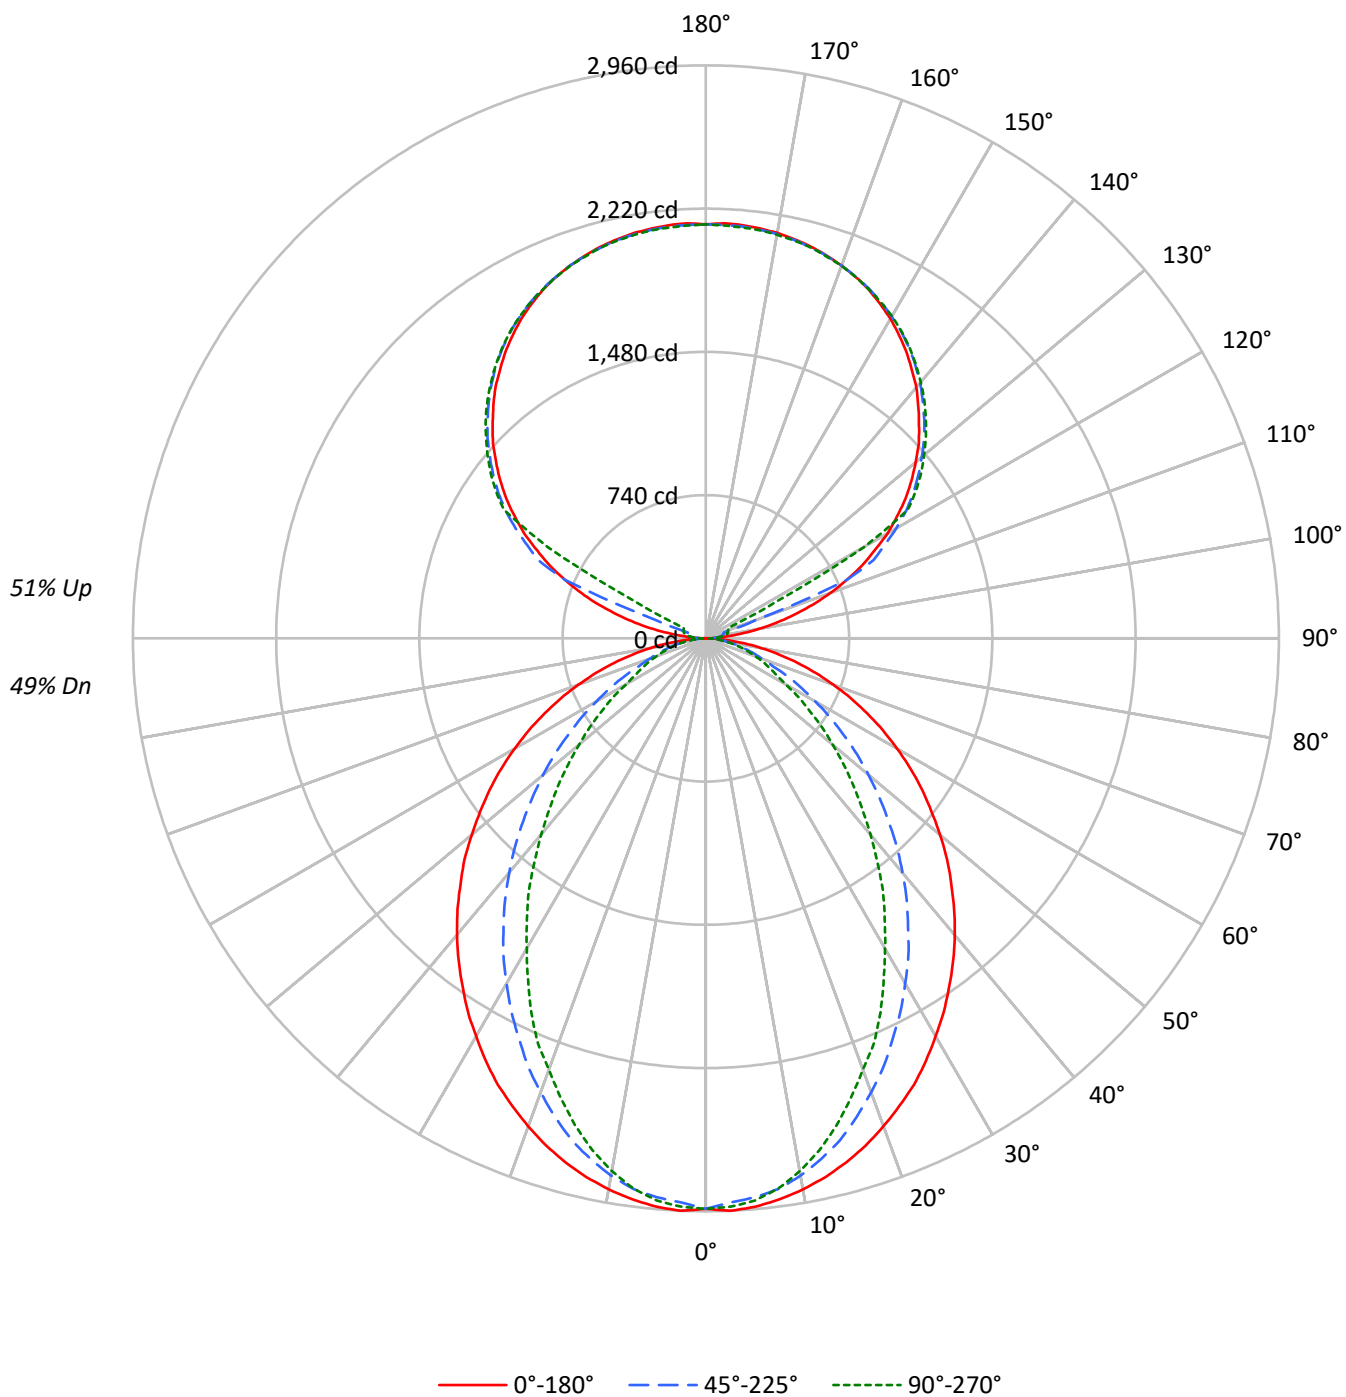

TEST NUMBER: P914051

CATALOG NUMBER: DFN2DIP-PN3F0-090D080US927-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	52	49	44	42	41
3	82	73	66	60	75	68	62	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	37	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	30	27
6	64	52	44	39	59	49	42	37	42	36	32	36	31	28	30	27	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	28	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3445	3445	3445
5°	3448	3388	3410
10°	3412	3319	3298
15°	3363	3207	3125
20°	3299	3053	2913
25°	3233	2882	2709
30°	3145	2706	2450
35°	3059	2517	2223
40°	2972	2322	1963
45°	2870	2106	1727
50°	2765	1888	1497
55°	2655	1656	1276
60°	2528	1413	1049
65°	2381	1167	942
70°	2203	937	850
75°	1979	821	770
80°	1655	681	663
85°	1123	443	490

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2870 cd/sqm

TEST NUMBER: P914051

CATALOG NUMBER: DFN2DIP-PN3F0-090D080US927-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.2	2.2
10°-20°	758.1	6.1
20°-30°	1064.4	8.6
30°-40°	1160.3	9.4
40°-50°	1066.4	8.6
50°-60°	837.5	6.8
60°-70°	545.1	4.4
70°-80°	280.6	2.3
80°-90°	75.4	0.6
90°-100°	70.5	0.6
100°-110°	262.9	2.1
110°-120°	697.3	5.7
120°-130°	1156.5	9.4
130°-140°	1228.4	10.0
140°-150°	1141.7	9.3
150°-160°	917.9	7.4
160°-170°	591.5	4.8
170°-180°	203.6	1.7
0°-30°	2098.7	17.0
0°-40°	3258.9	26.4
0°-60°	5162.8	41.9
0°-90°	6064.0	49.2
90°-120°	1030.7	8.4
90°-150°	4557.3	36.9
90°-180°	6270.0	50.8
0°-180°	12334.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2947	2947	2947	2947	2947	
5°	2947	2933	2899	2923	2915	279
15°	2803	2773	2683	2632	2606	790
25°	2544	2459	2283	2173	2133	1170
35°	2192	2056	1822	1653	1595	1372
45°	1792	1613	1333	1144	1080	1384
55°	1363	1155	867	707	656	1218
65°	920	704	464	373	365	912
75°	491	304	213	195	192	519
85°	114	58	51	51	51	132
90°	2	18	31	39	42	12
95°	100	49	60	68	66	119
105°	470	517	94	111	118	503
115°	890	916	955	238	127	876
125°	1258	1278	1308	1319	1323	1122
135°	1557	1582	1596	1611	1608	1203
145°	1806	1804	1831	1842	1834	1130
155°	1989	1975	1993	2003	1990	916
165°	2096	2086	2091	2102	2091	592
175°	2143	2133	2136	2146	2131	204
180°	2139	2139	2139	2139	2139	

TEST NUMBER: P914051

CATALOG NUMBER: DFN2DIP-PN3F0-090D080US927-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2946.7	2946.7	2946.7	2946.7	2946.7
2.5°	2960.0	2946.7	2917.2	2944.1	2938.8
5°	2946.7	2933.4	2898.6	2922.6	2914.7
7.5°	2922.6	2906.8	2869.4	2879.9	2866.6
10°	2890.7	2872.0	2818.8	2810.6	2794.7
12.5°	2850.7	2826.7	2754.6	2738.7	2709.3
15°	2802.7	2773.3	2682.7	2632.0	2605.5
17.5°	2746.7	2704.0	2591.9	2533.3	2490.6
20°	2682.7	2629.2	2495.9	2429.5	2370.6
22.5°	2613.4	2552.0	2397.2	2306.7	2266.8
25°	2544.1	2458.6	2282.7	2173.4	2133.3
27.5°	2461.5	2370.6	2176.0	2050.6	1989.2
30°	2373.5	2271.9	2058.6	1922.8	1850.6
32.5°	2288.0	2165.2	1946.8	1786.7	1719.9
35°	2192.1	2056.0	1821.5	1653.4	1594.6
37.5°	2098.7	1951.9	1704.1	1519.9	1453.4
40°	2000.0	1840.2	1581.3	1392.0	1322.7
42.5°	1898.7	1728.1	1458.7	1261.3	1194.8
45°	1792.1	1613.3	1333.4	1143.8	1079.9
47.5°	1690.8	1501.5	1213.5	1023.9	965.4
50°	1578.7	1389.4	1096.1	911.9	856.1
52.5°	1469.3	1269.2	984.0	808.0	757.4
55°	1362.6	1154.6	866.6	706.8	656.1
57.5°	1253.4	1040.1	762.8	613.4	570.7
60°	1141.3	928.0	653.3	517.5	474.8
62.5°	1032.1	818.8	559.9	432.1	410.8
65°	920.0	703.9	464.0	373.4	365.3
67.5°	813.4	597.2	373.4	327.9	320.0
70°	701.4	493.4	309.3	282.7	271.9
72.5°	594.7	397.2	258.6	237.3	232.0
75°	490.6	303.9	213.3	194.6	192.1
77.5°	386.7	215.9	168.0	157.3	151.9
80°	290.6	154.8	127.9	117.4	117.4
82.5°	202.6	104.1	88.0	82.6	82.6
85°	114.5	58.5	50.6	50.6	50.6
87.5°	42.7	21.2	21.2	18.7	18.7
90°	1.5	18.5	30.9	38.7	41.7
92.5°	38.7	32.6	37.2	40.2	41.7
95°	100.5	49.4	60.3	68.2	66.5
97.5°	181.0	54.2	78.8	83.7	85.1
100°	274.0	61.9	88.2	100.5	103.6
102.5°	376.0	373.0	91.3	108.2	113.0
105°	470.5	517.0	94.4	111.4	117.6
107.5°	580.4	618.9	97.6	114.5	120.7
110°	685.7	718.0	270.9	116.1	122.2

TEST NUMBER: P914051

CATALOG NUMBER: DFN2DIP-PN3F0-090D080US927-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	784.7	812.5	786.2	119.1	123.9
115°	889.9	916.2	954.9	238.4	127.0
117.5°	981.2	1012.1	1038.5	817.1	411.7
120°	1083.4	1106.5	1134.5	1153.0	944.0
122.5°	1169.9	1194.8	1225.8	1235.0	1236.7
125°	1258.1	1278.3	1307.7	1318.6	1323.2
127.5°	1338.6	1360.3	1383.7	1399.1	1400.6
130°	1414.5	1439.3	1456.3	1473.4	1471.9
132.5°	1491.9	1512.1	1529.1	1543.0	1541.5
135°	1557.0	1581.7	1595.5	1611.2	1608.0
137.5°	1625.0	1643.5	1659.1	1674.6	1670.0
140°	1691.5	1704.0	1720.9	1734.9	1727.1
142.5°	1747.4	1758.2	1778.2	1790.6	1782.8
145°	1806.2	1804.5	1830.8	1841.7	1833.9
147.5°	1857.1	1852.5	1878.7	1886.5	1880.4
150°	1906.7	1895.8	1920.6	1929.8	1922.1
152.5°	1948.4	1936.1	1959.2	1968.6	1957.8
155°	1988.7	1974.9	1993.4	2002.6	1990.4
157.5°	2021.2	2008.9	2022.8	2033.7	2021.2
160°	2049.1	2039.8	2049.1	2058.3	2047.5
162.5°	2073.8	2064.6	2072.3	2083.1	2069.2
165°	2095.5	2086.3	2090.9	2101.7	2090.9
167.5°	2112.5	2103.2	2107.9	2118.8	2104.8
170°	2126.5	2117.1	2120.3	2131.1	2117.1
172.5°	2135.7	2126.5	2129.6	2140.5	2126.5
175°	2143.4	2132.6	2135.7	2146.5	2131.1
177.5°	2146.5	2135.7	2137.3	2148.2	2134.2
180°	2138.8	2138.8	2138.8	2138.8	2138.8

TEST NUMBER: P914051

CATALOG NUMBER: DFN2DIP-PN3F0-090D080US927-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.33	12.15	12.30	13.13	14.42	7.29	8.12	8.26	9.10	10.38
	3H	13.00	13.73	13.98	14.72	16.03	8.47	9.21	9.46	10.20	11.51
	4H	13.60	14.30	14.60	15.29	16.61	8.92	9.62	9.92	10.61	11.93
	6H	14.02	14.66	15.02	15.66	16.99	9.24	9.88	10.24	10.87	12.20
	8H	14.14	14.75	15.15	15.77	17.09	9.32	9.93	10.34	10.95	12.27
	12H	14.20	14.78	15.22	15.79	17.14	9.36	9.94	10.38	10.95	12.30
4H	2H	11.34	12.04	12.34	13.03	14.35	7.88	8.58	8.89	9.57	10.89
	3H	13.16	13.74	14.17	14.76	16.09	9.23	9.81	10.24	10.83	12.16
	4H	13.85	14.38	14.87	15.39	16.75	9.77	10.30	10.79	11.31	12.67
	6H	14.36	14.81	15.39	15.85	17.20	10.18	10.64	11.21	11.67	13.02
	8H	14.53	14.96	15.56	15.99	17.35	10.31	10.73	11.34	11.76	13.13
	12H	14.62	15.01	15.67	16.05	17.42	10.37	10.75	11.42	11.80	13.17
8H	4H	13.82	14.24	14.85	15.27	16.64	10.05	10.47	11.07	11.50	12.86
	6H	14.38	14.73	15.43	15.80	17.16	10.56	10.90	11.61	11.98	13.34
	8H	14.59	14.90	15.65	15.95	17.34	10.74	11.05	11.80	12.11	13.49
	12H	14.72	14.99	15.79	16.05	17.47	10.85	11.13	11.92	12.18	13.60
12H	4H	13.77	14.15	14.82	15.20	16.57	10.05	10.43	11.10	11.48	12.85
	6H	14.35	14.66	15.41	15.72	17.10	10.60	10.91	11.66	11.97	13.35
	8H	14.57	14.84	15.63	15.89	17.31	10.81	11.08	11.87	12.13	13.55