

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916611

Luminaire Tested: DFN2DIP-PN3F0-030D080US930-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916611
REPORT IS A COMBINATION OF REPORTS P901102 AND P897955
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-030D080US930-RLLONL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8536.2 lumens
Efficiency: N/A
Efficacy: 100.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 85.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.099
Total Harmonic Distortion (THDi): 0.979
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916611

CATALOG NUMBER: DFN2DIP-PN3F0-030D080US930-RLLONL

Luminous Intensity Polar Plot

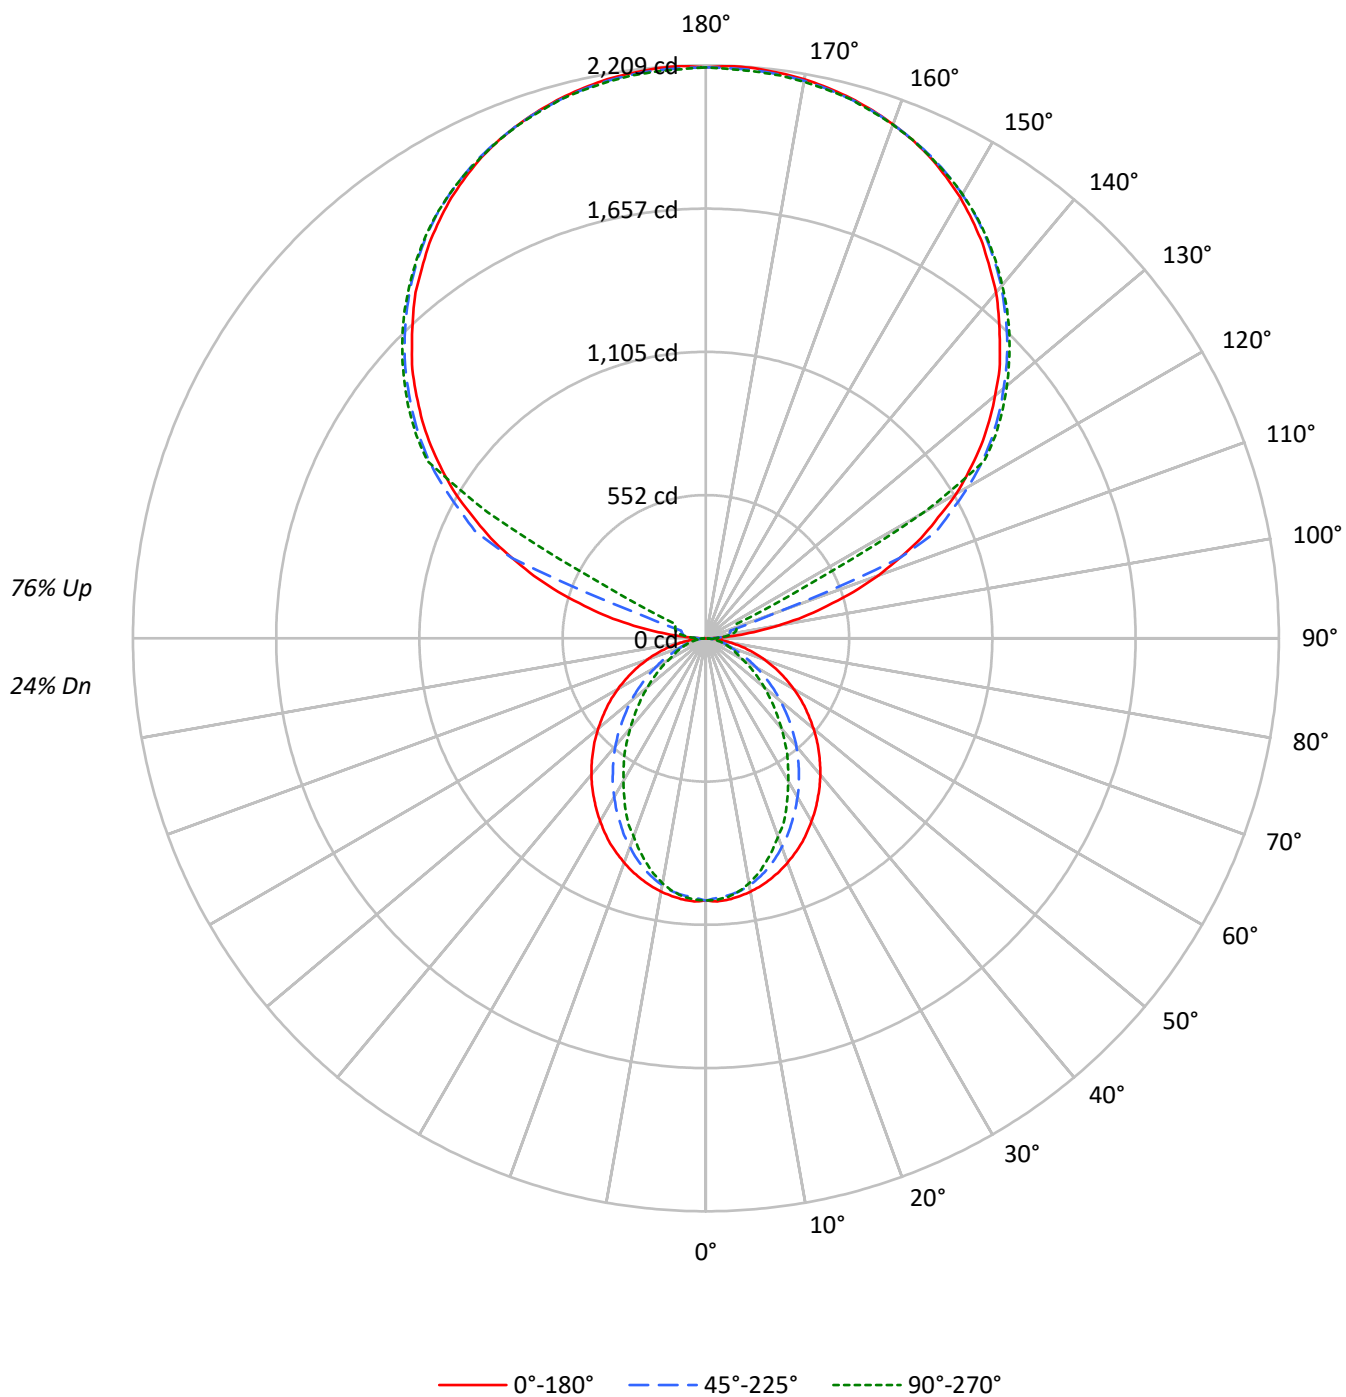

TEST NUMBER: P916611

CATALOG NUMBER: DFN2DIP-PN3F0-030D080US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33
1	92	88	85	81	82	79	76	73	61	59	57	44	43	42	29	28	28
2	84	77	71	67	75	69	64	60	53	50	47	39	37	35	26	25	24
3	77	68	61	56	68	61	55	50	47	43	40	35	32	30	23	22	21
4	70	60	53	47	62	54	48	43	42	38	34	31	28	26	21	19	18
5	65	54	46	40	57	48	42	37	38	33	30	28	25	23	19	17	16
6	59	48	40	35	53	43	37	32	34	29	26	25	22	20	17	15	14
7	55	43	36	30	49	39	32	28	31	26	23	23	20	17	16	14	12
8	51	39	32	27	45	35	29	25	28	23	20	21	18	16	14	13	11
9	47	36	29	24	42	32	26	22	25	21	18	19	16	14	13	11	10
10	44	33	26	21	39	29	23	19	23	19	16	18	15	13	12	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1182	1182	1182
5°	1183	1162	1170
10°	1170	1138	1131
15°	1154	1100	1072
20°	1132	1047	999
25°	1109	989	929
30°	1079	928	841
35°	1050	863	763
40°	1020	797	673
45°	985	723	592
50°	949	648	513
55°	911	568	438
60°	867	485	360
65°	817	400	323
70°	756	321	292
75°	679	282	264
80°	568	234	228
85°	386	152	168

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1487 cd/sqm

TEST NUMBER: P916611

CATALOG NUMBER: DFN2DIP-PN3F0-030D080US930-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.7	1.1
10°-20°	260.1	3.0
20°-30°	365.1	4.3
30°-40°	398.0	4.7
40°-50°	365.8	4.3
50°-60°	287.3	3.4
60°-70°	187.0	2.2
70°-80°	96.3	1.1
80°-90°	28.5	0.3
90°-100°	72.6	0.9
100°-110°	270.6	3.2
110°-120°	717.6	8.4
120°-130°	1190.2	13.9
130°-140°	1264.3	14.8
140°-150°	1175.0	13.8
150°-160°	944.7	11.1
160°-170°	608.7	7.1
170°-180°	209.5	2.5
0°-30°	720.0	8.4
0°-40°	1118.0	13.1
0°-60°	1771.2	20.7
0°-90°	2082.9	24.4
90°-120°	1060.8	12.4
90°-150°	4690.4	54.9
90°-180°	6453.0	75.6
0°-180°	8536.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1011	1011	1011	1011	1011	
5°	1011	1006	994	1003	1000	96
15°	962	951	920	903	894	271
25°	873	843	783	746	732	401
35°	752	705	625	567	547	471
45°	615	553	458	392	370	475
55°	467	396	297	242	225	418
65°	316	242	159	128	125	313
75°	168	104	73	67	66	178
85°	39	20	17	17	17	45
90°	2	19	32	40	43	8
95°	104	51	62	70	68	123
105°	484	532	97	115	121	517
115°	916	943	983	245	131	902
125°	1295	1316	1346	1357	1362	1155
135°	1602	1628	1642	1658	1655	1238
145°	1859	1857	1884	1895	1887	1163
155°	2047	2032	2052	2061	2048	943
165°	2157	2147	2152	2163	2152	609
175°	2206	2195	2198	2209	2193	210
180°	2201	2201	2201	2201	2201	

TEST NUMBER: P916611

CATALOG NUMBER: DFN2DIP-PN3F0-030D080US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1010.9	1010.9	1010.9	1010.9	1010.9
2.5°	1015.5	1010.9	1000.8	1010.0	1008.2
5°	1010.9	1006.3	994.4	1002.7	999.9
7.5°	1002.7	997.2	984.4	988.0	983.4
10°	991.6	985.3	967.0	964.2	958.8
12.5°	978.0	969.7	945.0	939.5	929.4
15°	961.5	951.4	920.3	902.9	893.8
17.5°	942.2	927.6	889.2	869.1	854.4
20°	920.3	902.0	856.2	833.5	813.3
22.5°	896.6	875.5	822.4	791.3	777.6
25°	872.8	843.4	783.1	745.6	731.8
27.5°	844.4	813.3	746.5	703.5	682.4
30°	814.2	779.4	706.2	659.7	634.9
32.5°	784.9	742.8	667.9	612.9	590.0
35°	752.0	705.3	624.8	567.2	547.1
37.5°	720.0	669.6	584.6	521.4	498.6
40°	686.2	631.3	542.5	477.5	453.8
42.5°	651.3	592.9	500.4	432.7	409.9
45°	614.8	553.4	457.5	392.4	370.5
47.5°	580.0	515.1	416.3	351.2	331.2
50°	541.6	476.6	376.0	312.8	293.7
52.5°	504.0	435.5	337.6	277.2	259.8
55°	467.4	396.1	297.3	242.5	225.1
57.5°	430.0	356.8	261.7	210.4	195.8
60°	391.5	318.4	224.1	177.5	162.9
62.5°	354.1	280.9	192.1	148.2	141.0
65°	315.6	241.5	159.1	128.1	125.3
67.5°	279.1	204.9	128.1	112.5	109.7
70°	240.6	169.3	106.1	96.9	93.3
72.5°	204.0	136.2	88.7	81.4	79.6
75°	168.3	104.3	73.2	66.8	65.9
77.5°	132.6	74.0	57.6	54.0	52.1
80°	99.7	53.1	43.9	40.3	40.3
82.5°	69.5	35.7	30.2	28.4	28.4
85°	39.3	20.1	17.4	17.4	17.4
87.5°	14.7	7.3	7.3	6.4	6.4
90°	1.5	19.1	31.8	39.9	43.0
92.5°	39.9	33.5	38.2	41.4	43.0
95°	103.5	50.9	62.0	70.2	68.5
97.5°	186.3	55.8	81.1	86.1	87.6
100°	282.0	63.8	90.8	103.5	106.6
102.5°	387.0	383.9	94.0	111.4	116.3
105°	484.2	532.1	97.2	114.6	121.1
107.5°	597.3	637.0	100.4	117.8	124.3
110°	705.7	739.0	278.8	119.5	125.8

TEST NUMBER: P916611

CATALOG NUMBER: DFN2DIP-PN3F0-030D080US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	807.6	836.2	809.2	122.5	127.5
115°	915.8	942.9	982.8	245.3	130.7
117.5°	1009.8	1041.6	1068.9	840.9	423.7
120°	1115.0	1138.8	1167.6	1186.7	971.6
122.5°	1204.0	1229.6	1261.6	1271.0	1272.8
125°	1294.9	1315.6	1345.9	1357.1	1361.8
127.5°	1377.7	1400.0	1424.1	1439.9	1441.4
130°	1455.8	1481.3	1498.8	1516.4	1514.8
132.5°	1535.5	1556.2	1573.7	1588.0	1586.5
135°	1602.4	1627.9	1642.1	1658.2	1655.0
137.5°	1672.4	1691.5	1707.6	1723.5	1718.7
140°	1740.8	1753.7	1771.2	1785.5	1777.5
142.5°	1798.4	1809.5	1830.1	1842.8	1834.8
145°	1858.9	1857.2	1884.2	1895.4	1887.4
147.5°	1911.3	1906.6	1933.6	1941.6	1935.3
150°	1962.3	1951.2	1976.7	1986.1	1978.2
152.5°	2005.3	1992.6	2016.4	2026.1	2014.9
155°	2046.7	2032.5	2051.6	2061.1	2048.4
157.5°	2080.2	2067.5	2081.9	2093.0	2080.2
160°	2108.9	2099.3	2108.9	2118.4	2107.2
162.5°	2134.3	2124.8	2132.7	2143.9	2129.6
165°	2156.6	2147.2	2151.9	2163.0	2151.9
167.5°	2174.2	2164.5	2169.4	2180.6	2166.2
170°	2188.6	2178.9	2182.1	2193.3	2178.9
172.5°	2198.0	2188.6	2191.8	2202.9	2188.6
175°	2206.0	2194.8	2198.0	2209.1	2193.3
177.5°	2209.1	2198.0	2199.7	2210.8	2196.5
180°	2201.2	2201.2	2201.2	2201.2	2201.2

TEST NUMBER: P916611

CATALOG NUMBER: DFN2DIP-PN3F0-030D080US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.62	5.28	5.77	6.42	8.01	0.59	1.24	1.74	2.38	3.98
	3H	6.28	6.87	7.44	8.01	9.62	1.75	2.34	2.92	3.49	5.10
	4H	6.87	7.43	8.04	8.58	10.20	2.19	2.75	3.36	3.90	5.51
	6H	7.28	7.80	8.46	8.94	10.57	2.50	3.01	3.68	4.16	5.79
	8H	7.40	7.89	8.58	9.05	10.67	2.58	3.07	3.76	4.23	5.85
	12H	7.45	7.92	8.64	9.07	10.72	2.62	3.08	3.80	4.24	5.88
4H	2H	4.61	5.17	5.79	6.32	7.94	1.16	1.71	2.33	2.86	4.48
	3H	6.42	6.89	7.60	8.06	9.69	2.48	2.95	3.66	4.12	5.75
	4H	7.10	7.53	8.29	8.69	10.34	3.02	3.45	4.20	4.61	6.25
	6H	7.60	7.97	8.79	9.15	10.79	3.42	3.79	4.61	4.97	6.61
	8H	7.77	8.11	8.96	9.29	10.94	3.55	3.89	4.73	5.06	6.71
	12H	7.85	8.16	9.06	9.35	11.01	3.60	3.91	4.80	5.09	6.75
8H	4H	7.06	7.40	8.24	8.57	10.22	3.28	3.62	4.47	4.80	6.45
	6H	7.61	7.89	8.81	9.11	10.76	3.79	4.07	4.99	5.29	6.93
	8H	7.82	8.06	9.03	9.26	10.93	3.97	4.22	5.18	5.41	7.08
	12H	7.95	8.16	9.16	9.35	11.05	4.08	4.30	5.29	5.49	7.19
12H	4H	7.00	7.31	8.20	8.49	10.15	3.28	3.59	4.48	4.77	6.43
	6H	7.58	7.83	8.79	9.02	10.69	3.83	4.08	5.04	5.27	6.94
	8H	7.79	8.01	9.00	9.20	10.90	4.03	4.25	5.25	5.44	7.14

END OF REPORT