

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916650

Luminaire Tested: DFN2DIP-PN3F0-050D040US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916650
REPORT IS A COMBINATION OF REPORTS P899530 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-050D040US930-RLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6351.1 lumens
Efficiency: N/A
Efficacy: 84.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 75
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916650
CATALOG NUMBER: DFN2DIP-PN3F0-050D040US930-RLLFLL

Luminous Intensity Polar Plot

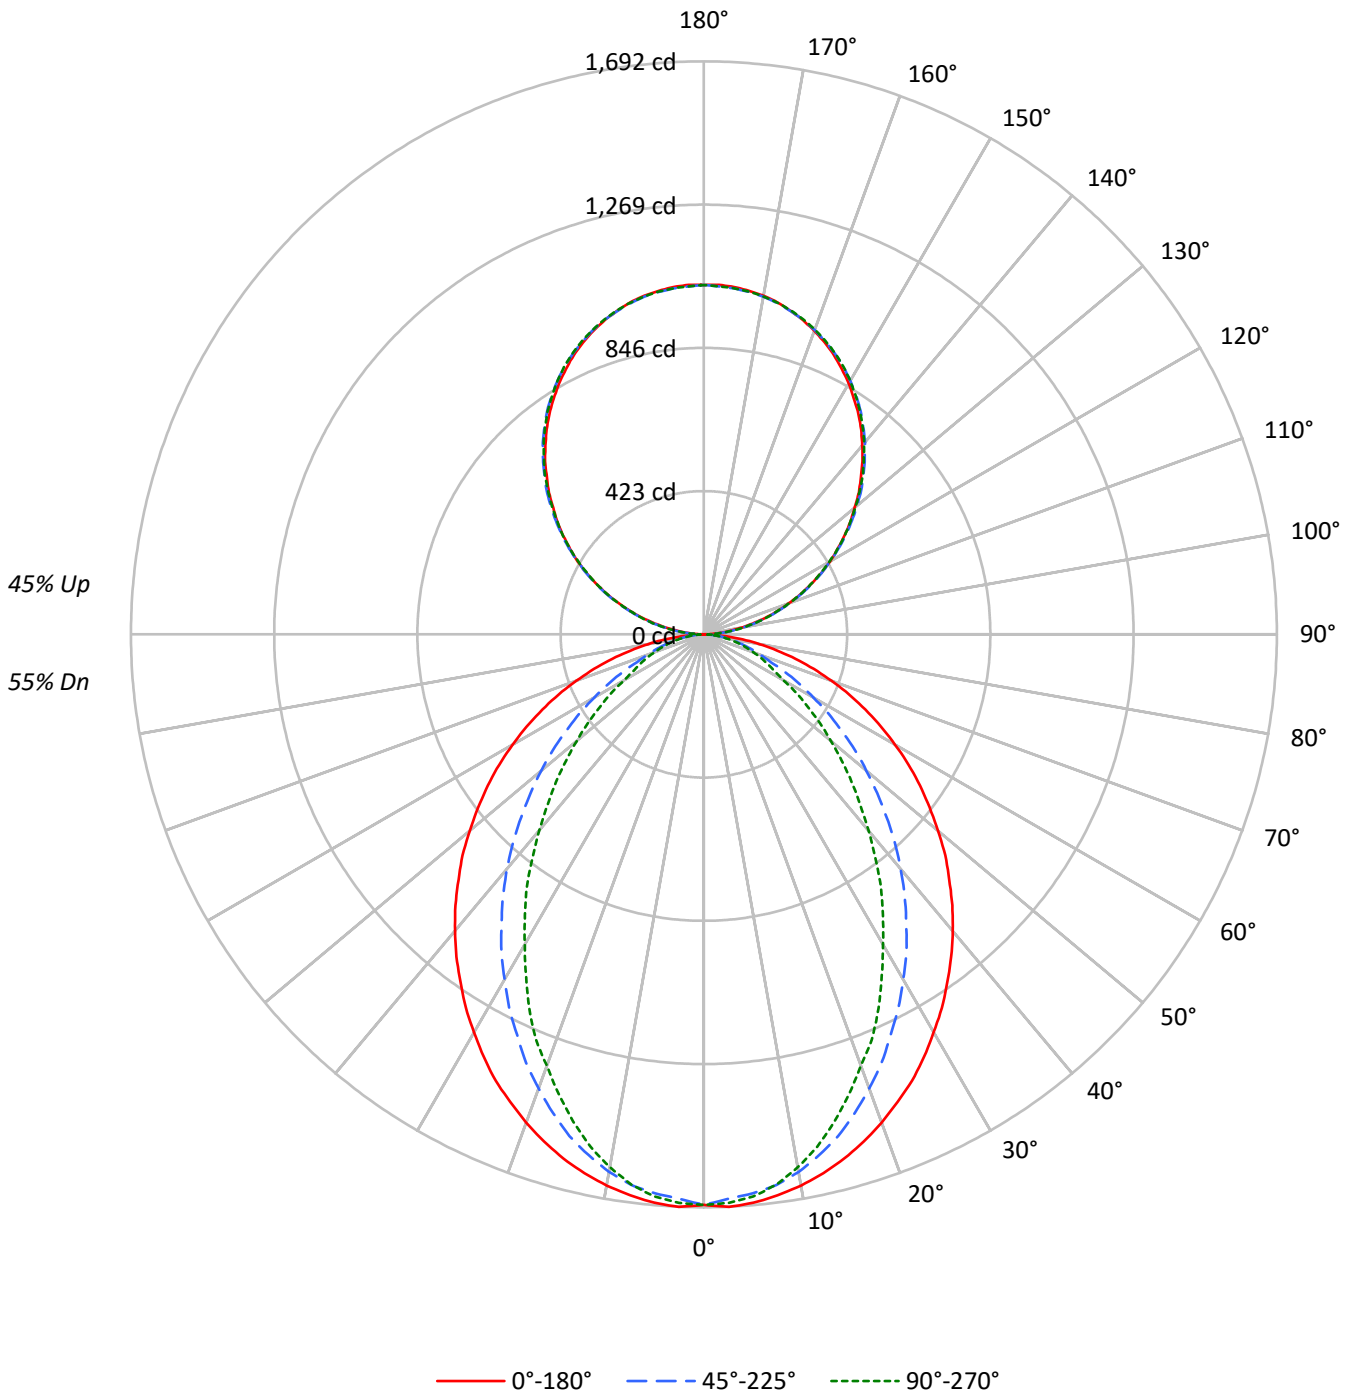



TEST NUMBER: P916650

CATALOG NUMBER: DFN2DIP-PN3F0-050D040US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	55		
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52	47		
2	91	84	78	73	84	78	73	69	67	63	60	57	55	52	48	46	45	40		
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	39	35		
4	76	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	30		
5	70	59	51	45	65	55	48	43	48	43	38	42	37	34	35	32	30	27		
6	65	53	45	40	60	50	43	38	44	38	34	38	33	30	32	29	26	24		
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	21		
8	56	44	36	31	52	41	34	30	36	31	27	32	27	24	27	24	21	19		
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	25	22	19	17		
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18	16		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1970	1970	1970
5°	1971	1937	1950
10°	1951	1898	1885
15°	1923	1833	1787
20°	1886	1746	1666
25°	1848	1648	1549
30°	1798	1547	1401
35°	1749	1439	1271
40°	1699	1328	1122
45°	1641	1204	987
50°	1581	1080	856
55°	1518	947	729
60°	1445	808	599
65°	1361	667	539
70°	1259	536	486
75°	1131	469	440
80°	946	389	379
85°	643	253	280

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 1641 cd/sqm



TEST NUMBER: P916650

CATALOG NUMBER: DFN2DIP-PN3F0-050D040US930-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.9	2.5
10°-20°	433.5	6.8
20°-30°	608.6	9.6
30°-40°	663.4	10.4
40°-50°	609.7	9.6
50°-60°	478.8	7.5
60°-70°	311.7	4.9
70°-80°	160.4	2.5
80°-90°	43.9	0.7
90°-100°	63.8	1.0
100°-110°	202.8	3.2
110°-120°	347.0	5.5
120°-130°	456.4	7.2
130°-140°	512.3	8.1
140°-150°	502.4	7.9
150°-160°	421.4	6.6
160°-170°	279.5	4.4
170°-180°	97.7	1.5
0°-30°	1200.0	18.9
0°-40°	1863.4	29.3
0°-60°	2951.9	46.5
0°-90°	3467.9	54.6
90°-120°	613.6	9.7
90°-150°	2084.7	32.8
90°-180°	2883.0	45.4
0°-180°	6351.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1685	1685	1685	1685	1685	
5°	1685	1677	1657	1671	1667	160
15°	1602	1586	1534	1505	1490	452
25°	1455	1406	1305	1243	1220	669
35°	1253	1176	1042	945	912	784
45°	1025	922	762	654	617	791
55°	779	660	496	404	375	696
65°	526	402	265	214	209	521
75°	280	174	122	111	110	297
85°	66	34	29	29	29	75
90°	1	11	30	29	30	6
95°	45	54	56	56	54	51
105°	187	190	192	193	193	198
115°	348	353	352	351	348	344
125°	506	514	512	509	508	453
135°	655	665	667	666	663	506
145°	795	802	807	808	804	497
155°	910	912	915	919	916	419
165°	989	988	988	995	990	279
175°	1030	1027	1025	1031	1026	98
180°	1031	1031	1031	1031	1031	



TEST NUMBER: P916650

CATALOG NUMBER: DFN2DIP-PN3F0-050D040US930-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1684.8	1684.8	1684.8	1684.8	1684.8
2.5°	1692.4	1684.8	1668.0	1683.3	1680.2
5°	1684.8	1677.2	1657.3	1671.0	1666.6
7.5°	1671.0	1662.0	1640.6	1646.7	1639.0
10°	1652.8	1642.1	1611.7	1607.0	1597.9
12.5°	1629.9	1616.2	1575.0	1565.9	1549.1
15°	1602.5	1585.7	1533.9	1505.0	1489.7
17.5°	1570.4	1546.1	1482.0	1448.5	1424.0
20°	1533.9	1503.3	1427.1	1389.1	1355.4
22.5°	1494.3	1459.1	1370.7	1318.9	1296.1
25°	1454.6	1405.7	1305.1	1242.7	1219.7
27.5°	1407.4	1355.4	1244.1	1172.5	1137.4
30°	1357.1	1299.0	1177.0	1099.3	1058.1
32.5°	1308.2	1238.0	1113.1	1021.6	983.4
35°	1253.4	1175.6	1041.5	945.3	911.7
37.5°	1200.0	1116.1	974.4	869.0	831.0
40°	1143.5	1052.1	904.1	795.9	756.3
42.5°	1085.7	988.1	834.1	721.1	683.1
45°	1024.7	922.4	762.4	654.0	617.4
47.5°	966.7	858.5	693.8	585.5	552.0
50°	902.7	794.4	626.7	521.4	489.5
52.5°	840.1	725.7	562.6	462.0	433.1
55°	779.1	660.1	495.5	404.1	375.1
57.5°	716.6	594.7	436.1	350.7	326.3
60°	652.6	530.6	373.5	295.9	271.4
62.5°	590.1	468.1	320.2	247.0	234.9
65°	526.0	402.5	265.3	213.5	208.9
67.5°	465.0	341.5	213.5	187.5	183.0
70°	401.0	282.1	176.8	161.6	155.5
72.5°	340.1	227.1	147.9	135.7	132.6
75°	280.5	173.7	122.0	111.3	109.8
77.5°	221.1	123.4	96.1	89.9	86.8
80°	166.2	88.5	73.1	67.1	67.1
82.5°	115.9	59.5	50.3	47.2	47.2
85°	65.5	33.5	28.9	28.9	28.9
87.5°	24.5	12.1	12.1	10.7	10.7
90°	0.9	11.2	30.5	28.6	29.5
92.5°	19.2	26.1	27.1	28.0	28.0
95°	45.4	54.1	55.7	55.7	54.1
97.5°	75.6	83.6	87.1	87.1	87.1
100°	110.4	117.6	120.0	120.0	119.1
102.5°	147.1	152.4	155.8	156.7	155.8
105°	187.2	189.6	191.5	193.1	193.1
107.5°	227.0	230.7	230.7	231.3	227.0
110°	265.5	270.5	270.5	270.5	268.1



TEST NUMBER: P916650

CATALOG NUMBER: DFN2DIP-PN3F0-050D040US930-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	307.2	312.5	311.5	309.1	307.2
115°	348.2	353.3	351.6	350.7	348.2
117.5°	389.0	395.8	391.5	389.0	386.5
120°	430.1	436.8	430.1	430.1	427.2
122.5°	467.3	476.1	471.7	469.2	467.3
125°	506.5	514.3	511.8	509.0	508.1
127.5°	544.8	554.4	551.0	547.2	544.8
130°	580.5	591.7	590.2	588.3	584.9
132.5°	620.6	629.3	630.0	625.6	623.1
135°	655.2	664.8	666.7	665.7	663.2
137.5°	693.7	701.5	703.0	702.4	698.7
140°	727.6	735.4	739.7	739.7	736.3
142.5°	762.5	770.2	772.7	773.6	770.2
145°	795.4	801.6	806.6	807.6	804.1
147.5°	824.9	832.7	836.4	838.0	834.5
150°	855.4	860.7	864.1	866.9	864.1
152.5°	882.5	887.7	892.1	895.5	892.1
155°	909.5	912.0	914.8	919.2	916.3
157.5°	932.9	934.7	936.2	942.5	938.1
160°	953.7	955.5	956.4	961.7	958.0
162.5°	972.9	972.9	973.9	979.7	975.4
165°	989.4	988.5	988.5	994.7	990.3
167.5°	1004.4	1001.5	1001.5	1007.8	1003.4
170°	1015.5	1013.0	1012.1	1018.3	1013.0
172.5°	1023.3	1020.8	1019.9	1026.1	1020.8
175°	1029.6	1027.0	1025.2	1031.4	1026.1
177.5°	1033.0	1030.5	1028.6	1033.9	1028.6
180°	1031.4	1031.4	1031.4	1031.4	1031.4



TEST NUMBER: P916650
 CATALOG NUMBER: DFN2DIP-PN3F0-050D040US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.88	10.75	10.81	11.69	12.89	5.85	6.72	6.77	7.65	8.86
	3H	11.56	12.33	12.49	13.28	14.51	7.03	7.81	7.97	8.76	9.99
	4H	12.16	12.90	13.11	13.85	15.09	7.48	8.22	8.43	9.17	10.41
	6H	12.58	13.26	13.54	14.21	15.47	7.80	8.47	8.76	9.43	10.68
	8H	12.71	13.35	13.67	14.32	15.57	7.89	8.53	8.86	9.50	10.75
	12H	12.77	13.38	13.74	14.35	15.62	7.93	8.54	8.90	9.51	10.78
4H	2H	9.90	10.64	10.86	11.59	12.83	6.44	7.18	7.40	8.13	9.37
	3H	11.73	12.34	12.69	13.32	14.57	7.79	8.40	8.76	9.38	10.64
	4H	12.42	12.97	13.39	13.95	15.23	8.34	8.89	9.31	9.87	11.15
	6H	12.93	13.41	13.92	14.41	15.68	8.75	9.23	9.74	10.23	11.50
	8H	13.10	13.55	14.09	14.54	15.83	8.88	9.32	9.86	10.31	11.61
	12H	13.20	13.60	14.20	14.61	15.90	8.94	9.34	9.95	10.35	11.65
8H	4H	12.39	12.83	13.38	13.83	15.12	8.62	9.06	9.60	10.05	11.35
	6H	12.95	13.32	13.96	14.35	15.64	9.13	9.50	10.14	10.53	11.82
	8H	13.16	13.49	14.18	14.51	15.81	9.31	9.64	10.33	10.66	11.97
	12H	13.30	13.58	14.32	14.60	15.95	9.43	9.71	10.45	10.73	12.08
12H	4H	12.34	12.74	13.35	13.75	15.05	8.62	9.02	9.63	10.03	11.33
	6H	12.92	13.25	13.94	14.27	15.58	9.17	9.50	10.20	10.52	11.83
	8H	13.14	13.43	14.16	14.44	15.79	9.38	9.67	10.40	10.68	12.03