

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916654

Luminaire Tested: DFN2DIP-PN3F0-050D050US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916654
REPORT IS A COMBINATION OF REPORTS P899544 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-050D050US930-RLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7072.7 lumens
Efficiency: N/A
Efficacy: 85.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 82.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916654

CATALOG NUMBER: DFN2DIP-PN3F0-050D050US930-RLLFLL

Luminous Intensity Polar Plot

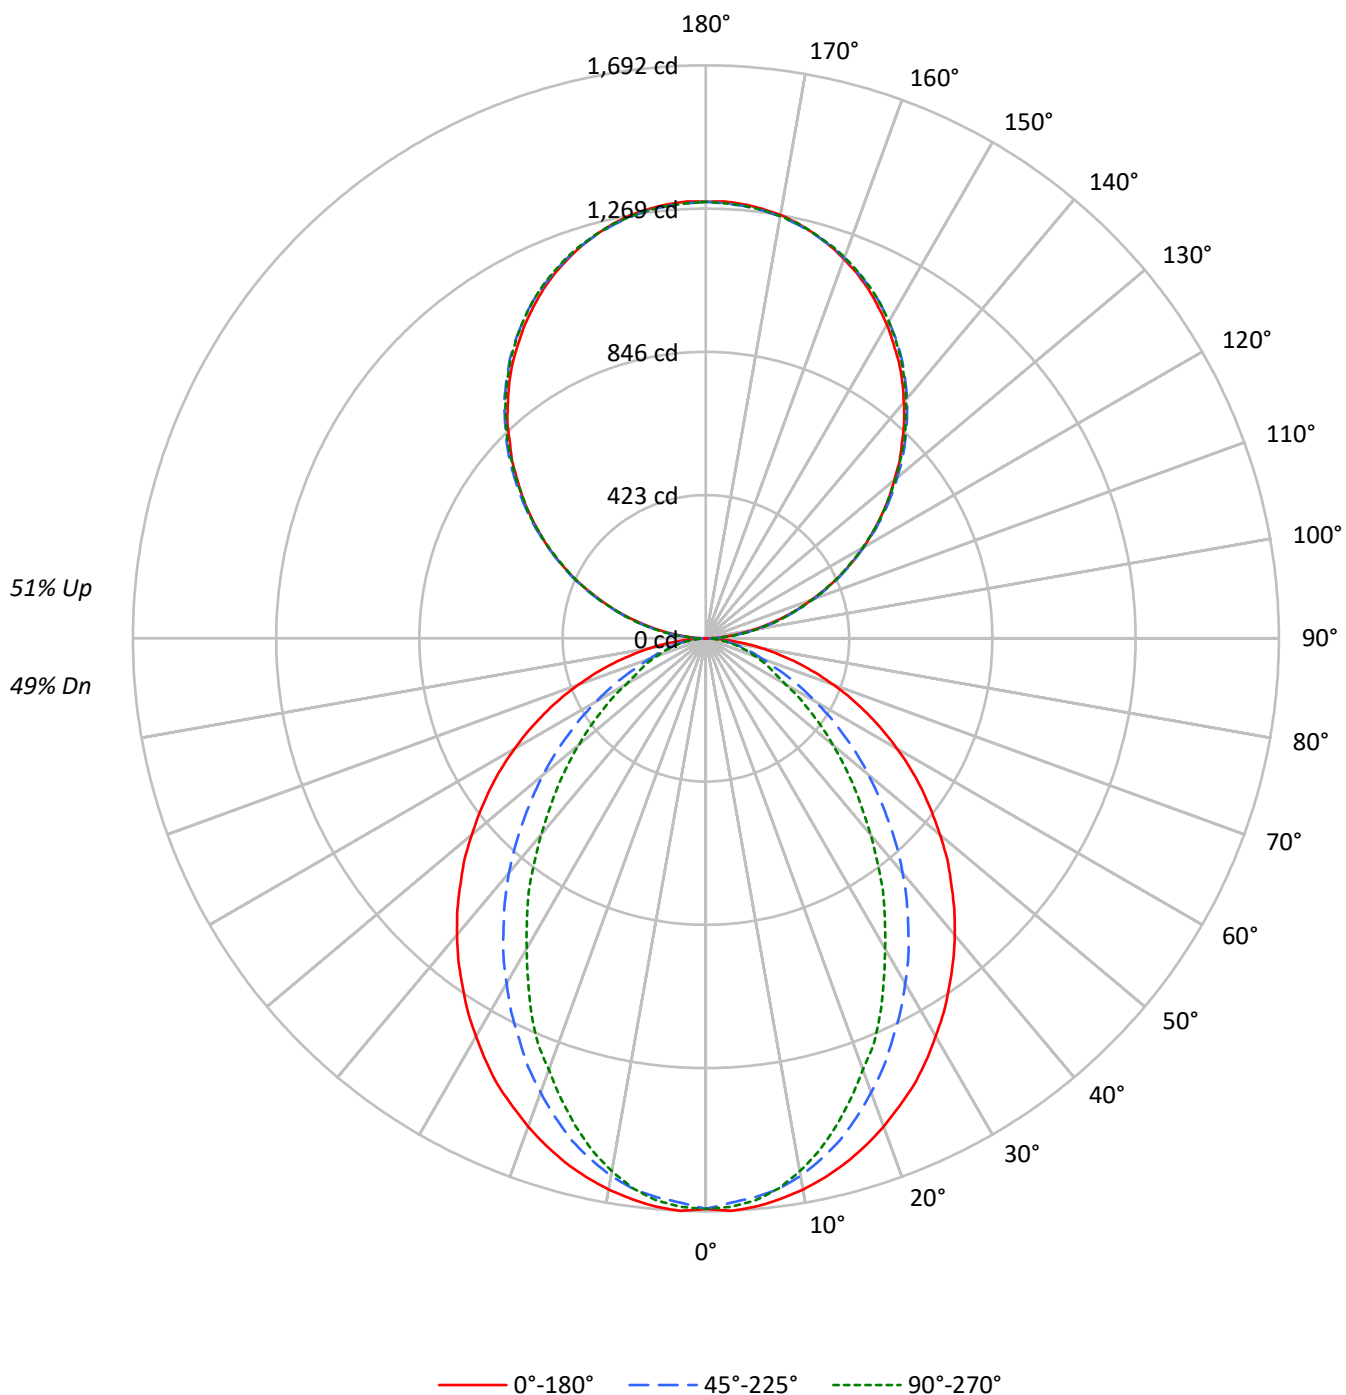

TEST NUMBER: P916654

CATALOG NUMBER: DFN2DIP-PN3F0-050D050US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1970	1970	1970
5°	1971	1937	1950
10°	1951	1898	1885
15°	1923	1833	1787
20°	1886	1746	1666
25°	1848	1648	1549
30°	1798	1547	1401
35°	1749	1439	1271
40°	1699	1328	1122
45°	1641	1204	987
50°	1581	1080	856
55°	1518	947	729
60°	1445	808	599
65°	1361	667	539
70°	1259	536	486
75°	1131	469	440
80°	946	389	379
85°	643	253	280

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1641 cd/sqm

TEST NUMBER: P916654

CATALOG NUMBER: DFN2DIP-PN3F0-050D050US930-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.9	2.2
10°-20°	433.5	6.1
20°-30°	608.6	8.6
30°-40°	663.4	9.4
40°-50°	609.7	8.6
50°-60°	478.8	6.8
60°-70°	311.7	4.4
70°-80°	160.4	2.3
80°-90°	44.6	0.6
90°-100°	79.8	1.1
100°-110°	253.5	3.6
110°-120°	433.8	6.1
120°-130°	570.5	8.1
130°-140°	640.4	9.1
140°-150°	627.9	8.9
150°-160°	526.8	7.4
160°-170°	349.3	4.9
170°-180°	122.1	1.7
0°-30°	1200.0	17.0
0°-40°	1863.4	26.3
0°-60°	2951.9	41.7
0°-90°	3468.7	49.0
90°-120°	767.0	10.8
90°-150°	2605.8	36.8
90°-180°	3604.0	51.0
0°-180°	7072.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1685	1685	1685	1685	1685	
5°	1685	1677	1657	1671	1667	160
15°	1602	1586	1534	1505	1490	452
25°	1455	1406	1305	1243	1220	669
35°	1253	1176	1042	945	912	784
45°	1025	922	762	654	617	791
55°	779	660	496	404	375	696
65°	526	402	265	214	209	521
75°	280	174	122	111	110	297
85°	66	34	29	29	29	75
90°	1	14	38	36	37	7
95°	57	68	70	70	68	63
105°	234	237	240	241	241	247
115°	435	442	440	438	435	431
125°	633	643	640	636	635	566
135°	819	831	833	832	829	633
145°	994	1002	1008	1009	1005	621
155°	1137	1140	1144	1149	1145	523
165°	1237	1236	1236	1243	1238	349
175°	1287	1284	1282	1289	1283	122
180°	1289	1289	1289	1289	1289	

TEST NUMBER: P916654

CATALOG NUMBER: DFN2DIP-PN3F0-050D050US930-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1684.8	1684.8	1684.8	1684.8	1684.8
2.5°	1692.4	1684.8	1668.0	1683.3	1680.2
5°	1684.8	1677.2	1657.3	1671.0	1666.6
7.5°	1671.0	1662.0	1640.6	1646.7	1639.0
10°	1652.8	1642.1	1611.7	1607.0	1597.9
12.5°	1629.9	1616.2	1575.0	1565.9	1549.1
15°	1602.5	1585.7	1533.9	1505.0	1489.7
17.5°	1570.4	1546.1	1482.0	1448.5	1424.0
20°	1533.9	1503.3	1427.1	1389.1	1355.4
22.5°	1494.3	1459.1	1370.7	1318.9	1296.1
25°	1454.6	1405.7	1305.1	1242.7	1219.7
27.5°	1407.4	1355.4	1244.1	1172.5	1137.4
30°	1357.1	1299.0	1177.0	1099.3	1058.1
32.5°	1308.2	1238.0	1113.1	1021.6	983.4
35°	1253.4	1175.6	1041.5	945.3	911.7
37.5°	1200.0	1116.1	974.4	869.0	831.0
40°	1143.5	1052.1	904.1	795.9	756.3
42.5°	1085.7	988.1	834.1	721.1	683.1
45°	1024.7	922.4	762.4	654.0	617.4
47.5°	966.7	858.5	693.8	585.5	552.0
50°	902.7	794.4	626.7	521.4	489.5
52.5°	840.1	725.7	562.6	462.0	433.1
55°	779.1	660.1	495.5	404.1	375.1
57.5°	716.6	594.7	436.1	350.7	326.3
60°	652.6	530.6	373.5	295.9	271.4
62.5°	590.1	468.1	320.2	247.0	234.9
65°	526.0	402.5	265.3	213.5	208.9
67.5°	465.0	341.5	213.5	187.5	183.0
70°	401.0	282.1	176.8	161.6	155.5
72.5°	340.1	227.1	147.9	135.7	132.6
75°	280.5	173.7	122.0	111.3	109.8
77.5°	221.1	123.4	96.1	89.9	86.8
80°	166.2	88.5	73.1	67.1	67.1
82.5°	115.9	59.5	50.3	47.2	47.2
85°	65.5	33.5	28.9	28.9	28.9
87.5°	24.5	12.1	12.1	10.7	10.7
90°	1.1	14.0	38.1	35.8	36.9
92.5°	24.1	32.6	33.8	35.0	35.0
95°	56.7	67.7	69.5	69.5	67.7
97.5°	94.4	104.5	108.8	108.8	108.8
100°	137.9	146.9	150.0	150.0	148.9
102.5°	183.8	190.5	194.7	195.9	194.7
105°	234.0	237.1	239.5	241.3	241.3
107.5°	283.7	288.4	288.4	289.2	283.7
110°	331.9	338.2	338.2	338.2	335.0



TEST NUMBER: P916654

CATALOG NUMBER: DFN2DIP-PN3F0-050D050US930-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	384.0	390.6	389.5	386.4	384.0
115°	435.3	441.6	439.6	438.5	435.3
117.5°	486.2	494.8	489.3	486.2	483.1
120°	537.5	546.1	537.5	537.5	534.0
122.5°	584.2	595.1	589.6	586.5	584.2
125°	633.2	642.9	639.8	636.3	635.1
127.5°	680.9	693.0	688.8	684.0	680.9
130°	725.7	739.6	737.7	735.4	731.1
132.5°	775.8	786.7	787.5	782.0	778.9
135°	819.0	831.0	833.3	832.2	829.1
137.5°	867.2	876.9	878.8	878.0	873.3
140°	909.5	919.2	924.6	924.6	920.4
142.5°	953.0	962.8	965.9	967.0	962.8
145°	994.3	1002.0	1008.2	1009.4	1005.1
147.5°	1031.2	1040.9	1045.5	1047.5	1043.2
150°	1069.3	1075.9	1080.1	1083.6	1080.1
152.5°	1103.1	1109.7	1115.1	1119.4	1115.1
155°	1136.9	1140.0	1143.5	1148.9	1145.4
157.5°	1166.0	1168.3	1170.3	1178.1	1172.6
160°	1192.0	1194.4	1195.6	1202.2	1197.5
162.5°	1216.2	1216.2	1217.3	1224.7	1219.3
165°	1236.8	1235.6	1235.6	1243.4	1237.9
167.5°	1255.4	1251.9	1251.9	1259.7	1254.3
170°	1269.4	1266.3	1265.2	1272.9	1266.3
172.5°	1279.1	1276.0	1274.9	1282.6	1276.0
175°	1286.9	1283.8	1281.5	1289.2	1282.6
177.5°	1291.2	1288.1	1285.7	1292.3	1285.7
180°	1289.2	1289.2	1289.2	1289.2	1289.2

TEST NUMBER: P916654

CATALOG NUMBER: DFN2DIP-PN3F0-050D050US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.37	10.19	10.34	11.18	12.46	5.34	6.16	6.31	7.14	8.43
	3H	11.04	11.78	12.03	12.77	14.08	6.52	7.25	7.50	8.25	9.56
	4H	11.65	12.34	12.64	13.34	14.65	6.96	7.66	7.96	8.65	9.97
	6H	12.06	12.70	13.07	13.70	15.03	7.28	7.92	8.29	8.92	10.25
	8H	12.19	12.79	13.20	13.81	15.14	7.37	7.98	8.38	8.99	10.32
	12H	12.25	12.82	13.26	13.83	15.18	7.41	7.99	8.42	8.99	10.35
4H	2H	9.39	10.08	10.39	11.08	12.39	5.93	6.62	6.93	7.62	8.94
	3H	11.21	11.79	12.22	12.81	14.14	7.27	7.85	8.28	8.87	10.20
	4H	11.90	12.42	12.91	13.44	14.79	7.81	8.34	8.83	9.36	10.71
	6H	12.40	12.86	13.43	13.90	15.25	8.23	8.68	9.26	9.72	11.07
	8H	12.58	13.00	13.61	14.03	15.40	8.35	8.77	9.38	9.81	11.17
	12H	12.67	13.05	13.72	14.10	15.47	8.41	8.79	9.46	9.84	11.21
8H	4H	11.86	12.28	12.89	13.32	14.68	8.09	8.51	9.12	9.54	10.91
	6H	12.42	12.77	13.47	13.84	15.21	8.60	8.95	9.65	10.02	11.39
	8H	12.63	12.94	13.69	14.00	15.38	8.78	9.09	9.85	10.15	11.53
	12H	12.77	13.04	13.83	14.09	15.52	8.90	9.17	9.96	10.22	11.65
12H	4H	11.81	12.19	12.86	13.24	14.61	8.09	8.48	9.14	9.52	10.89
	6H	12.39	12.70	13.46	13.76	15.14	8.65	8.95	9.71	10.01	11.40
	8H	12.61	12.88	13.68	13.93	15.36	8.85	9.12	9.92	10.17	11.60