

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916668

Luminaire Tested: DFN2DIP-PN3F0-050D090US930-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916668
REPORT IS A COMBINATION OF REPORTS P899599 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-050D090US930-FLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10529.5 lumens
Efficiency: N/A
Efficacy: 90.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 116.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9613
Total Harmonic Distortion (THDi): 0.083
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916668
CATALOG NUMBER: DFN2DIP-PN3F0-050D090US930-FLLFLL

Luminous Intensity Polar Plot

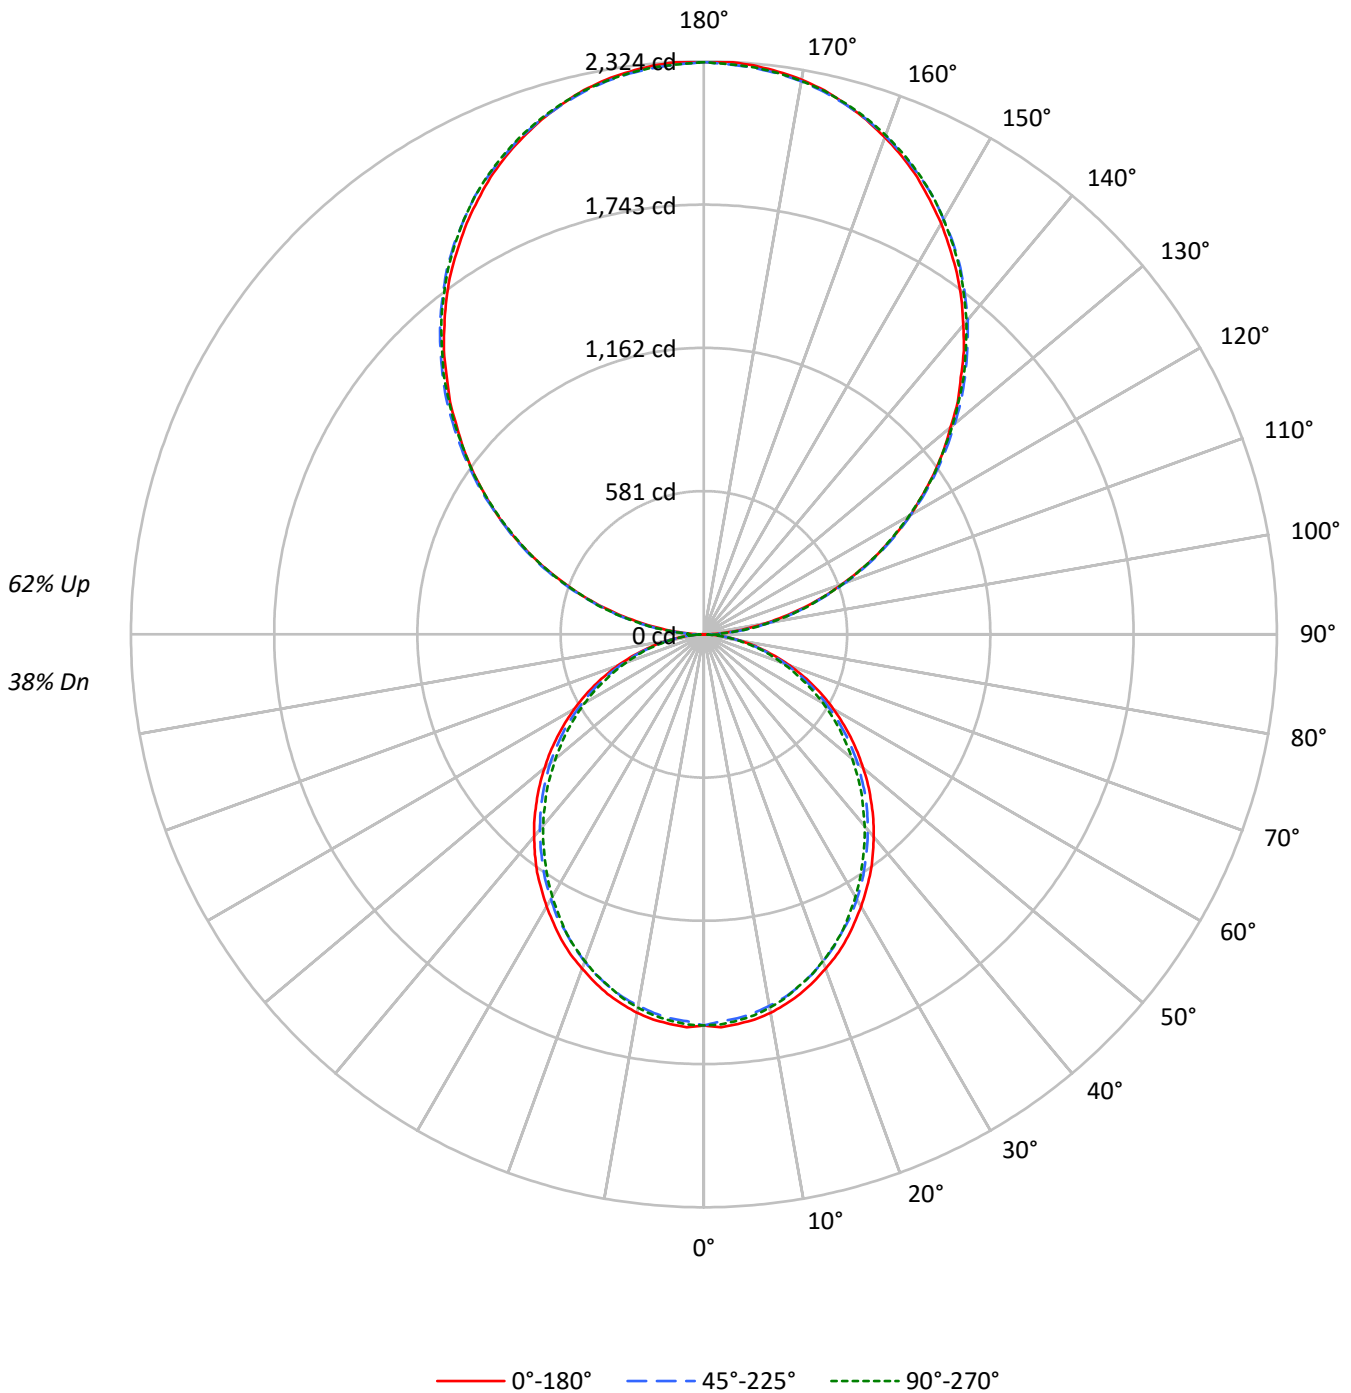



TEST NUMBER: P916668

CATALOG NUMBER: DFN2DIP-PN3F0-050D090US930-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	45	45	45	38				38
1	95	91	87	84	86	83	79	77	67	65	63	53	52	50	40	39	38	32				32
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32	27				27
3	79	70	63	57	71	64	57	52	52	47	44	41	38	35	31	29	27	23				23
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24	20				20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21	17				17
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18	15				15
7	56	44	36	31	51	41	34	29	34	28	25	27	23	20	21	18	16	13				13
8	52	40	33	27	47	37	30	25	31	25	22	25	21	18	19	16	14	12				12
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11				11
10	45	33	26	22	41	31	24	20	26	21	17	21	17	15	16	14	12	10				10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1854	1854	1854
5°	1856	1827	1840
10°	1840	1801	1814
15°	1812	1770	1774
20°	1774	1728	1734
25°	1737	1677	1687
30°	1690	1630	1628
35°	1645	1575	1565
40°	1591	1518	1505
45°	1537	1462	1444
50°	1477	1403	1373
55°	1415	1335	1308
60°	1344	1254	1233
65°	1267	1170	1145
70°	1169	1067	1050
75°	1033	944	961
80°	869	787	793
85°	613	521	517

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 2297 cd/sqm



TEST NUMBER: P916668

CATALOG NUMBER: DFN2DIP-PN3F0-050D090US930-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.3	1.4
10°-20°	420.0	4.0
20°-30°	617.3	5.9
30°-40°	717.0	6.8
40°-50°	716.1	6.8
50°-60°	624.4	5.9
60°-70°	461.6	4.4
70°-80°	261.1	2.5
80°-90°	75.5	0.7
90°-100°	143.6	1.4
100°-110°	456.3	4.3
110°-120°	780.8	7.4
120°-130°	1026.9	9.8
130°-140°	1152.6	10.9
140°-150°	1130.3	10.7
150°-160°	948.2	9.0
160°-170°	628.8	6.0
170°-180°	219.8	2.1
0°-30°	1186.6	11.3
0°-40°	1903.6	18.1
0°-60°	3244.1	30.8
0°-90°	4042.3	38.4
90°-120°	1380.7	13.1
90°-150°	4690.5	44.5
90°-180°	6487.0	61.6
0°-180°	10529.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1586	1586	1586	1586	1586	
5°	1586	1580	1563	1576	1573	151
15°	1510	1501	1481	1487	1480	425
25°	1367	1354	1328	1332	1328	629
35°	1179	1164	1139	1130	1123	736
45°	959	949	926	909	903	740
55°	726	717	698	680	673	649
65°	490	480	465	452	444	484
75°	256	253	246	236	240	273
85°	62	61	60	55	53	70
90°	2	25	69	64	66	10
95°	102	122	125	125	122	114
105°	421	427	431	434	434	444
115°	784	795	791	789	784	775
125°	1140	1157	1152	1145	1143	1018
135°	1474	1496	1500	1498	1492	1139
145°	1790	1804	1815	1817	1809	1118
155°	2046	2052	2058	2068	2062	942
165°	2226	2224	2224	2238	2228	628
175°	2316	2311	2307	2321	2309	220
180°	2321	2321	2321	2321	2321	



TEST NUMBER: P916668

CATALOG NUMBER: DFN2DIP-PN3F0-050D090US930-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1586.2	1586.2	1586.2	1586.2	1586.2
2.5°	1595.4	1587.8	1571.0	1586.2	1583.3
5°	1586.2	1580.2	1563.3	1575.5	1572.6
7.5°	1575.5	1566.4	1549.6	1561.9	1558.9
10°	1558.9	1548.2	1529.9	1542.0	1537.5
12.5°	1535.9	1526.8	1508.5	1516.1	1513.0
15°	1509.9	1500.9	1481.0	1487.2	1479.5
17.5°	1477.9	1468.8	1448.9	1456.5	1448.9
20°	1442.8	1433.8	1412.4	1416.9	1411.0
22.5°	1407.9	1394.1	1374.2	1374.2	1371.1
25°	1366.6	1354.5	1328.5	1331.5	1328.5
27.5°	1320.8	1310.1	1290.4	1285.8	1278.2
30°	1275.1	1262.9	1240.1	1235.5	1229.4
32.5°	1226.3	1217.2	1192.8	1183.6	1177.5
35°	1179.0	1163.8	1139.4	1130.2	1122.6
37.5°	1125.6	1111.9	1087.4	1076.8	1069.2
40°	1070.8	1058.5	1034.0	1020.4	1014.3
42.5°	1017.4	1005.1	980.8	965.4	956.3
45°	959.4	948.8	925.8	909.1	902.9
47.5°	902.9	892.3	867.9	851.0	842.0
50°	843.4	835.8	814.5	793.1	785.5
52.5°	785.5	774.8	755.0	738.3	727.6
55°	726.1	716.9	698.5	680.3	672.7
57.5°	666.5	658.9	639.0	620.8	614.6
60°	607.0	601.0	579.7	562.8	558.3
62.5°	549.1	538.4	523.2	507.9	501.8
65°	489.7	480.5	465.2	451.5	443.8
67.5°	428.7	420.9	407.3	396.6	390.4
70°	372.2	366.1	352.3	341.6	335.7
72.5°	314.3	308.1	300.5	289.8	285.3
75°	256.2	253.2	245.5	236.4	239.5
77.5°	204.4	198.2	195.2	190.6	186.1
80°	152.6	151.0	147.9	143.4	140.3
82.5°	103.7	103.7	102.2	96.1	96.1
85°	62.5	61.0	59.5	54.9	53.4
87.5°	27.5	24.5	21.4	16.8	15.2
90°	2.1	25.2	68.6	64.3	66.4
92.5°	43.4	58.8	60.9	62.9	62.9
95°	102.2	121.7	125.2	125.2	121.7
97.5°	170.0	188.2	195.9	195.9	195.9
100°	248.3	264.5	270.0	270.0	268.0
102.5°	330.9	342.8	350.5	352.6	350.5
105°	421.2	426.7	431.0	434.5	434.5
107.5°	510.7	519.1	519.1	520.5	510.7
110°	597.5	608.7	608.7	608.7	603.1



TEST NUMBER: P916668

CATALOG NUMBER: DFN2DIP-PN3F0-050D090US930-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	691.2	703.1	701.0	695.4	691.2
115°	783.6	794.8	791.2	789.2	783.6
117.5°	875.2	890.6	880.8	875.2	869.6
120°	967.6	982.9	967.6	967.6	961.2
122.5°	1051.5	1071.1	1061.4	1055.7	1051.5
125°	1139.7	1157.2	1151.6	1145.2	1143.2
127.5°	1225.7	1247.4	1239.7	1231.3	1225.7
130°	1306.2	1331.4	1327.9	1323.6	1316.0
132.5°	1396.4	1416.0	1417.4	1407.6	1402.1
135°	1474.1	1495.7	1500.0	1497.9	1492.3
137.5°	1560.8	1578.3	1581.8	1580.5	1572.1
140°	1637.1	1654.6	1664.3	1664.3	1656.7
142.5°	1715.5	1732.9	1738.5	1740.7	1732.9
145°	1789.7	1803.6	1814.8	1816.9	1809.2
147.5°	1856.1	1873.6	1882.0	1885.5	1877.8
150°	1924.7	1936.6	1944.2	1950.5	1944.2
152.5°	1985.5	1997.4	2007.2	2014.9	2007.2
155°	2046.4	2051.9	2058.3	2068.1	2061.8
157.5°	2098.8	2103.1	2106.6	2120.5	2110.7
160°	2145.7	2149.9	2152.1	2163.9	2155.5
162.5°	2189.1	2189.1	2191.2	2204.5	2194.7
165°	2226.2	2224.1	2224.1	2238.1	2228.3
167.5°	2259.8	2253.5	2253.5	2267.4	2257.6
170°	2285.0	2279.3	2277.3	2291.2	2279.3
172.5°	2302.4	2296.9	2294.7	2308.8	2296.9
175°	2316.4	2310.8	2306.6	2320.7	2308.8
177.5°	2324.1	2318.5	2314.3	2326.2	2314.3
180°	2320.7	2320.7	2320.7	2320.7	2320.7



TEST NUMBER: P916668
 CATALOG NUMBER: DFN2DIP-PN3F0-050D090US930-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.20	8.96	9.25	10.02	11.45	7.76	8.52	8.81	9.58	11.01
	3H	9.84	10.53	10.90	11.59	13.04	9.36	10.05	10.42	11.11	12.56
	4H	10.42	11.07	11.49	12.14	13.59	9.94	10.59	11.01	11.65	13.11
	6H	10.81	11.41	11.89	12.48	13.95	10.32	10.92	11.41	11.99	13.46
	8H	10.91	11.48	12.00	12.57	14.03	10.42	10.99	11.51	12.08	13.54
	12H	10.96	11.50	12.05	12.58	14.06	10.46	11.00	11.55	12.08	13.56
4H	2H	8.64	9.29	9.72	10.36	11.81	8.29	8.94	9.37	10.01	11.46
	3H	10.49	11.04	11.58	12.13	13.60	10.09	10.63	11.18	11.73	13.19
	4H	11.20	11.70	12.29	12.78	14.27	10.78	11.28	11.87	12.36	13.85
	6H	11.70	12.13	12.80	13.24	14.72	11.28	11.71	12.38	12.81	14.29
	8H	11.85	12.25	12.95	13.35	14.84	11.42	11.82	12.52	12.92	14.42
	12H	11.91	12.27	13.03	13.39	14.89	11.47	11.84	12.59	12.95	14.45
8H	4H	11.38	11.78	12.48	12.88	14.38	11.01	11.41	12.11	12.51	14.01
	6H	12.00	12.33	13.12	13.47	14.97	11.63	11.96	12.75	13.10	14.59
	8H	12.22	12.51	13.35	13.63	15.14	11.84	12.12	12.96	13.25	14.76
	12H	12.34	12.60	13.47	13.71	15.26	11.94	12.20	13.07	13.31	14.86
12H	4H	11.36	11.73	12.48	12.84	14.34	11.00	11.36	12.12	12.48	13.98
	6H	12.03	12.32	13.16	13.44	14.96	11.67	11.96	12.79	13.08	14.59
	8H	12.26	12.52	13.39	13.64	15.19	11.89	12.15	13.02	13.26	14.81