

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P916696

Luminaire Tested: DFN2DIP-PN3F0-060D090US930-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P916696
REPORT IS A COMBINATION OF REPORTS P899601 AND P896399
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN3F0-060D090US930-FLLFLL
Description: 3 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11336.7 lumens
Efficiency: N/A
Efficacy: 88.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.96' x L: 3.11' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 128.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9821
Total Harmonic Distortion (THDi): 0.08
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P916696

CATALOG NUMBER: DFN2DIP-PN3F0-060D090US930-FLLFLL

Luminous Intensity Polar Plot

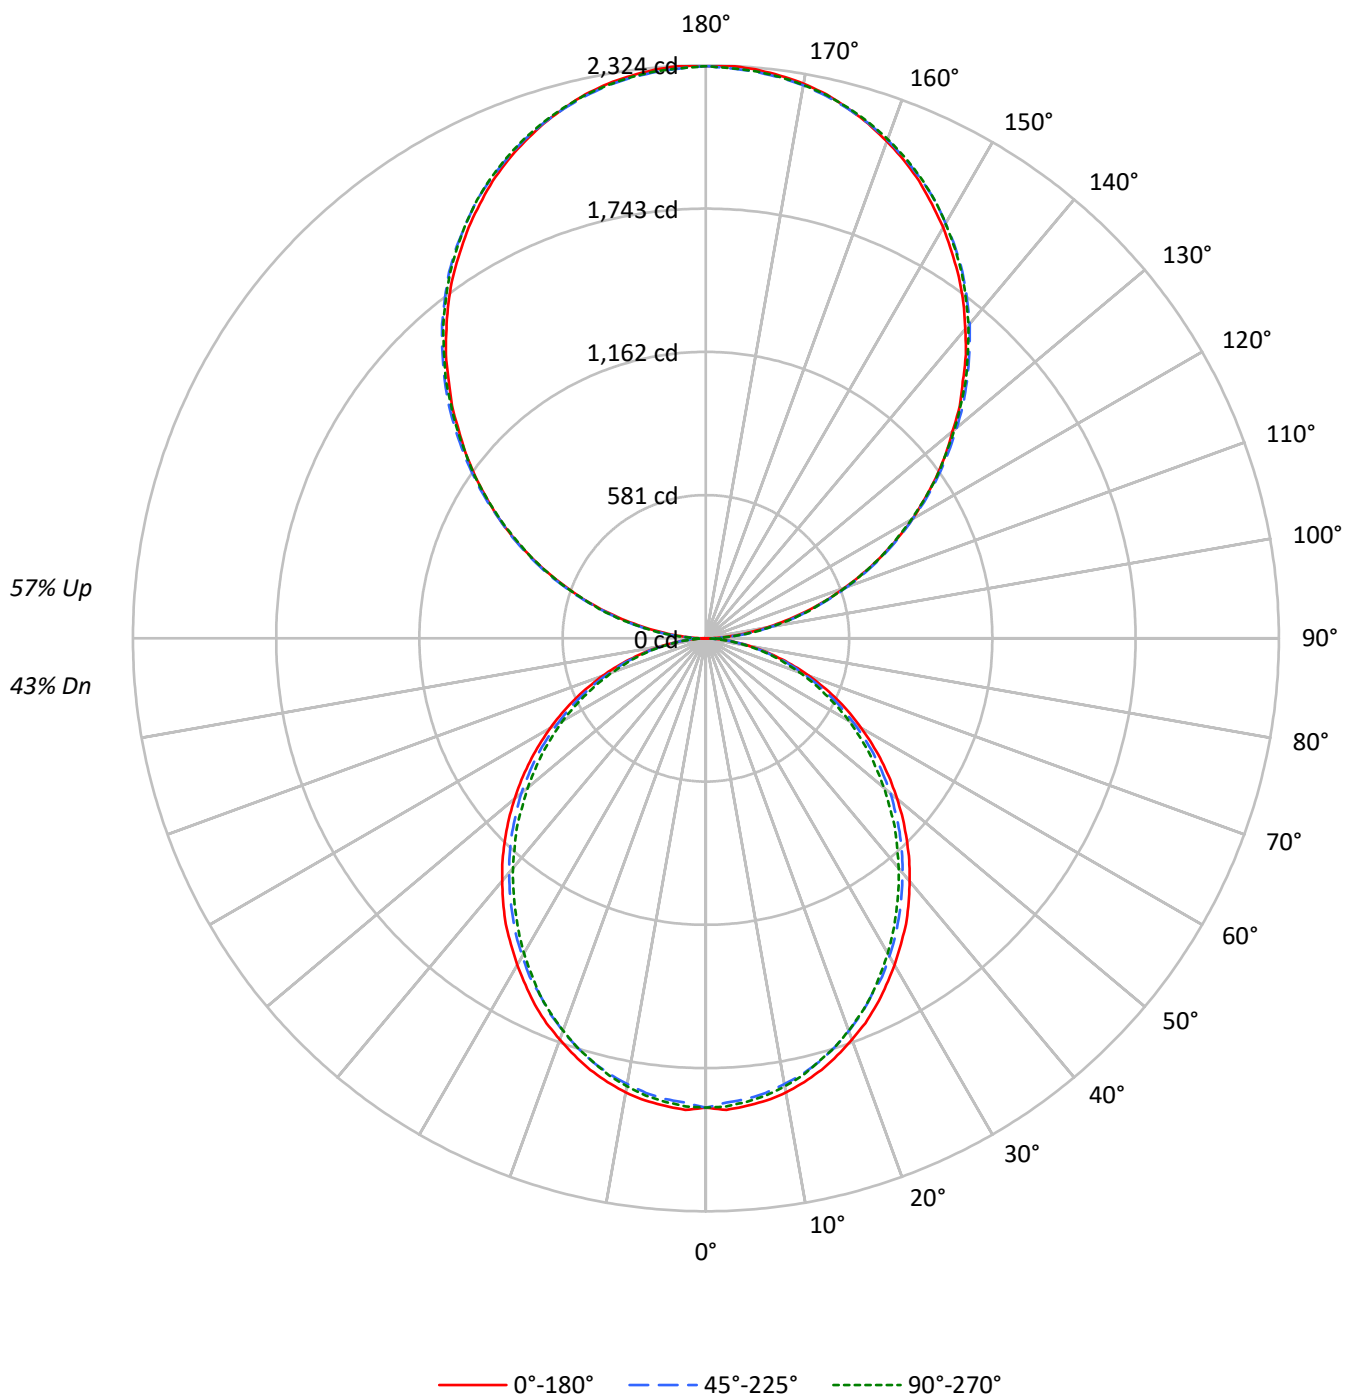

TEST NUMBER: P916696

CATALOG NUMBER: DFN2DIP-PN3F0-060D090US930-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	44	43	42
2	88	80	74	69	80	73	68	64	61	57	54	49	47	44	38	37	35
3	80	70	63	57	73	65	58	53	54	49	45	44	40	37	34	32	30
4	73	62	55	49	66	57	50	45	48	43	39	39	35	32	30	28	26
5	67	56	47	42	61	51	44	39	43	37	33	35	31	28	27	25	22
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	25	22	20
7	57	45	37	31	52	41	34	29	35	29	25	29	24	21	23	20	18
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14
10	46	34	27	22	42	31	25	21	27	22	18	22	18	15	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2225	2225	2225
5°	2227	2192	2208
10°	2208	2161	2177
15°	2174	2124	2129
20°	2129	2073	2081
25°	2084	2012	2024
30°	2028	1956	1953
35°	1975	1890	1878
40°	1909	1822	1806
45°	1844	1755	1733
50°	1773	1684	1648
55°	1698	1602	1569
60°	1613	1505	1480
65°	1521	1404	1374
70°	1403	1281	1260
75°	1240	1133	1153
80°	1043	945	951
85°	735	625	620

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2297 cd/sqm

TEST NUMBER: P916696

CATALOG NUMBER: DFN2DIP-PN3F0-060D090US930-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	179.1	1.6
10°-20°	504.1	4.4
20°-30°	740.8	6.5
30°-40°	860.4	7.6
40°-50°	859.3	7.6
50°-60°	749.3	6.6
60°-70°	553.9	4.9
70°-80°	313.4	2.8
80°-90°	89.3	0.8
90°-100°	143.6	1.3
100°-110°	456.3	4.0
110°-120°	780.8	6.9
120°-130°	1026.9	9.1
130°-140°	1152.6	10.2
140°-150°	1130.3	10.0
150°-160°	948.2	8.4
160°-170°	628.8	5.5
170°-180°	219.8	1.9
0°-30°	1424.0	12.6
0°-40°	2284.3	20.1
0°-60°	3892.9	34.3
0°-90°	4849.5	42.8
90°-120°	1380.7	12.2
90°-150°	4690.5	41.4
90°-180°	6487.0	57.2
0°-180°	11336.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1903	1903	1903	1903	1903	
5°	1903	1896	1876	1891	1887	181
15°	1812	1801	1777	1785	1776	510
25°	1640	1625	1594	1598	1594	755
35°	1415	1397	1367	1356	1347	884
45°	1151	1138	1111	1091	1084	889
55°	871	860	838	816	807	779
65°	588	577	558	542	533	581
75°	307	304	295	284	287	328
85°	75	73	71	66	64	84
90°	2	25	69	64	66	11
95°	102	122	125	125	122	114
105°	421	427	431	434	434	444
115°	784	795	791	789	784	775
125°	1140	1157	1152	1145	1143	1018
135°	1474	1496	1500	1498	1492	1139
145°	1790	1804	1815	1817	1809	1118
155°	2046	2052	2058	2068	2062	942
165°	2226	2224	2224	2238	2228	628
175°	2316	2311	2307	2321	2309	220
180°	2321	2321	2321	2321	2321	

TEST NUMBER: P916696

CATALOG NUMBER: DFN2DIP-PN3F0-060D090US930-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1903.4	1903.4	1903.4	1903.4	1903.4
2.5°	1914.5	1905.4	1885.1	1903.4	1899.9
5°	1903.4	1896.2	1876.0	1890.6	1887.1
7.5°	1890.6	1879.8	1859.5	1874.3	1870.6
10°	1870.6	1857.8	1835.8	1850.4	1844.9
12.5°	1843.1	1832.1	1810.2	1819.3	1815.7
15°	1811.9	1801.1	1777.2	1784.6	1775.5
17.5°	1773.5	1762.7	1738.8	1747.8	1738.8
20°	1731.4	1720.5	1694.8	1700.3	1693.1
22.5°	1689.5	1672.9	1649.0	1649.0	1645.4
25°	1639.9	1625.4	1594.2	1597.7	1594.2
27.5°	1584.9	1572.1	1548.4	1543.0	1533.9
30°	1530.2	1515.4	1488.1	1482.6	1475.2
32.5°	1471.5	1460.7	1431.3	1420.2	1412.9
35°	1414.9	1396.6	1367.3	1356.2	1347.0
37.5°	1350.8	1334.2	1305.0	1292.1	1283.0
40°	1284.9	1270.2	1240.9	1224.6	1217.2
42.5°	1220.8	1206.1	1177.0	1158.5	1147.6
45°	1151.4	1138.5	1110.9	1091.0	1083.5
47.5°	1083.5	1070.7	1041.5	1021.2	1010.3
50°	1012.1	1003.0	977.4	951.7	942.6
52.5°	942.6	929.8	906.0	885.9	873.1
55°	871.3	860.2	838.3	816.4	807.2
57.5°	799.9	790.8	766.9	744.9	737.5
60°	728.4	721.2	695.6	675.4	669.9
62.5°	658.8	646.0	627.8	609.5	602.2
65°	587.6	576.6	558.3	541.8	532.6
67.5°	514.4	505.1	488.8	476.0	468.6
70°	446.6	439.3	422.7	409.9	402.8
72.5°	377.1	369.7	360.6	347.8	342.3
75°	307.4	303.9	294.6	283.7	287.4
77.5°	245.2	237.9	234.2	228.8	223.3
80°	183.1	181.2	177.5	172.0	168.4
82.5°	124.5	124.5	122.7	115.4	115.4
85°	74.9	73.2	71.4	65.8	64.1
87.5°	33.0	29.4	25.6	20.2	18.3
90°	2.1	25.2	68.6	64.3	66.4
92.5°	43.4	58.8	60.9	62.9	62.9
95°	102.2	121.7	125.2	125.2	121.7
97.5°	170.0	188.2	195.9	195.9	195.9
100°	248.3	264.5	270.0	270.0	268.0
102.5°	330.9	342.8	350.5	352.6	350.5
105°	421.2	426.7	431.0	434.5	434.5
107.5°	510.7	519.1	519.1	520.5	510.7
110°	597.5	608.7	608.7	608.7	603.1

TEST NUMBER: P916696

CATALOG NUMBER: DFN2DIP-PN3F0-060D090US930-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	691.2	703.1	701.0	695.4	691.2
115°	783.6	794.8	791.2	789.2	783.6
117.5°	875.2	890.6	880.8	875.2	869.6
120°	967.6	982.9	967.6	967.6	961.2
122.5°	1051.5	1071.1	1061.4	1055.7	1051.5
125°	1139.7	1157.2	1151.6	1145.2	1143.2
127.5°	1225.7	1247.4	1239.7	1231.3	1225.7
130°	1306.2	1331.4	1327.9	1323.6	1316.0
132.5°	1396.4	1416.0	1417.4	1407.6	1402.1
135°	1474.1	1495.7	1500.0	1497.9	1492.3
137.5°	1560.8	1578.3	1581.8	1580.5	1572.1
140°	1637.1	1654.6	1664.3	1664.3	1656.7
142.5°	1715.5	1732.9	1738.5	1740.7	1732.9
145°	1789.7	1803.6	1814.8	1816.9	1809.2
147.5°	1856.1	1873.6	1882.0	1885.5	1877.8
150°	1924.7	1936.6	1944.2	1950.5	1944.2
152.5°	1985.5	1997.4	2007.2	2014.9	2007.2
155°	2046.4	2051.9	2058.3	2068.1	2061.8
157.5°	2098.8	2103.1	2106.6	2120.5	2110.7
160°	2145.7	2149.9	2152.1	2163.9	2155.5
162.5°	2189.1	2189.1	2191.2	2204.5	2194.7
165°	2226.2	2224.1	2224.1	2238.1	2228.3
167.5°	2259.8	2253.5	2253.5	2267.4	2257.6
170°	2285.0	2279.3	2277.3	2291.2	2279.3
172.5°	2302.4	2296.9	2294.7	2308.8	2296.9
175°	2316.4	2310.8	2306.6	2320.7	2308.8
177.5°	2324.1	2318.5	2314.3	2326.2	2314.3
180°	2320.7	2320.7	2320.7	2320.7	2320.7

TEST NUMBER: P916696

CATALOG NUMBER: DFN2DIP-PN3F0-060D090US930-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.30	10.10	10.32	11.13	12.50	8.86	9.66	9.88	10.69	12.06
	3H	10.95	11.67	11.98	12.70	14.10	10.47	11.19	11.50	12.22	13.61
	4H	11.53	12.21	12.57	13.25	14.65	11.05	11.73	12.09	12.77	14.16
	6H	11.93	12.55	12.98	13.59	15.00	11.44	12.06	12.49	13.10	14.51
	8H	12.03	12.62	13.08	13.68	15.09	11.54	12.13	12.59	13.19	14.60
	12H	12.07	12.64	13.13	13.69	15.12	11.57	12.14	12.63	13.19	14.62
4H	2H	9.75	10.43	10.80	11.47	12.87	9.40	10.08	10.45	11.12	12.52
	3H	11.61	12.17	12.66	13.24	14.65	11.21	11.77	12.26	12.84	14.25
	4H	12.31	12.83	13.37	13.89	15.32	11.90	12.42	12.96	13.47	14.91
	6H	12.82	13.27	13.89	14.35	15.77	12.40	12.84	13.47	13.92	15.35
	8H	12.96	13.38	14.03	14.45	15.90	12.54	12.96	13.61	14.03	15.47
	12H	13.03	13.41	14.12	14.50	15.94	12.59	12.97	13.68	14.06	15.51
8H	4H	12.50	12.92	13.57	13.99	15.43	12.13	12.55	13.20	13.62	15.06
	6H	13.12	13.47	14.22	14.58	16.02	12.75	13.09	13.84	14.21	15.65
	8H	13.34	13.64	14.44	14.74	16.20	12.96	13.26	14.06	14.35	15.81
	12H	13.46	13.73	14.57	14.82	16.32	13.06	13.33	14.17	14.42	15.92
12H	4H	12.48	12.86	13.57	13.95	15.40	12.12	12.50	13.21	13.58	15.03
	6H	13.15	13.45	14.25	14.55	16.01	12.79	13.09	13.89	14.19	15.65
	8H	13.38	13.65	14.49	14.74	16.24	13.01	13.28	14.12	14.37	15.87